

The Boobytrap Recognition Manual

Volume 4A1

USSR/Russian Firing Devices and
related material



D.W. Lynn & George Zahaczewsky

2021

Updated 2026

**Copyright © Darryl W. Lynn and George Zahaczewsky
2021
Amendment 1, 2026**

This is a free publication, not to be sold.

INTRODUCTION

This update to a previous version of this document was deemed appropriate given the continuing hostilities in the Russian-Ukrainian conflict and the emergence of some new munitions, as well as some technical information that was previously unavailable. As combat operations have evolved, many otherwise unknown munitions have surfaced, which is what prompted this update to the 2021 publication pertaining to Russian firing devices, specifically those that can be utilized as boobytraps.

As in the past, this publication will only detail officially manufactured mechanisms, and incorporates officially released specifications and capabilities. We will not attempt to describe any improvised devices or methods in this document. The items are not presented in a chronological order but are instead listed in an alpha numeric sequence to make them easier to find.

The technical information contained in this document has been gleaned from a variety of open information sources, to include some of those released by the Russian government. As always, we are appreciative for your comments to correct and update our technical data. It should also be noted that the images are certainly not all ours. We have been collecting photos from other collectors, museums, as well as off the Internet for quite some time and, as a result of poor record keeping in many cases, we have no idea where we found some of the enclosed images. Where known, we have acknowledged it in the credits page. If you find one of your photos in here and your name is not in the credits, please accept our apologies for using your image(s) without your permission, and let us know so that we can make corrections in any future updates.

There are many divisions today in both national and international society. Thinking globally, the exchange of information pertaining to unexploded ordnance (UXO) is essential in helping the small planet that we live on to recover from the various conflicts that we have endured over the past millennia. Therefore, please accept this information for the reason that it was intended, to keep everyone safe from UXO.

RUSSIAN ACRONYMS

BKM = БКМ (Беспроводной Комплект Минирования) = “wireless mining kit”

ChV/ChMV = ЧВ/ЧМВ (Часовой Взрыватель) = “clockwork fuze”

ChZ = ЧВЗ (Часовой Замыкатель) = “clockwork circuit closer”

ED = ЭД (Электро Детонатор) = “electric detonator”

EKhV = ЭХВ (Электро-Химический Взрыватель) = “electro-chemical fuze”

EKhZ = ЭХЗ (Электро-Химический Замыкатель) = “electro-chemical circuit closer”

KhV = ХВ (Химический Взрыватель) = “chemical fuze”

MD = МД (Механический Детонатор) = “mechanical detonator”

ML = МЛ (Мина Ловушка) = “trap mine”

MS = МС (Мины Сюрпризы) = “surprise mine”

MUV = МУВ (Модернизированный Упрощённый Взрыватель) = “modernized simplified fuze”

MV = МВ (Механический Взрыватель) = “mechanical fuze”

MVE = МВЭ (Минный Взрыватель Электронный) = “electronic-fuzed mine”

NVU = НВУ (Неконтактное Взрывательное Устройство) = “noncontact explosive device”

PMP = ПМП (Противопехотная Мина Пластмасса) = “antipersonnel mine, plastic”

PV = ПВ (Поездной Взрыватель) = “train fuze”

PVU = ПВУ (Противопоездное Взрывательное Устройство) = “anti-train explosive device”

UV = УВ (Упрощённый Взрыватель) = “simplified fuze”

VPF = ВПФ (Взрыватель Полевых Фугасов) = “fuze for field fougasse”

VPZ = ВПЗ (Взрыватель Подводных Зарядов) = “fuze for underwater charge”

VUZ = ВУЗ (Взрывательное Устройство) = “explosive device”

VV = ВВ (Взрывчатые Вещества) = “explosive substance”

VZ = ВЗ (Вибрационный Замыкатель) = “vibration circuit closer”

VZD = ВЗД (Взрыватель Замедленного Действия) = “fuze delayed action”

VZDKh = ВЗДХ (Взрыватель Замедленного Действия, Химический) = “fuze delayed action, chemical”

INDEX

Designation	Type	Page
BKM-6	Concussion	3
ChMV-10	Delay	5
ChMV-16	Delay	6
ChMV-60	Delay	7
ChMV-120	Delay	9
ChVZ	Vibration	11
ChZ-10	Delay	12
ChZ-35 (cylindrical)	Delay	13
ChZ-35 (Rectangular)	Delay	14
ChZ-B	Delay	15
EDP/EDPr	Detonator	106
EKhP	Delay Element	16
EKhV	Delay	17
EKhV-5	Delay	19
EKhV-7	Delay	20
EKhZ	Pressure/Impact	22
EKhZ	Delay	23
EN	Anti-withdrawal	24
F-10	Command Detonation	25
IZER-2	Vibration	27
Koveshnikov	Pressure-Release/Pull	28
MD-2	Detonator	105
MD-5	Detonator	105
MD-5M	Detonator	106
ML-7	Pressure-Release	30
ML-8	Pressure-Release	33
MPM-E	Vibration	35
MS-2	Pressure-Release	36
MS-3	Pressure-Release	37
MS-4	Anti-disturbance	39
MS-5	Pressure-Release	41
MUV	Pressure/Pull	45
MUV-2	Pressure/Pull	47
MUV-3	Pressure/Pull	49
MUV-4	Pressure/Pull	50
MV-1	Delay	52
MV-2	Delay	53
MV-3	Delay	54
MV-3K	Delay	55
MV-5	Pressure	56
MV-5K	Pressure	57
MVE-08	Collapsing Circuit	58
MVE-72	Collapsing Circuit	59
MVE-92	Collapsing Circuit	60
MVE-NS	Multifunction	61
MY-8	Delay	63
MZD-21	Anti-disturbance	64
MZU and MZU-S	Multifunction	65
MZU-2	Multifunction	67

NM/NM-71	Initiator	107
NVU-P and NVU-PM	Seismic	69
NVU-P2	Seismic	71
PV-42	Pressure	73
PVU-79	Pressure	75
PZ-12	Pressure	77
SM-12	Frequency Induction	78
SVPPM	Seismic	79
UV	Pressure/Pull	43
UVG	Pressure/Pull	44
VP-04	Seismic	80
VPF	Pull	81
VPZ-1 and VZLS	Concussion	82
VUZ-2	Impulse Generator	84
VUZ-4	Impulse Generator	86
VUZ-8	Impulse Generator	88
VZ-1	Vibration	90
VZD	Contact Switch	108
VZD-1M	Delay	91
VZD-3M	Delay	93
VZD-6Ch	Delay	95
VZD-12Ch	Delay	97
VZD-20M	Delay	98
VZD-100Ch	Delay	99
VZD-135	Delay	100
VZD-144 and VZD-144Ch	Delay	101
VZDKh	Delay	103
Wooden Pressure fuze	Pressure	1
Wood capped Metallic pressure fuze	Pressure	2
ZTP-M and ZTP-T	Fuse Igniter	109
ZTP-50	Ignition set	110
ZTP-150	Ignition set	111
ZTP-300	Ignition set	111
ZTP-600	Ignition set	112

Wooden Pressure Fuze (Designation unknown)

Type - Pressure


Length - 2.6 in. (67 mm)

Diameter - 1.0 in. (25 mm)

This can only be described as a stopgap firing device to be used until more effective devices could be developed. Likely only used in the early period of WWII. It was designed to be used in non-metallic mines but could also be used for pressure activated boobytraps. The device is made completely of wood and cardboard except for the percussion cap and safety pin. As such it would be susceptible to moisture and likely caused many misfires.

The device consists of a tubular wooden body, wooden pressure plug, wooden cap, storm match, percussion cap and cardboard detonator. The body has a constriction in the lower half that is lined with friction compound. The pressure plug fits in the top of the body and is held in place by a shear pin. A storm match is mounted in the bottom centre in line with the hole in the body constriction. The cap fits over the top of the pressure plug and covers the end of the shear pin. The safety pin fits through holes in the cap and pressure plug, but on top of the main body. The detonator assembly is a cardboard cased detonator with a percussion cap mounted in the top.

Pressure on the cap forces down on the pressure plug until the shear pin breaks. The pressure plug continues its downward movement forcing the storm match through the hole and friction compound causing it to ignite. The flame produced causes the percussion cap to fire into the detonator setting it off and causing the mine or charge to detonate.

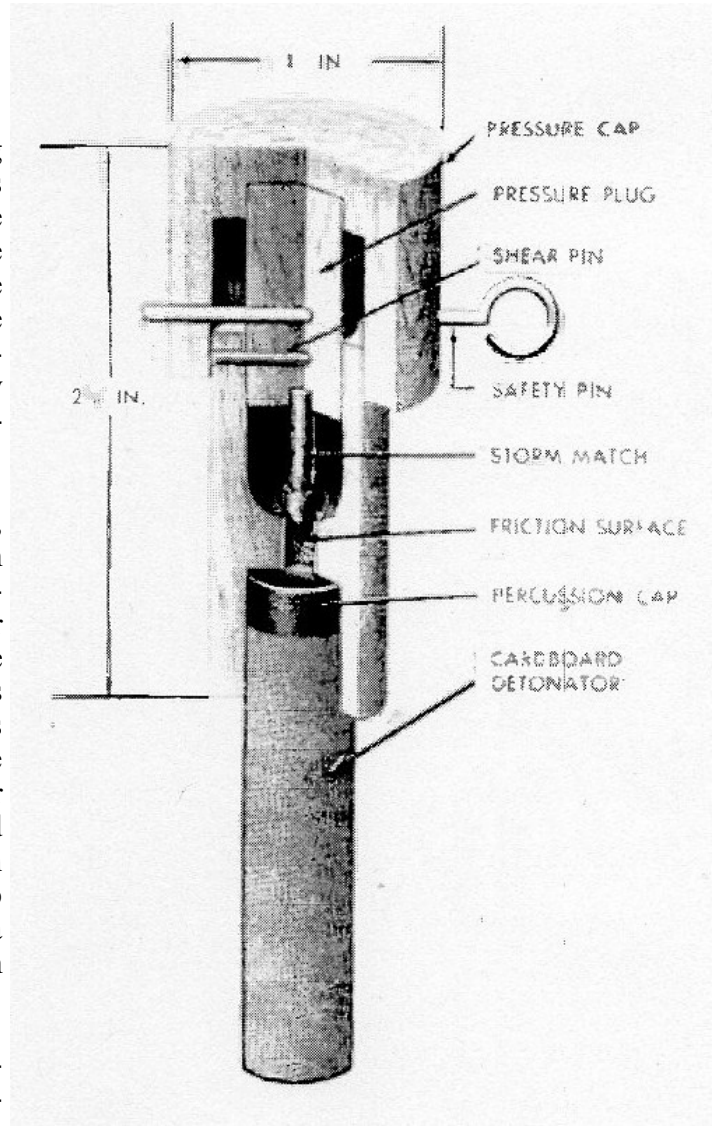

Wooden Pressure Fuze

Wood Capped Metallic Pressure Fuze (Designation unknown)

Type - Pressure


Length - 2.6 in. (68 mm)

Diameter - 1.0 in. (25 mm)

This appears to be a modification of the earlier Wooden Pressure firing device to increase reliability and moisture resistance. It is still susceptible to moisture in its use of a cardboard detonator. It was designed for use with non-metallic mines but could also be used in pressure activated boobytraps.

The main body is cylindrical and made of metal. It is threaded at the bottom end to screw into the fuze well of a mine. A spring-loaded striker is contained within the body and held in position by a shear pin. A plunger at the top is held in place by a shear pin. A safety pin also fits through the body and plunger preventing movement until the pin is removed. The bottom end of the plunger is hollow to fit the striker shaft. A spring retaining cap is attached to the bottom end of the plunger. The top of the fuze is covered by a wooden cap. The cardboard detonator assembly containing the detonator and percussion cap fits into the bottom of the fuze.

Pressure on the wooden cap pushes down on the plunger causing the shear pin to break allowing the plunger to continue its downward movement. The downward movement of the plunger compresses the spring until the spring retaining cap contacts the head of the striker. Continuing pressure causes the striker shear pin to break releasing the striker, which under pressure of the compressed spring drives down onto the percussion cap. When the percussion cap flashes into the detonator it fires and causes the main charge to detonate.

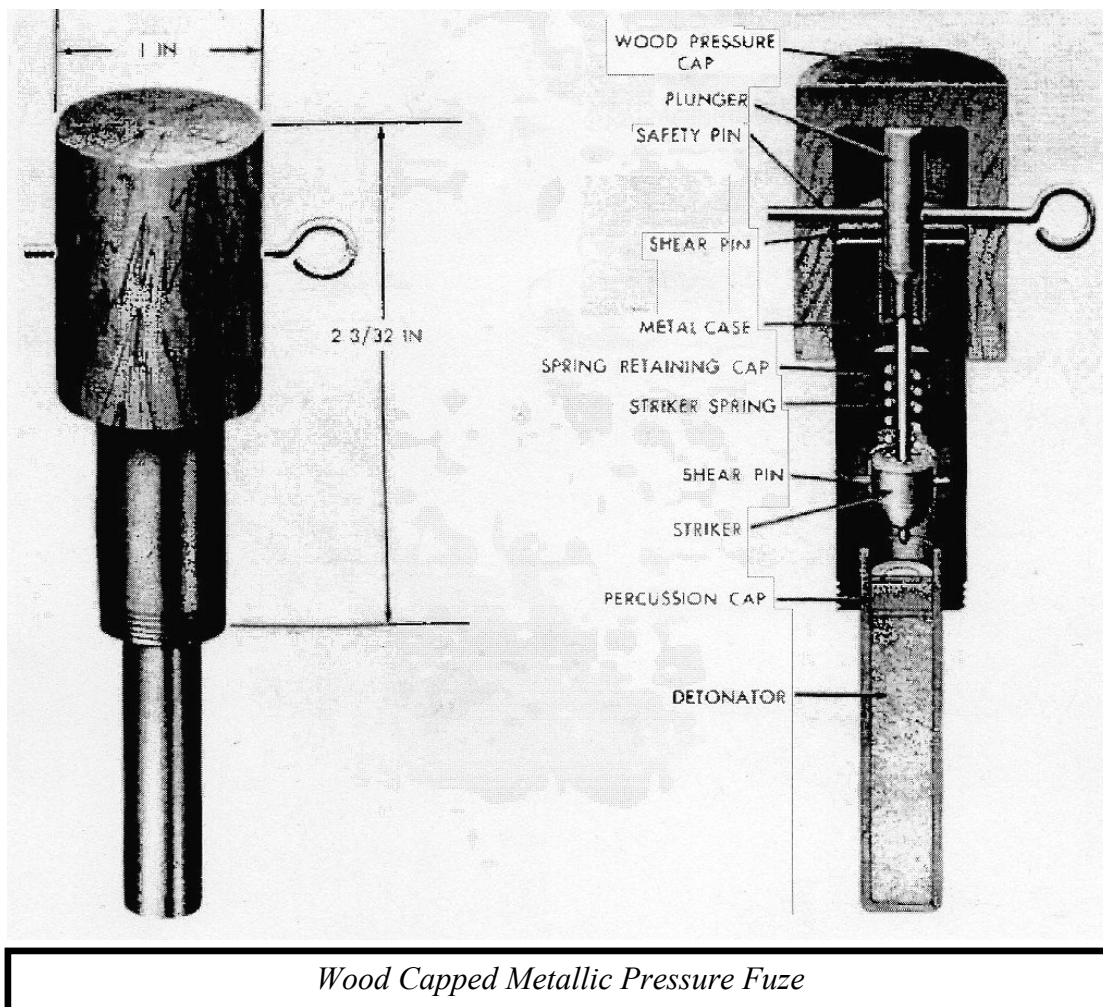

BKM-6 (БКМ-6)

Type – Concussion


Weight – 8.8 oz. (249 g) VZDA-16Ch

9.5 oz. (269 g) VZDP-16Ch

Length – 6.0 in. (153 mm)

Width – 2.6 in. (68 mm)

Height – 0.4 in. (10 mm)

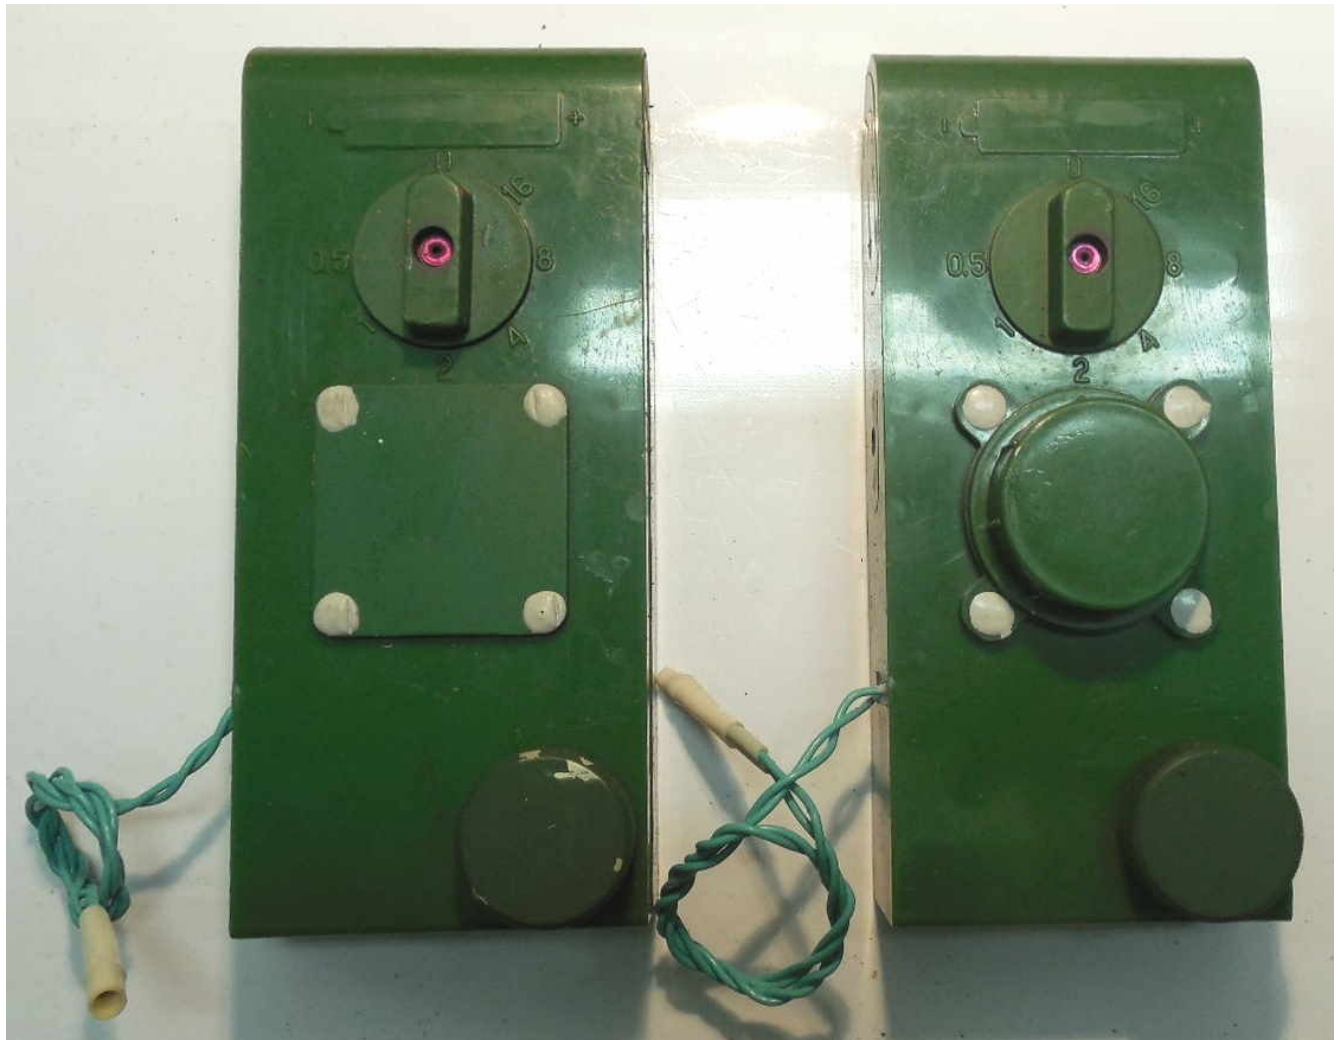

VZDA-16Ch Firing Device (left)


VZDP-16Ch Sensor (right)

The BKM-6 is an electronic firing device system consisting of a VZDA-16Ch firing device and up to five VZDP-16Ch shock wave initiators/sensors. This device is then capable of simultaneous initiation of multiple demolition charges that are within 50 metres, without any direct connectivity, such as wire or radio. Only a shock wave (i.e., concussion) is required to initiate the device. In principle it is similar to the VPZ-1 firing device, even though it is not employed underwater.

The complete BKM-6 system consists of one active base unit/firing device (VZDA-16Ch) that does not contain a shock wave sensor, and five passive units (VZDP-16Ch) that do contain shock wave sensors. The system requires a 7PIQ (12V) battery. Each element of the firing device has a 30-minute to 16-hour delay detonation time, and an LED that flashes for part of the 15-minute arming delay

period. The firing device also incorporates a self-destruct that functions in the event of battery discharge, or if any attempt is made to remove the battery. The BKM-6 system is supplied with six MD-5M detonators.

Further technical and operational details of the BKM-6 are unknown.

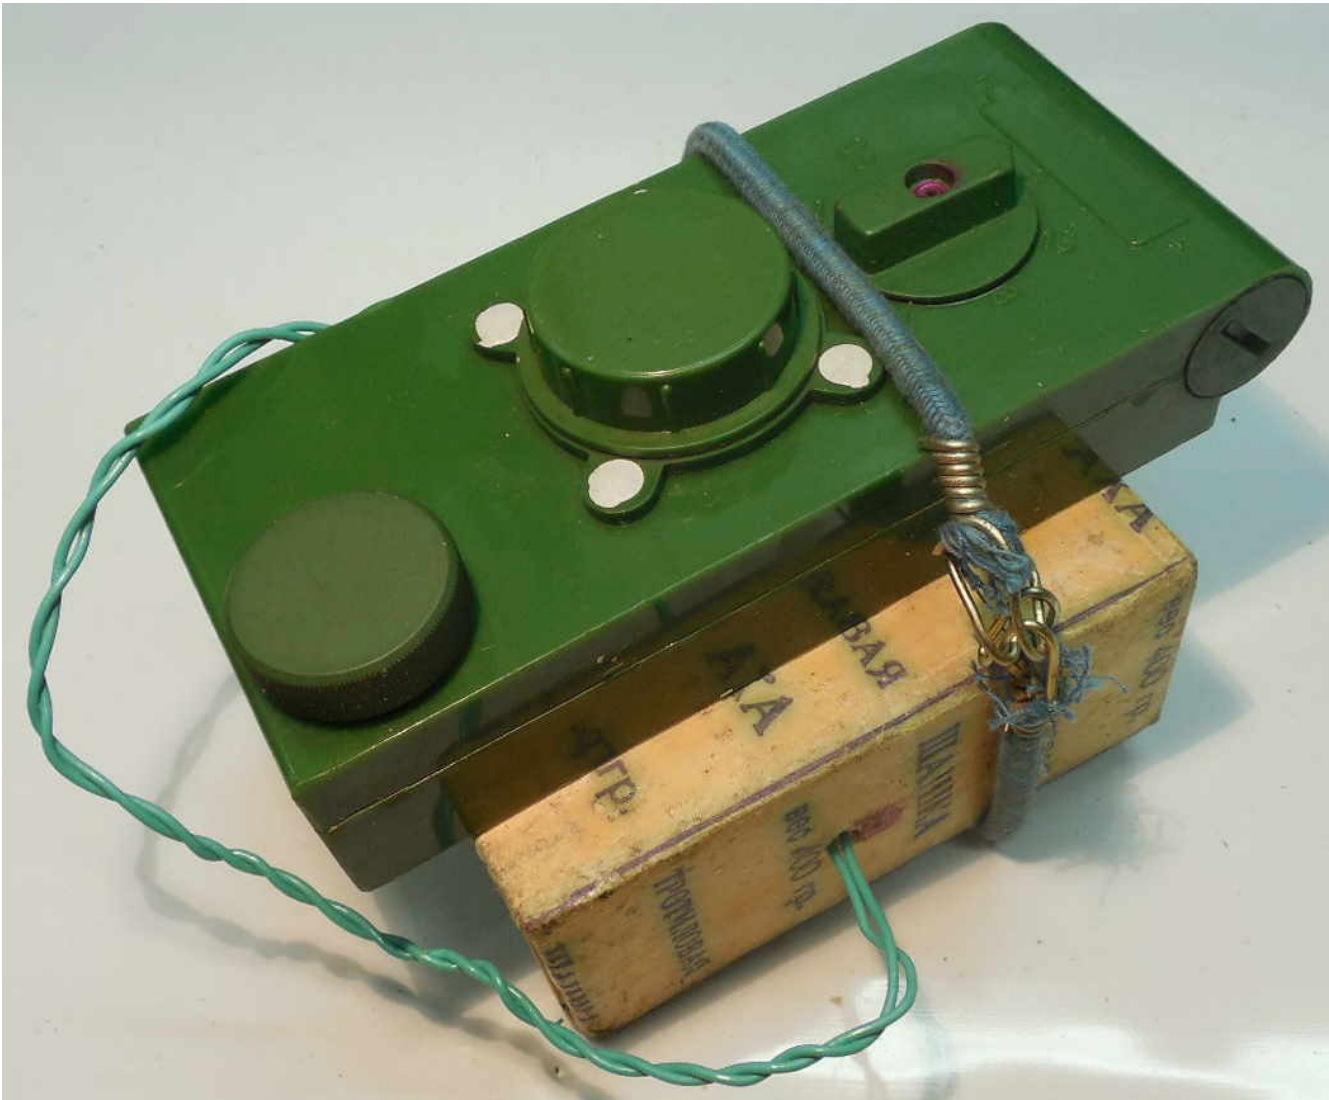

VZDP-16Ch Sensor with attached demolition charge

ChMV-10 (ЧМВ-10)

Type - Delay

Diameter - 2.1 in. (54 mm)

Height - 4.2 in. (108 mm)

The ChMV-10 firing device was first developed during WWII. It was also used by North Vietnamese and Viet Cong sappers in attacks on US ammunition storage facilities during the Vietnam conflict. It can be used to fire a percussion detonator or to close an electrical circuit. The device provides a delay of up to 10 days.

When first developed the outer casing was made of cardboard and measured 3.8 inches (98 mm) high and two inches (51 mm) in diameter. Post war devices have the outer casing made of Bakelite and are slightly larger. The top lid is threaded into the lower portion of the casing. The bottom of the stem has a threaded hole to fit an MD-2 detonator assembly or an electrical contact cap with leads. The joint is waterproofed by a rubber washer.

The clockwork mechanism is contained in the upper section of the mechanism. The spring-loaded striker is contained in the lower stem. There is a knurled disc on the top used to wind the clock mechanism. The side of the clockwork mechanism has a window through which the time settings are viewed. The numerals on the dial indicate days with the divisions between numerals indicating 2-hour increments. The striker is held in the cocked position by a tension hook.



ChMV-10 Firing Device with cap removed



*ChMV-10 internal parts
Photo- G. Zahaczewsky*

To set the mechanism, remove the lid and using the knurled disc wind the clock mechanism until the desired time setting is lined up with the indicator mark on the window. When released the mechanism starts. Replace the lid to complete the arming. The device should not be set for less than six hours as it is unreliable up to that point. The device can be set for any period from six hours to ten days.

When the device counts down to the set delay a striker release lever trips the tension hook and releases the striker. The striker is driven down under pressure from the striker spring. The point of the striker hits the percussion cap in the MD-2 detonator assembly and fires the device. If set for electrical firing, the point of the striker completes the electrical circuit.

ChMV-16 (ЧМВ-16)

Type - Delay

Weight - 17.6 oz. (500 g)


Diameter - 1.9 in. (50 mm)

Height - 4.5 in. (115 mm)

The ChMV-16 is virtually identical to the ChMV-10 in form and function except it can be set for delays from six hours to 16 days.



ChMV-16 Firing Device

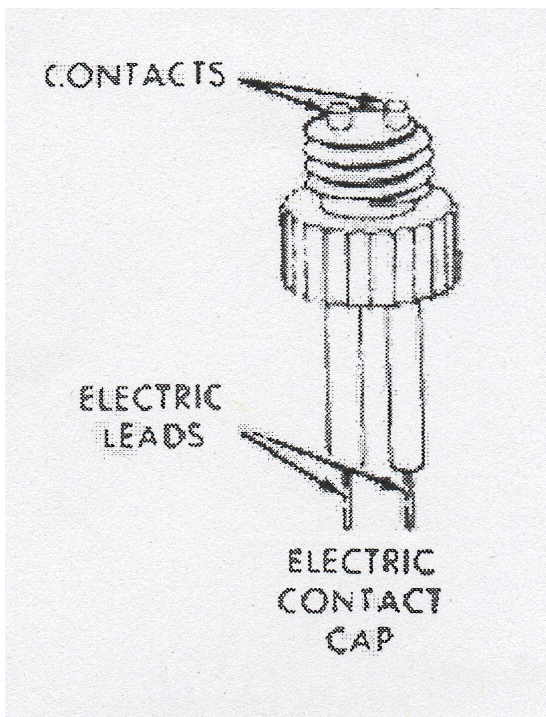

Electrical base used with ChMV devices

ChMV-60 (ЧМВ-60)

Type - Delay

Weight - 2.8 lb. (1.3 kg)

Diameter - 4.5 in. (115 mm)

Height - 4.5 in. (115 mm)

This firing device was developed in WWII. It is a mechanical clockwork delay mechanism that can be set for a delay from 2 to 60 days. Accuracy when set for 2-10 days is plus or minus 9 hours, when set for 10-60 days accuracy is plus or minus 18 hours. The device is meant to detonate large explosive charges.

The ChMV-60 consists of a casing, clockwork mechanism, lid, clamp and MD-2 or MD-5M detonator assembly.

The main casing is cylindrical and has two anchor lugs attached to the side of the casing opposite each other. The bottom of the casing has an adapter to accept the detonator assembly and a hole closed by a screw plug to allow winding of the clockwork. The lid fits

over the top of the casing to close and waterproof it. The clamp is "U" shaped and has a threaded key in the centre that is used to tighten the lid. The key is a combination of tightening screw and is also used to cock the striker and wind the mechanism. The top of the key has a square socket for winding the device and the other has a depression to catch the point of the striker.


The clockwork mechanism has a dial on top calibrated from 0 to 60. Two arrows on the top point counterclockwise to indicate the direction of movement to set the delay. Two holes located between the 0 and 60 markings allow a view to see that the striker is cocked and the other allows a trigger pin to protrude. The trigger pin is attached to a trigger lever below the dial. The trigger lever is hinged at the end opposite the trigger pin. A "U" shaped cutout on the lever is designed to engage in a slot on the striker. The striker is spring loaded under the trigger lever. An indicator is mounted centrally and on top of the dial. There are two knurled knobs on the indicator.

The unit is stored with the clockwork unwound and the striker uncocked. It is shipped in a wooden container closed by retractable lids. The container is divided into two compartments divided by a partition. The partition has holes to allow the detonator assembly to protrude into the bottom compartment and one to allow the winding hole cover to fit into it so that the device sits flat on the partition. The bottom portion is designed to fit two 400-gram and one 200-gram explosive cartridges.

To set the device, it is removed from the container and the lid removed. Turn the indicator clockwise (against the direction of the arrows) until the arrow is pointed at the "0". Then using the key, wind the clockwork mechanism until it stops without forcing it. Replace the cover on the hole. Using the knobs on the indicator, turn the indicator counterclockwise (in the direction of the arrows) until the desired delay is indicated by the arrow on the indicator. Unscrew the cover on the adapter and using the key push the striker up into the device and ensure the trigger lever engages in the slot on the striker. Ensure the proper delay is set and make sure the clockwork mechanism is working. Close the



ChMV 60 Firing Device

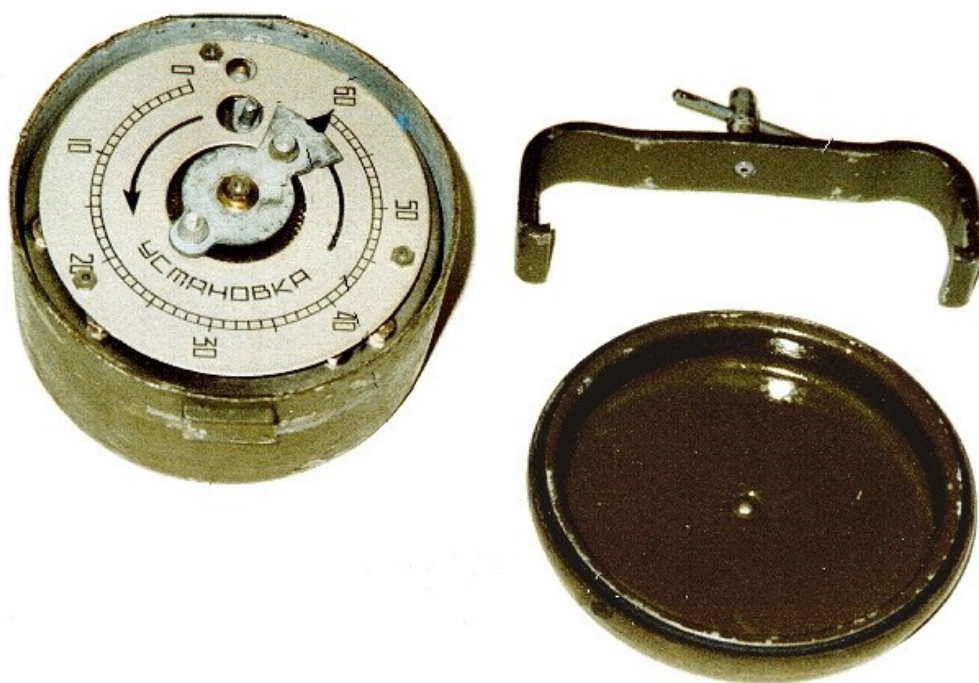


casing by putting the cover on, and engaging the clamp with the ends of the clamp under the lugs on the side of the case. Screw the key down until the lid is tight. Screw the detonator assembly into the adapter and insert the device back into its wooden case with the detonator protruding into the explosive chamber. The one kg. integral charge in the box is meant to be an initiator for a larger charge which should be packed around the case.

ChMV-60 with cover removed

As the device counts

down the indicator moves with the countdown. When approaching zero, the edge of the indicator contacts the trigger pin. As the countdown continues it gradually pushes the trigger lever out until it disengages the striker at the point it reaches zero. The striker under pressure from the striker spring is driven down to hit the primer in the detonator assembly causing it to fire.

The fuze can be disarmed if there are at least two days left on the delay.

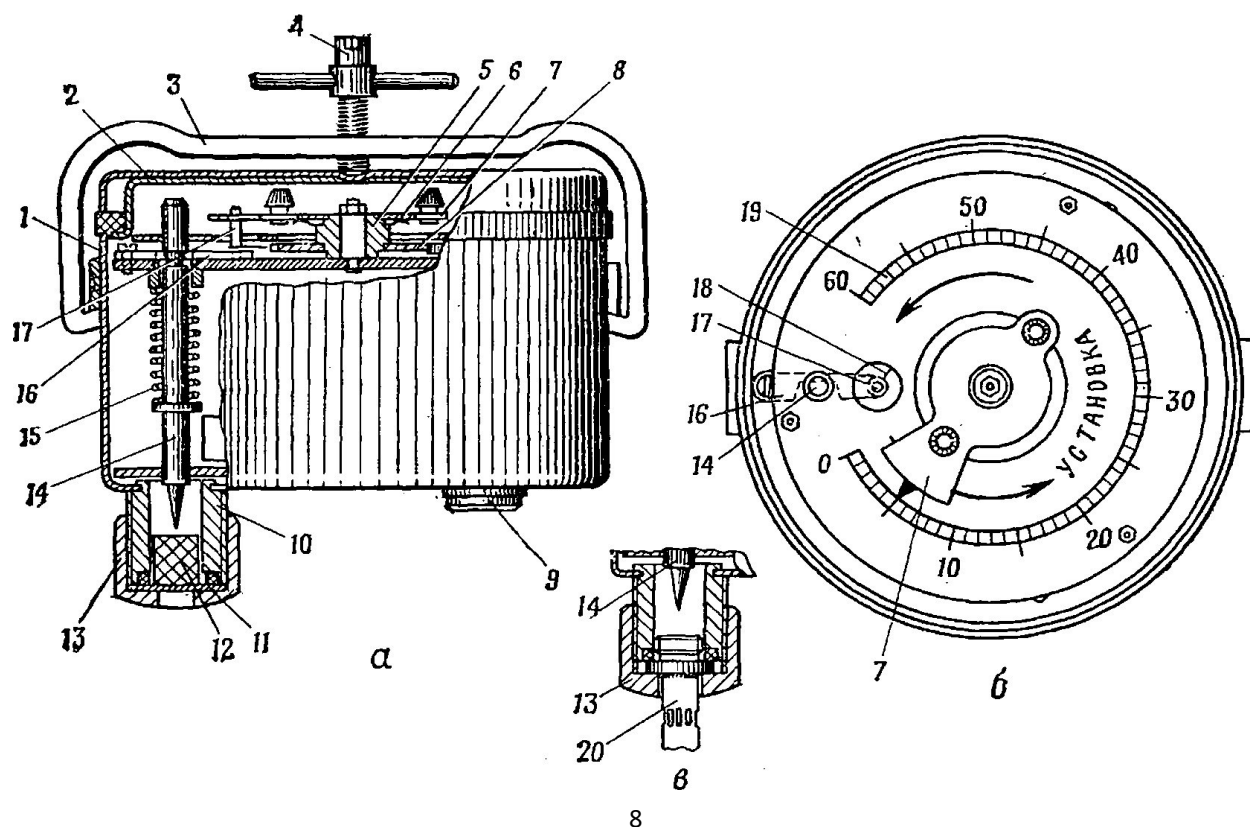

ChMV-120 (ЧМВ-120)

Type - Delay

Weight - 3.7 lb. (1.7 kg)

Diameter - 3.9 in. (100 mm)

Height - 5.1 in. (132 mm)


This is a mechanical time delay device that can be set for delay periods from 1 to 120 days in 6-hour increments. It should be noted that a range of accuracy must be taken into consideration. When set for 1-20 days, its accuracy is plus or minus 10 hours, when set for 20-120 days its accuracy is plus or minus 26 hours. It is normally installed in a wooden case, but it may also be used without that case to prime individual demolition charges.

The device consists of a housing with cover, bracket, and combination screw, clockwork

mechanism, manual and remote start mechanism, striker mechanism, detonator and wooden case. The housing is metal with an open top that is closed by a cover. The bracket that holds the cover on fits over the cover and attaches to lugs on the side of the housing. The combination screw is used to tighten the bracket and is also used as a tool to wind the clockwork mechanism and to open and close the plugs on the bottom of the housing. The housing has a threaded opening on the bottom used to wind the clockwork mechanism and is closed by a plug. Near the edge of the housing is a stem to fit the MD-5M detonator that is also closed by a plug. There are two wires connected to the housing used for the remote start mechanism.



ChMV-120 Firing Device

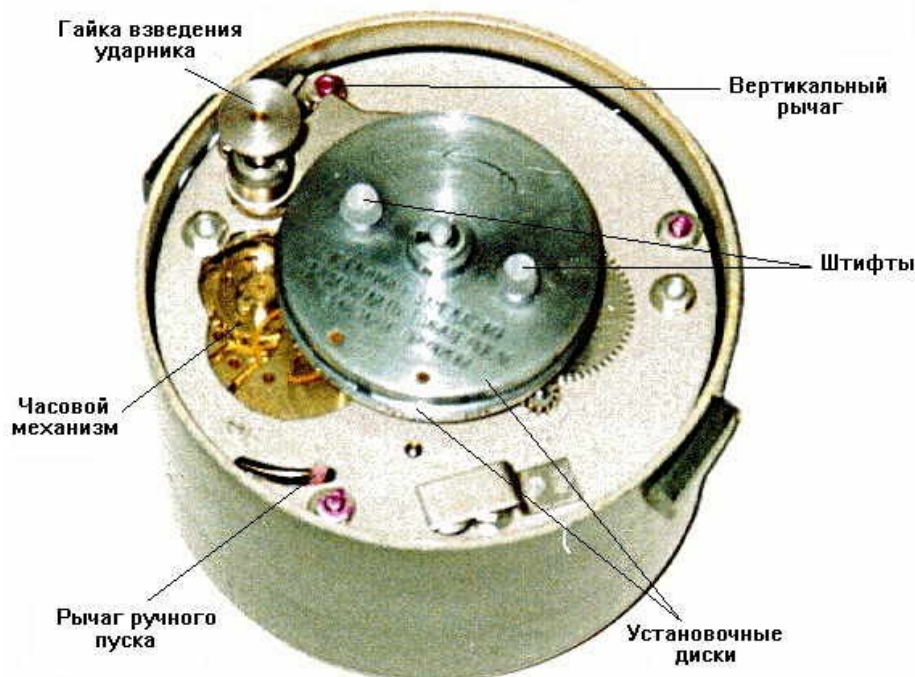

ChMV-120 with cover removed

The clockwork mechanism has two discs on top used to set the time delay. The top disc is divided into 10 large divisions each corresponding with one day delay. Each of those divisions is further divided into 4 smaller divisions corresponding with 6-hour delays. An arrow on the upper surface of the disc indicates the direction of rotation to set the delay. The lower disc is divided into 12 divisions each corresponding to 10 days. Off to one side of the discs is the striker mechanism with a knob on top to allow the user to get a grip on it. About a quarter

way round the discs from the striker is a lever in a slot. This is the manual start lever. Markings on either end of the slot mean Start/Stop (in Cyrillic). The manual start mechanism is used by simply moving the lever from “stop” to “start”. The remote start mechanism is a thermal relay that will start the clock after it is attached to a power source of 12-18 volts for one minute. The detonator is a standard MD-5M detonator assembly. The wooden case that comes with the fuze has two compartments closed by retractable lids. The large upper compartment contains the ChMV-120 fuze. The smaller lower compartment holds a 1 kg charge (two 400 g and one 200 g blocks). There are two holes in the lid of the small compartment, one to fit the detonator and one for the other plug on the bottom of the fuze. One corner of the lid is cut off for the wires of the remote start and a saw cut in the corner of the box closest to the cut off lid to let the wires out of the case.



The target of the delayed demolition has a large explosive charge buried or concealed beside it. The device in its case acts as the detonator for the larger charge. The case is filled with its explosive charge and the device is opened to prepare it. The combination screw is used to remove the plug covering the winding mechanism. The upper end of the screw, which has a socket to fit the winding shaft, is used to wind the clockwork

ChMV-120 showing cover and bracket, note the combination tool closing screw

mechanism. It takes 35-40 full revolutions to completely wind the mechanism. Once wound the striker is cocked by pulling up on the knob on the striker. Rotate the discs to set the desired time delay, do not set for a period of less than one day. Move the lever to the start position and ensure the clockwork is operating, if a remote start is planned move the lever back to stop. Close the cover and install the bracket and screw. Unscrew the plug from the detonator stem, remove the gasket and put it on the detonator assembly. Screw the detonator assembly in and tighten it. Place the device in the case with the detonator protruding into the charge in the lower compartment. Close the case, if a remote start is being used ensure the wires protrude from the case. Install the case in the larger charge and conceal both. For a remote start, run wires from the case to the start site, ensuring the splices are waterproofed and the circuit is serviceable. The delay period starts when the manual lever is placed in the Start position or when the remote start is attached to a suitable power supply.

The device may be disarmed if there is a proper amount of time remaining before it is supposed to detonate. If set for a period of less than 20 days, two days must remain. If set for a period of 21 to 120 days, five days must remain.

ChVZ (4B3)

Type - Vibration

Diameter - 4.7 in. (120 mm)

Height - 2.2 in. (57 mm)

Designed in WWII for use with the DM highway mine this firing device was versatile enough to detonate any charge especially when emplaced on bridges or in terrain where passing vehicles cause vibration.


The ChVZ consists of a casing, 4-volt battery, safety clockwork mechanism, horizontal vibration contact, vertical vibration contact and two sets of leads. The

body is a cylindrical sheet metal casing with a cap and a hole through the cap. The battery is a 4-volt flashlight battery located on top of the mechanism. The safety clockwork is located below the battery and has a set of long leads attached to it. The horizontal and vertical vibration contacts consist of copper spiral wound contacts contained within aluminum housings. Both are also located below the battery. The short set of leads are for attachment to the detonator. One of the leads is attached to the copper spiral contacts through the clockwork mechanism. The other is attached to the aluminum housings through the battery. The electrical circuit is interrupted at the clockwork and at the vibration contacts. Both sets of leads pass out of the casing through the hole in the cap. The hole has a rubber gasket to provide moisture resistance.


For use the short set of leads is attached to the detonator which is then inserted into the main explosive charge. Once the firing device is in place, the long set of leads is attached to a battery of

at least 16 volts for 5 to 10 seconds. The current melts a wire holding the cogwheel of the clockwork. Once the wire melts, the clockwork is free to run. After a delay of about 4 minutes the clockwork closes a switch completing the circuit except for the vibration contacts. The device is now armed.

When a vehicle or anything else creates sufficient vibration it causes the spiral contacts to vibrate within the aluminum housings until one of them touches the contact within the housing to close the electrical circuit causing the detonator to fire and detonate the main charge.

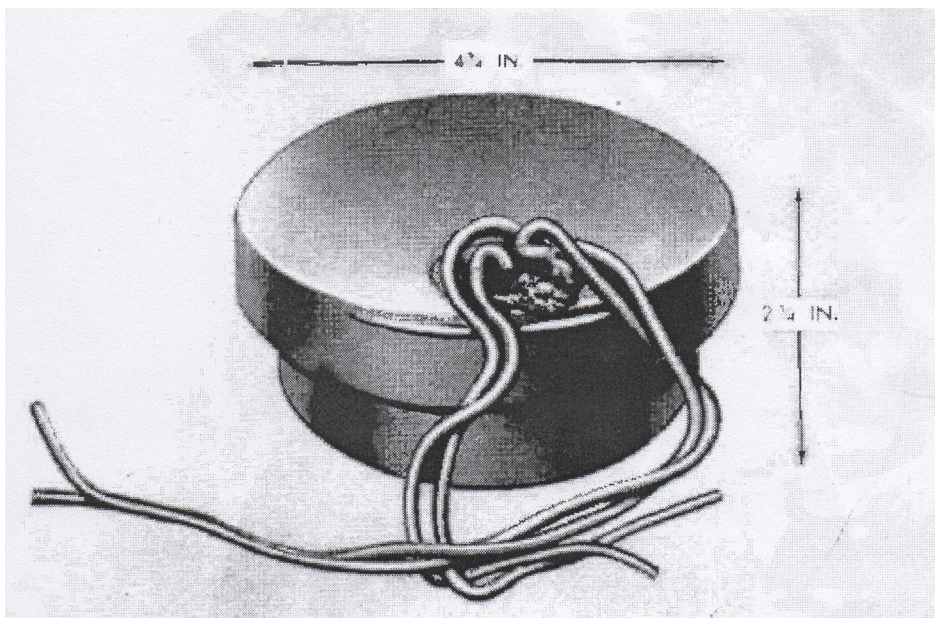

ChVZ Firing Device

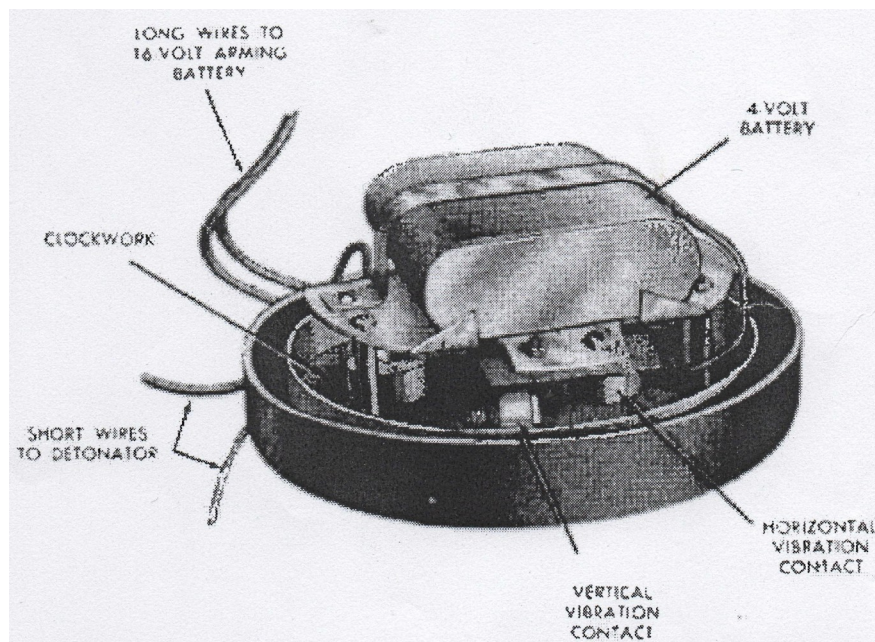

ChVZ showing internal construction

ChZ-10 (ЧЗ-10)

Type - Delay


Weight - 24 oz. (680 g)

Diameter - 5.0 in. (127 mm)

Height- 3.5 in. (90mm)

This is a mechanical clockwork delay mechanism designed to initiate an electrical circuit. It can be set for a delay of up to 10 days, with an accuracy over the delay period of 4 hours.

It consists of a casing, clockwork mechanism and set of electrical leads. The casing is steel with a lid hinged on one side and a knurled nut on the opposite side of the casing to lock the lid in the closed position. The lid has a rubber washer to waterproof it. Holes in the lower side of the casing allow the electrical leads to protrude. The electrical leads are waterproofed where they exit from the casing. The bottom of the casing has a winding stem with the winding key attached. The clockwork mechanism has a time disc and hand on top. Arrows on the dial indicate the direction in which the hand moves. The hand is used to indicate the delay time set. A knob in the centre of the dial is used to set the clockwork for the desired delay up to a maximum of 10 days. An inscription on the dial in Russian means "To set, use only knob on face of dial".

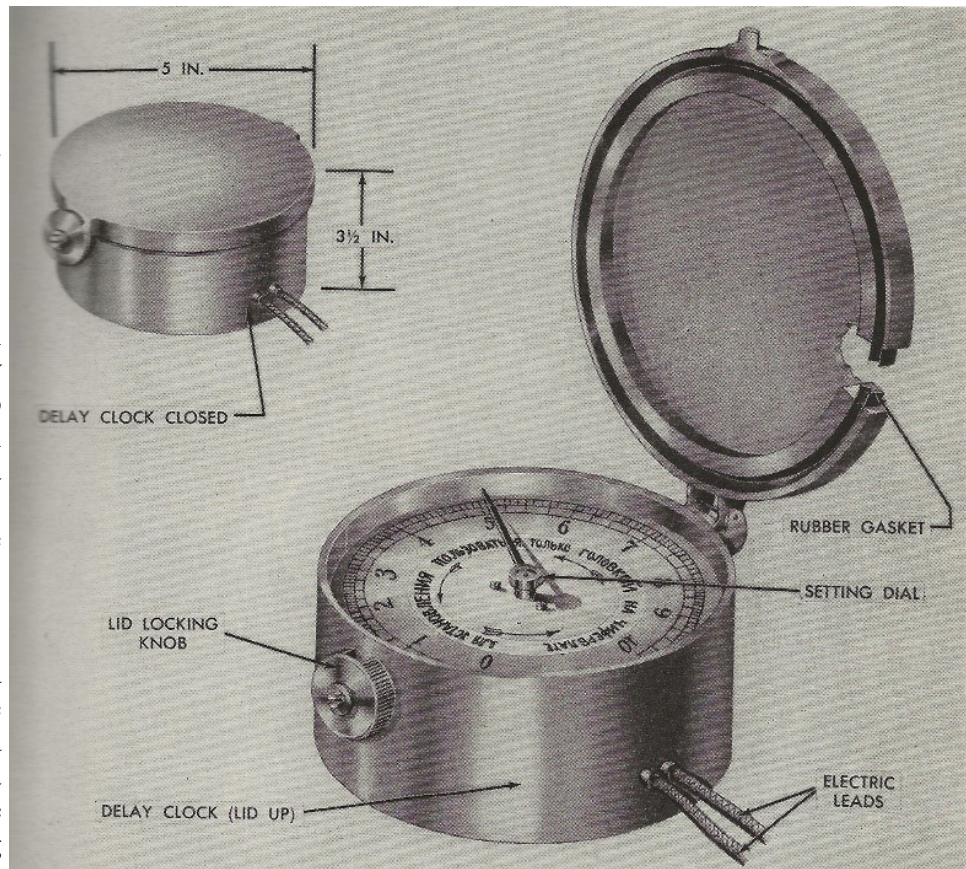

ChZ-10 Firing Device

Prior to use, test the device by attaching an ohmmeter to the leads. At a setting of zero the needle should move, at any other setting it should not. Once tested, wind the clockwork with the key provided. Set the dial for the desired delay, close and lock the casing. Then attach the leads into the electrical demolition circuit.

Once the delay has expired the release lever in the clockwork trips a spring-loaded striker which closes the electrical circuit between the leads and initiates the explosive charge.

ChZ-35 Cylindrical (ЧЗ-35)

Type - Delay


Weight - 7.5 lb. (3.4 kg)

Diameter - 7.5 in. (190 mm)

Height - 3.5 in (89 mm)

The ChZ-35 is a mechanical clockwork delay firing device designed to initiate an electrical circuit. It can be set for a delay of up to 35 days, accuracy over the delay period is 6 hours.

It consists of a cylindrical casing, clockwork mechanism and set of electrical leads. The cylindrical casing is steel with a lid hinged on one side and a knurled nut on the opposite side of the casing to lock the lid in the closed position. The lid has a rubber washer to waterproof it. The clockwork mechanism has a small time disc and hand on top. A knob in the centre of the dial is used to set the clockwork for the desired delay up to a maximum of 35 days. The hand indicates the delay time set. The winding post and winding key are located on top of the clockwork mechanism under the lid. Holes in the lower side of the casing below the knurled nut allow the electrical leads to protrude. The electrical leads are waterproofed where they exit from the casing.

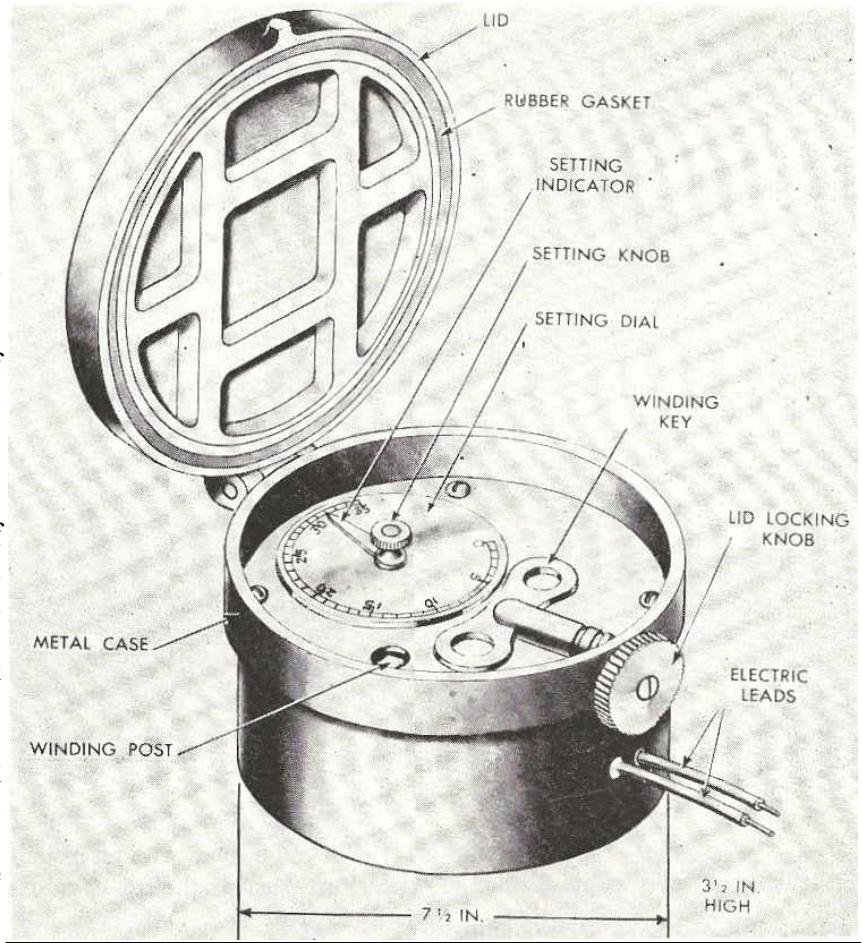

ChZ-35 Cylindrical Firing Device

Prior to use, test the device by attaching an ohmmeter to the leads. At a setting of zero the needle should move, at any other setting it should not. Once tested, wind the clockwork with the key provided. Set the dial for the desired delay, close and lock the casing. Then attach the leads into the electrical demolition circuit.

Once the delay has expired the release lever in the clockwork trips a spring-loaded striker which closes the electrical circuit between the leads and initiates the explosive charge.

ChZ-35 Rectangular (43-35)

Type - Delay

Weight - 4.5 lb. (2.0 kg)

Length - 6.5 in. (165 mm)

Width - 3.5 in. (89 mm)

Height - 3.5 in. (89mm)


This is a mechanical clockwork delay mechanism designed to initiate an electrical circuit. It can be set for a delay of up to 35 days, accuracy over the delay period is 6 hours.

The ChZ-35 consists of a rectangular casing, clockwork mechanism and set of electrical leads. The casing is sheet metal with a separate lid. The lower casing has four tabs which are folded over the lid to lock it in the closed position.

The clockwork mechanism has a small disc and hand on top. An arrow on the disc indicates the direction to turn the hand to set the delay. A knob in the centre of the dial is used to set the clockwork for the desired delay up to a maximum of 35 days. The hand indicates the delay time set. The winding post and winding key are located on top of the clockwork mechanism under the lid. Holes in the end of the casing allow the electrical leads to protrude. The electrical leads are waterproofed where they exit from the casing.

Prior to use, test the device by attaching an ohmmeter to the leads. At a setting of zero the needle should move, at any other setting it should not. Once tested, wind the clockwork with the key provided. Set the dial for the desired delay, close and lock the casing. Then attach the leads into the electrical demolition circuit.

Once the delay has expired the release lever in the clockwork trips a spring-loaded striker which closes the electrical circuit between the leads and initiates the explosive charge.

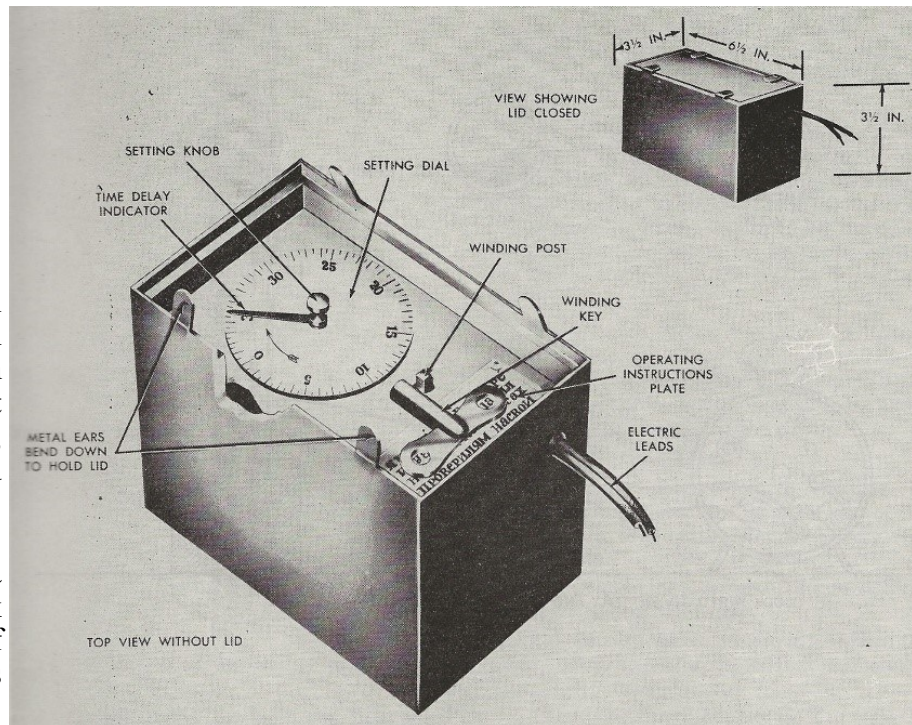

ChZ-35 Rectangular Firing Device

ChZ-B (ЧЗ-Б)

Type - Delay

During the 1940s and 1950s, the Russians employed commercial alarm clocks as mechanical delay initiators for boobytraps and demolition charges. They designated these as ChZ-B firing devices, although there does not appear to have been any attempt to standardize the actual timing device. Today, many would consider this as an improvised explosive device. However, almost 80 years ago, the Russians officially designated it.

The firing devices utilized commercial alarm clocks fitted with a knife switch attached to the alarm mechanism on the back of the clock. A housing containing two contact arms, insulated from each other, was attached to the back of the clock. Two terminals, each wired to one of the contact arms, projected from the housing and were used to wire the clock into a firing circuit which included an external battery and electric detonator.

The ChZ-B could be used as a stand-alone device in an electrical firing circuit, or it could also be used as an arming delay in an instantaneous detonation circuit. Only imagination limited its use.

EKhP (ЭХП)


Type - Delay

Length - 2.0 in. (50 mm)

Diameter - 0.5 in. (15 mm)


This is not really a boobytrap mechanism but could be adapted as a short delay boobytrap. It functions on an electrical-chemical delay principal and is mainly used as a delay element in detonation circuits to increase safety. Its delay period is between

10 minutes and 4 hours depending on temperature. At higher temperatures the delay time is short, as the temperature lowers the delay increases. There is a larger sized version measuring five inches (127mm) long and 1.3 inches (35 mm) in diameter. In all other respects it is identical.

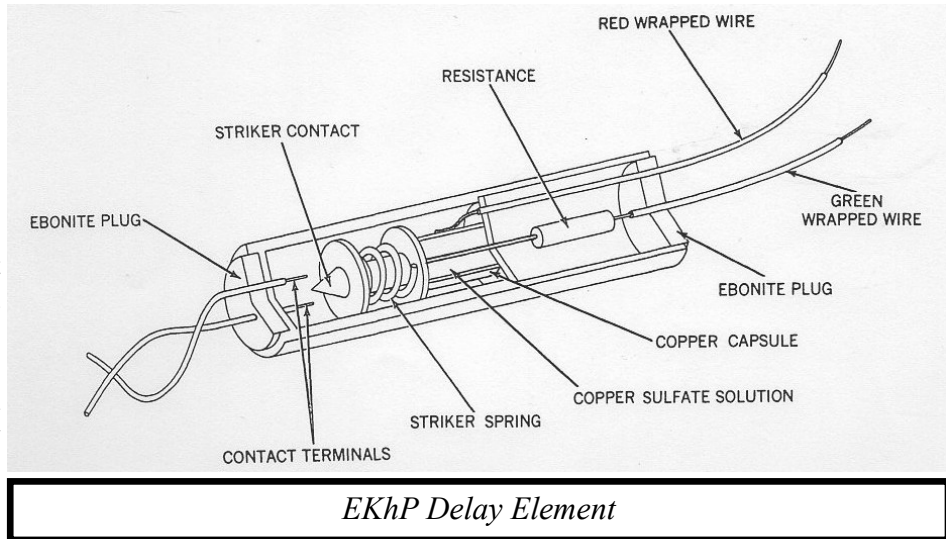

The device consists of a casing, spring loaded contact, copper capsule, copper sulfate, resistor and two pairs of electrical leads. The casing is made of tar impregnated cardboard with Ebonite plugs in the ends. The body is divided into two chambers. Contained within the larger forward chamber is the spring-loaded contact attached to a copper capsule containing a copper sulfate solution. The rear chamber contains the resistor. A set of electrical leads, one green and one red, passes through the rear Ebonite plug. The green lead is attached to the resistor and the red to the copper capsule. A restraining wire from the resistor passes through the copper capsule holding the spring-loaded contact in the cocked position. The forward end plug also has a set of leads protruding into the device but do not contact anything that will conduct a current. These leads are for attachment to an electric detonator. An external battery is attached to the leads that come out the back end of the device.

When the battery is connected the current flowing through the wires causes electrolysis to begin. After a period of time, the copper sulphate solution degrades the restraining wire until it breaks and releases the contact. The contact moves forward and closes the circuit at the forward plug. Once the circuit is complete the electric detonator will fire.

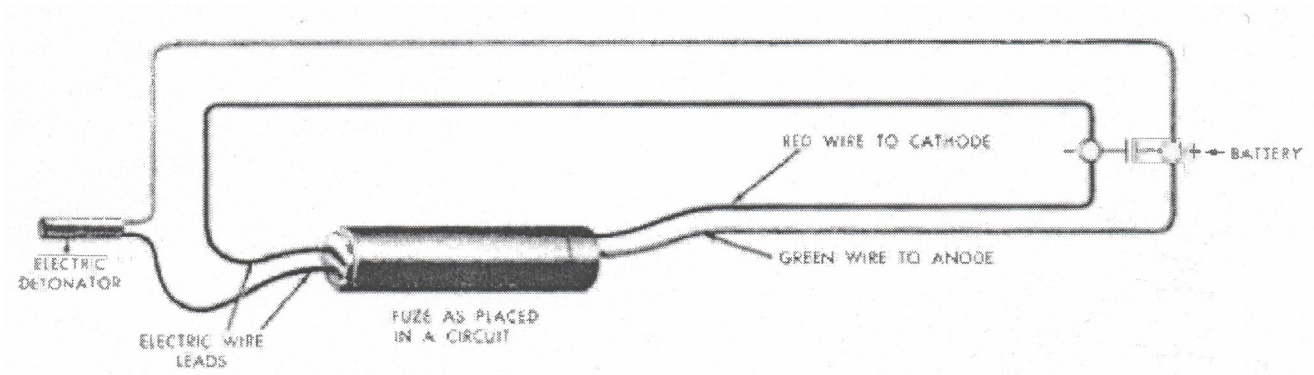

EKhV (ЭХВ)

Type - Delay

Weight - 4.6 oz. (133g) without battery

Length - 6.5 in. (156 mm)

Diameter - 2.5 in. (75 mm)

This firing device was introduced for service in 1941. It externally resembles the ChMV-10 and ChMV-16 clockwork fuzes. It is used for delayed detonation of mines and charges with the objective to delay, disrupt and harass enemy troops. It will provide delay periods between 12 hours and 120 days and is effective in a temperature range of -4 to +140 F.

The body of the device is Bakelite and has a screw cap on top. The bottom is internally threaded to accept the detonator assembly or an electrical contact adapter. The body contains a striker assembly, battery and arming terminal plate. The striker assembly, located at the bottom consists of a striker,




striker
spring,
copper

capsule, copper retaining wire and copper sulfate solution. The striker is located below the copper capsule containing the copper sulfate solution. The striker spring surrounds the striker and is held in compression by the copper retaining wire. The wire runs through the copper capsule but is insulated from it. The battery is a 1.4 -volt dry cell located above the striker assembly. The arming terminal plate rests inside the top cover and has two arming terminals to hold the resistance coil. The resistance coil has two numbers on one end indicating the

EKhV with MD-5M detonator
Photo- G. Zahaczewsky

EKhV with Electrical Contact Adapter

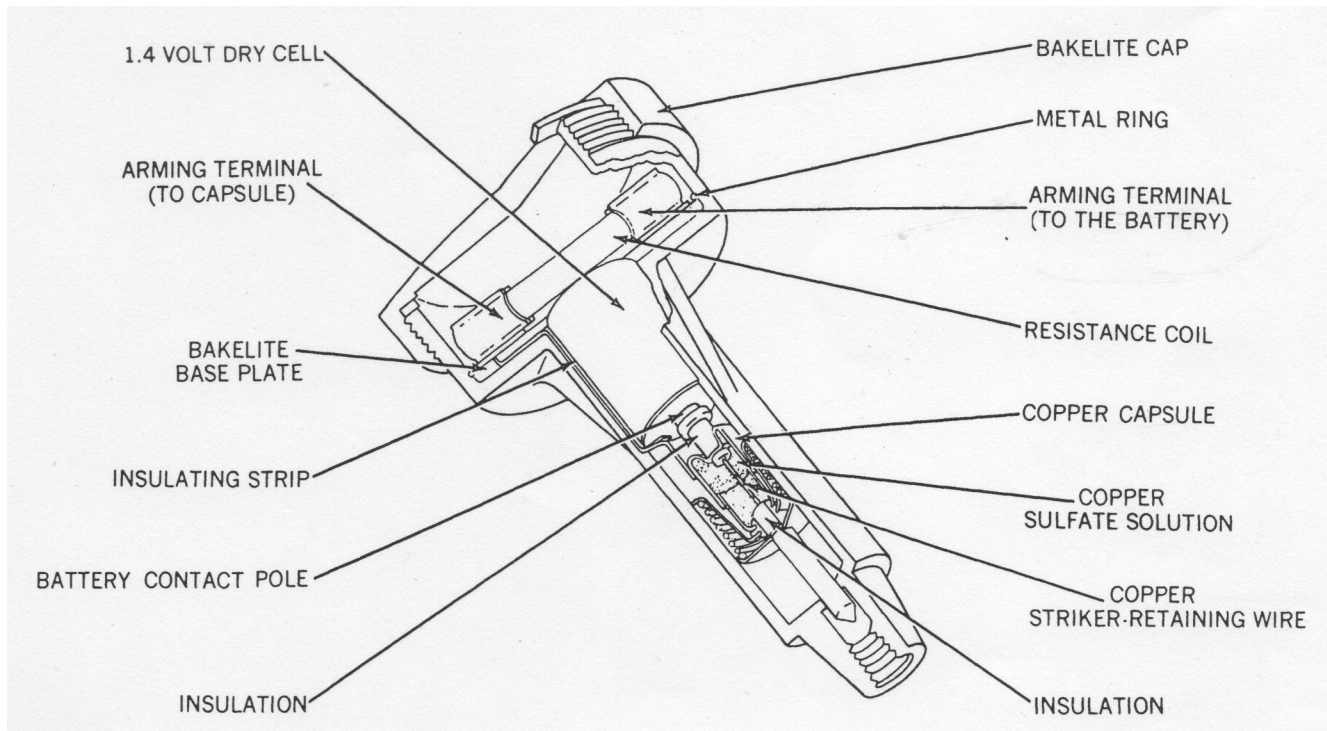

delay period. The upper number indicates days and the lower number hours. Each fuze is supplied with 8 resistance coils with differing delay times from 12 hours to 120 days. The copper capsule is wired to one of the arming terminals. The other arming terminal is wired to the battery and the retaining wire.

In this firing device, the copper capsule acts as an anode, the retaining wire as a cathode and the copper sulfate solution as an electrolyte. When current is applied electrolysis begins and corrodes the retaining wire until it finally breaks and releases the striker. The resistance coil determines the amount of current applied which governs the time delay.

For use, screw in either the detonator assembly (MD-2 or MD-5M) or the electrical contact adapter. Insert the fuze in the charge or wire it to the charge. Remove the top cap and ensure the battery is giving a minimum of 1.25 volts. Insert the resistance coil into the arming terminals. This starts the delay. Once the delay expires the wire will break and release the striker. The striker under pressure of the striker spring will be driven down into the percussion cap causing it to fire the detonator, or will close the circuit if using the electrical contact adapter. The maximum life of the device is about six months, limited by the life of the battery.

EKhV-5 (ЭXB-5)

Type - Delay

This device entered service in 1944. The EKhV-5 differs from the EKhV firing device in that it has a modified body style and a replaceable power source.

To change out the power source, unscrew the cover, remove the locking ring from the grooves and remove the retarding and impact panel from the case. Take out the existing power supply, replace it with a new one and reassemble in reverse order. The shelf and operational life of the EKhV-5 firing device is 12 months.



EKhV-5 Firing Devices

Further technical and operational details for the EKhV-5 are unknown at this time.

EKhV-7 (ЭXB-7)

Type - Delay

Weight - 7.8 oz. (222 g)

Length - 8.6 in. (220 mm)

Diameter - 1.6 in. (42 mm)

The EKhV-7 is a complex electro-chemical, time-delay (two to 120 days) firing device that entered Russian service in the 1970's. It is primarily intended for use as a boobytrap, or sabotage, device. It normally employs either an MD-2 or MD-5M detonator. It can also be fitted with an adapter that is intended to close, an electrical circuit. The body and some internal components are constructed of Bakelite, other internal parts are steel and rubber. There are reports that this device was employed in Afghanistan.

The device consists of a cylindrical body that contains an ECZ cocked striker assembly, one of ten time-varying resistance coils, a 1.5-volt dry cell battery (KB-U-1,5) as a power supply, and an arming mechanism in the top cover. The base of the body is internally threaded to accept either an MD-2, or MD-5M detonator, or an electrical circuit contact plug.

To place the EKhV-7 into operation, unscrew the top cover and insert the ECZ cocked striker assembly. The assembly contains a cocked firing pin that is restrained by a wire that will eventually be eaten away by galvanic action. Next, select and insert the appropriate resistance coil for the desired time delay. Ten discs are normally included with each device, with delays of two to 120 days, with an error factor of -25% to +75%. Following this, insert the battery power supply. Finally, screw the top cover back onto the body. The firing device is now ready for use.



EKhV-7 Firing Device

Upon withdrawal of the arming pin in the top cover, a circuit is completed with the power supply. The electrical current generated by the battery is passed through to the resistance coil. Once the appropriately selected resistance is overcome, the current initiates the galvanic action in the ECZ that will corrode the wire restraining the firing pin. When this occurs, the striker either impacts the primer of the detonator assembly or closes the electrical circuit in the contact plug.

The firing device will self-neutralize in approximately six months upon the battery life expiration.



*Sectioned EKhV-7
Photo- CAT-UXO*



EKhV-7 Firing Device showing internals and a full set of time resistance coils. Note the electrical circuit contact plug.

Photo- Oleksandr Mariash


EKhZ (ЭХЗ)

Type - Pressure or Impact
Diameter - 1.3 in. (34 mm)
Height - 14 in. (354 mm)

This firing device was designed during WWII for use in oil drum mines, but could be adapted for use with other types of charges. Not really a boobytrap mechanism but more of a mine fuze.

The device consists of a lower brass tube, upper lead tube, glass ampoule, battery plates and a pair of electric leads. The lower brass tube is sealed at the bottom and closed at the top by a stopper with seep holes in it. It contains two battery plates, one zinc and one copper. The electric leads are attached one to either of the plates and protrude out of the bottom of the tube. The upper lead tube has "corrugations" near the bottom of the tube. The upper tube contains an ampoule of sulfuric acid. A mounting ring surrounds the fuze at the junction of brass and lead tubes.

Pressure of at least 20 pounds (9 kg) or an impact on the lead tube will crush it and break the glass ampoule allowing the acid to escape. It seeps down into the brass tube and acts as an electrolyte causing an electric charge to travel down the leads to an electrical detonator.

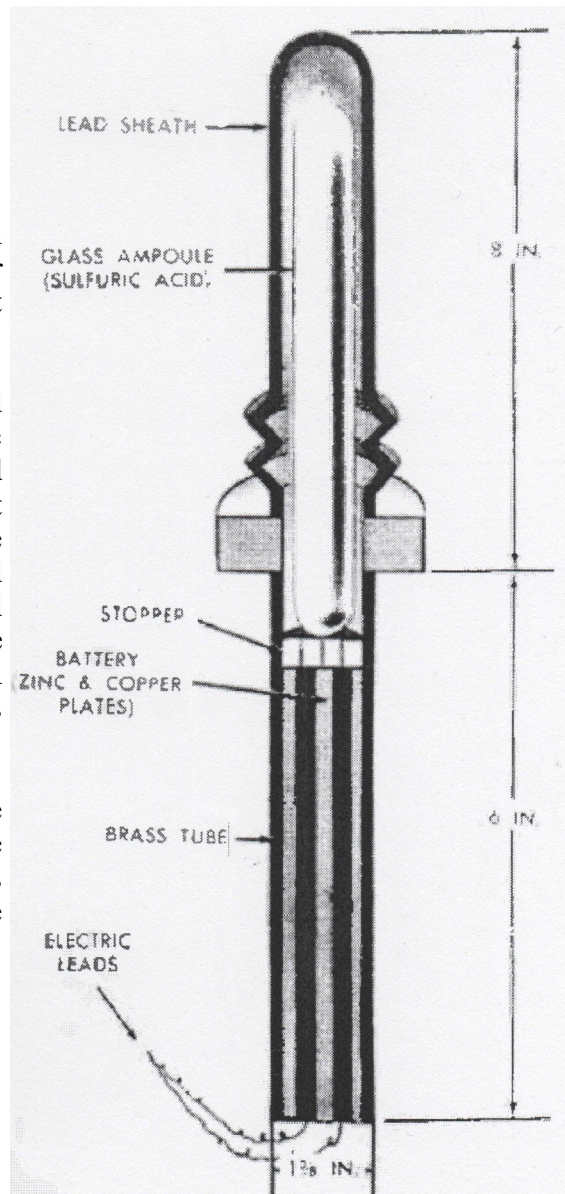

EKhZ Firing Device

EKhZ (ЭХЗ)


Type - Delay

Diameter - 1.0 in. (25 mm)

Height - 5.0 in. (127 mm)

Designed during WWII this fuze is now obsolete. It is an electrical device utilizing mercury as an activating medium.


The device consists of a body, base, fiber disc, rubber cylinder and electrical contacts. The upper body is cylindrical and made of nickel-plated steel with a threaded cap. The upper body has a chamber at the top. The fiber disc fits into the upper body about half way up and is held in position by the rubber cylinder in the bottom portion of the body. A small zinc wire is located in the centre of the fiber disc. The rubber cylinder protrudes slightly from the body. The body fits onto the Ebonite base with the protruding rubber cylinder fitting into the base and the outer body resting on the top of the base. There are two contact posts screwed into the bottom portion of the base with the ends protruding into the chamber in the base. The outer ends of the contacts protrude and are designed to have firing wires wound around

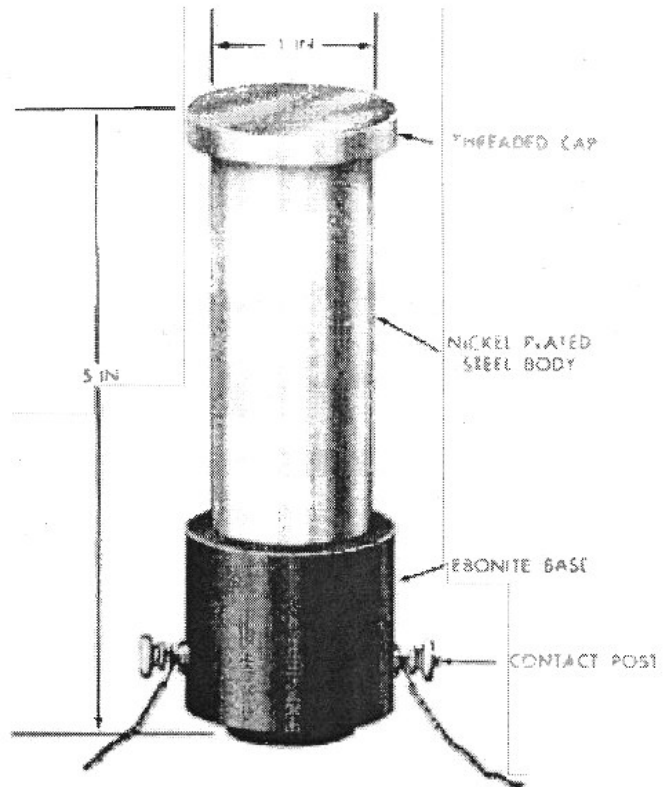

EKhZ Mercury Delay Firing Device

them without falling off.

When used, the device is wired into an electrical firing circuit. The cap is removed and mercury poured into the top chamber. The cap is then replaced. The mercury will corrode the zinc wire to open a seep hole in the fiber disc. Mercury will seep through the hole into the chamber in the base. When enough mercury has seeped through to fill the bottom of the chamber it will come in contact with both contact posts and complete the circuit.

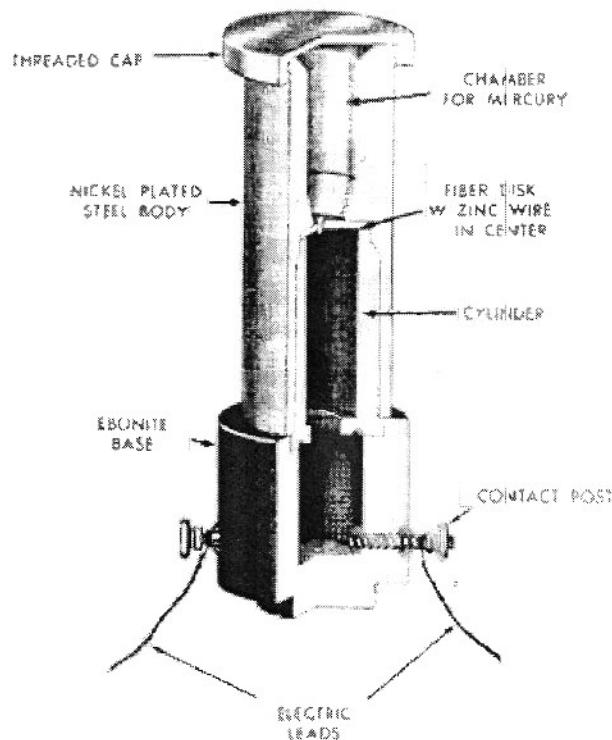

EKhZ Mercury Delay Internal diagram

EN (ЭН)

Type - Anti-withdrawal

Weight - 2.6 oz (75 g)

Length - 7.1 in. (182 mm)

Diameter - 1.2 in. (32 mm)

The EN firing device (sometimes designated as EN-6 or ENI) can be used with the BPM and UPM limpet mines, or the KZU-2 demolition charge. Its sole purpose is to provide those devices with an anti-defeat feature. Specifically, it will only detonate when an attempt is made to remove the firing device from the mine or charge.



EN firing device

The EN has a metal body and incorporates a metal-fatigue arming mechanism similar to the PMN mine. The arming delay is reported to be 14 minutes to four hours.

In operation, once an EN firing device is inserted into a mine, it engages a trigger mechanism. After the arming delay has expired, the firing pin in the EN rests on the trigger mechanism. If an attempt is made to remove the EN from the mine, the trigger mechanism releases the firing pin into the attached detonator (blasting cap).

F-10 (Φ-10)

Type - Command Detonation

Weight - 77 lb. (35 kg)

Length - 14 in. (355 mm)

Width - 7.0 in. (178 mm)

Height - 10 in. (254 mm)

The F-10 is a radio-controlled firing device developed during the Second World War that became obsolete shortly after the conflict. There are several accounts of its use on the Eastern Front as Soviet forces were being driven back by invading German armies. The first recorded use was on 12 July 1941 in the Russian village of Strugi Krasnye, where three devices were employed each detonating 250 kg of TNT. The signals initiating the firing devices were reportedly sent from 150 kilometers away.



F-10 Firing Device
Photo- Jouko Kuisma

The firing device consists of a control unit and an external 12-volt battery, both in cases of approximately the same size. Accessories include a 30-metre wire antenna, connecting cables for battery and antenna, and a rubberized carrying bag. Numerals painted on the control unit indicated the frequency range of that particular device.


The F-10 device was most frequently employed as Soviet forces departed an area. Devices were emplaced in large buildings, bridges, airfield hangers, repair shops, power plants, and dams. The objective was to kill large numbers of enemy forces bivouacked in buildings, as well as to destroy high value targets.

To prepare the firing device for use, the control unit and battery were connected, and the antenna connection cable was installed. Additionally, up to three firing wires were connected to the control unit and could be deployed to any of three separate explosive charges up to 50 metres away. The control unit and battery were placed in the rubberized bag and normally hidden inside walls, or could be buried to a depth of eight feet. The antenna connection cable was laid out to a maximum distance of 40 metres from the control unit. It was then connected to the 30-metre antenna, which was oriented in the direction of the expected firing signal. The antenna could apparently be buried to a depth of four feet (122 cm), or laid underwater to a depth of 1.5 feet (45.7 cm), and still reliably receive a firing signal.

When placed into operation, the F-10 was limited by its battery life. Since the control unit operated on vacuum tubes that required constant energizing, the battery was drained after only four days. To extend the battery life, a clockwork mechanism was incorporated that allowed the system to power down for a short period of time – for either 2.5 or 5 minutes (i.e., 2.5 or 5 minutes on, 2.5 or 5 minutes off). This extended the battery life to 20 days for the 2.5-minute cycle, or 40 days for the 5-minute cycle.

Overall, Soviet reports indicate that the F-10 system was unreliable, and it was recommended that two or three firing devices should be used against each selected target.

An improved version, F-40, was developed with cylindrical bodies and batteries. No other information is currently available. The F-40 was followed by the F-TD, a less expensive version. Again, no further information is currently available.

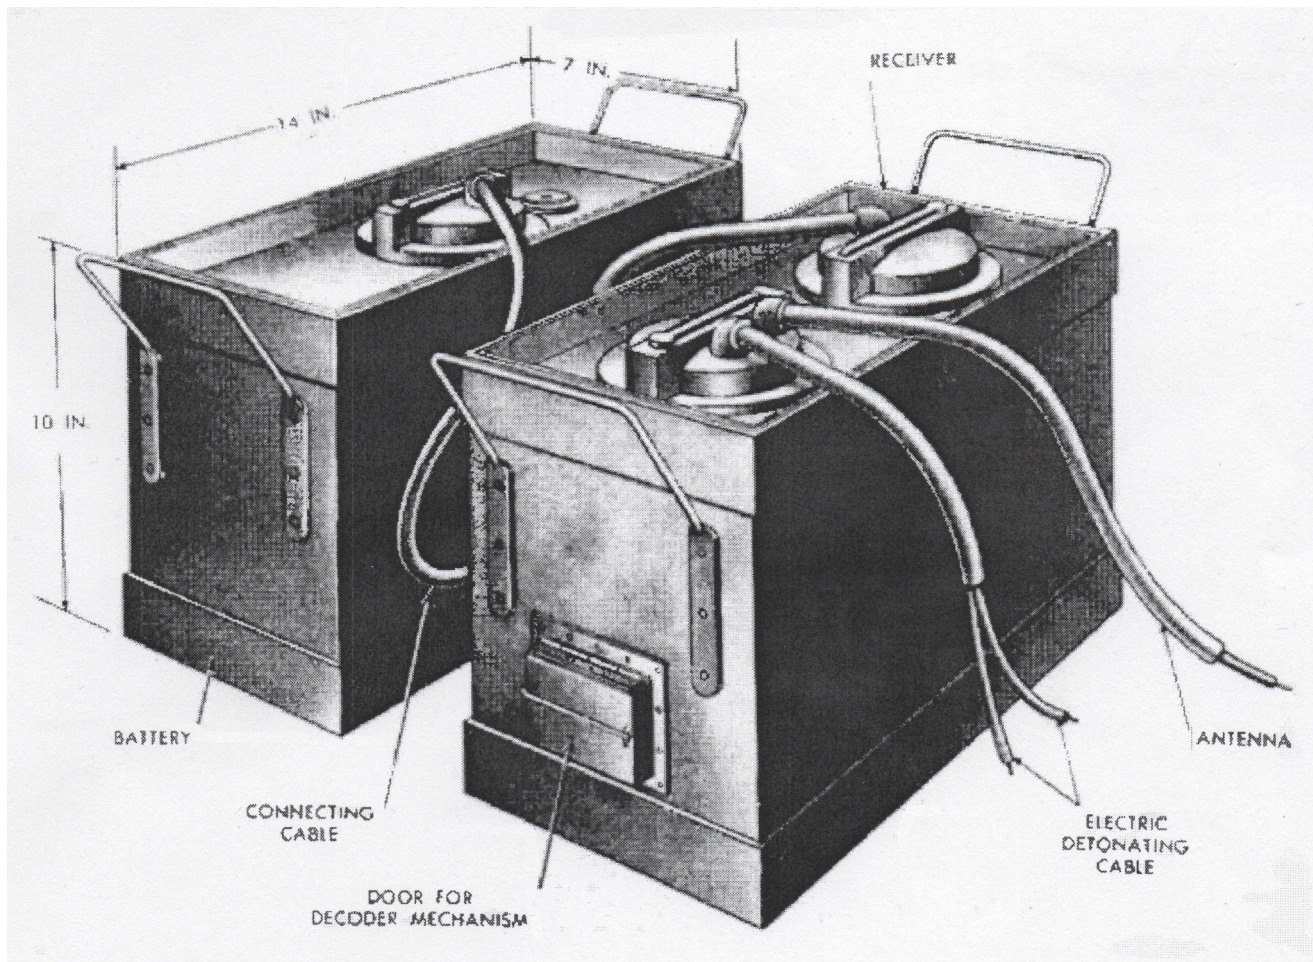

F-10 Firing Device

IZER-2 (ИЗЕР-2)

Type - Vibration


Weight - 6.1 lb. (2.7 kg)

Diameter - 4.0 in. (102 mm)

Height - 8.0 in. (206 mm)

This device was developed during WWII, mainly for mining railroads. It is waterproof and could be used underwater. It is no longer in service.

The IZER-2 has a cylindrical base made of metal. The internal mechanism is mounted in the centre of the base and is covered by a brass dome that is sealed and bolted to the base. The internal mechanism consists of a spring suspended weight, an electromagnet, spring-loaded contact lever and spring-loaded actuating lever. Two electrical leads protrude from the base of the device and are sealed to waterproof the device.

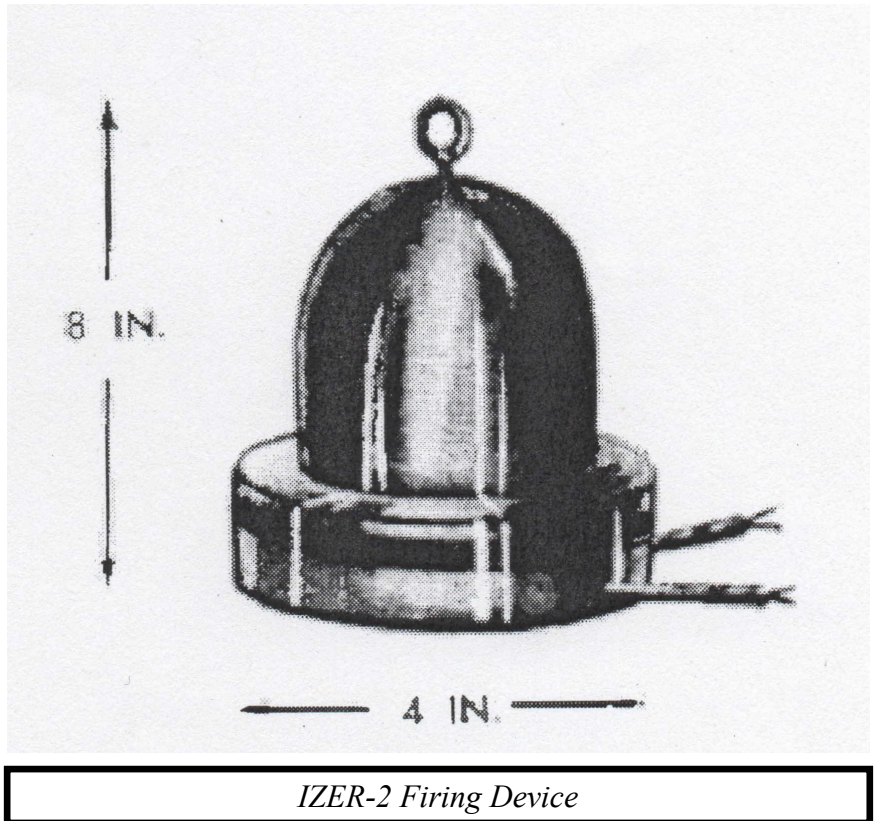

For use, the device is normally buried about 3 feet (91.4 cm) under a railbed. The charge is normally a distance away from the device and is connected by an electrical circuit. A chemical or clockwork delay is often inserted in the circuit for safety. When the delay expires it allows current from the battery to reach the device to magnetize the electromagnet closing the arming contact. The device is then armed.

When a train is running on the track it creates vibrations that will reach the buried device. The vibration causes the spring suspended weight to move downwards. As the weight moves downwards it forces down on the actuating lever closing the contacts and completing the circuit.

Koveshnikov (Ковешников)


Type - Pressure-Release/Pull

Diameter - 0.5 in. (13 mm)


Height - 2.0 in. (50 mm)

The Koveshnikov fuze is exactly the same concept as the grenade fuze of the same name. In effect the only difference is the lack of a safety lever. The grenade fuze was developed in 1931. Likely this was of the same time period.

The device consists of a body, striker, striker spring, cap, actuating spring, retaining ball and safety pin. The body is brass with the base externally threaded to fit either a grenade, mine, or a small demolition charge. There is a shoulder at the top of the threading. The base is also internally threaded to accept an MD-2 detonator assembly. The body is bored out from the bottom leaving a solid top. A smaller hole is drilled through the top to fit the striker shaft. There are two holes drilled in the side of the body, a larger one to fit the retaining ball and a

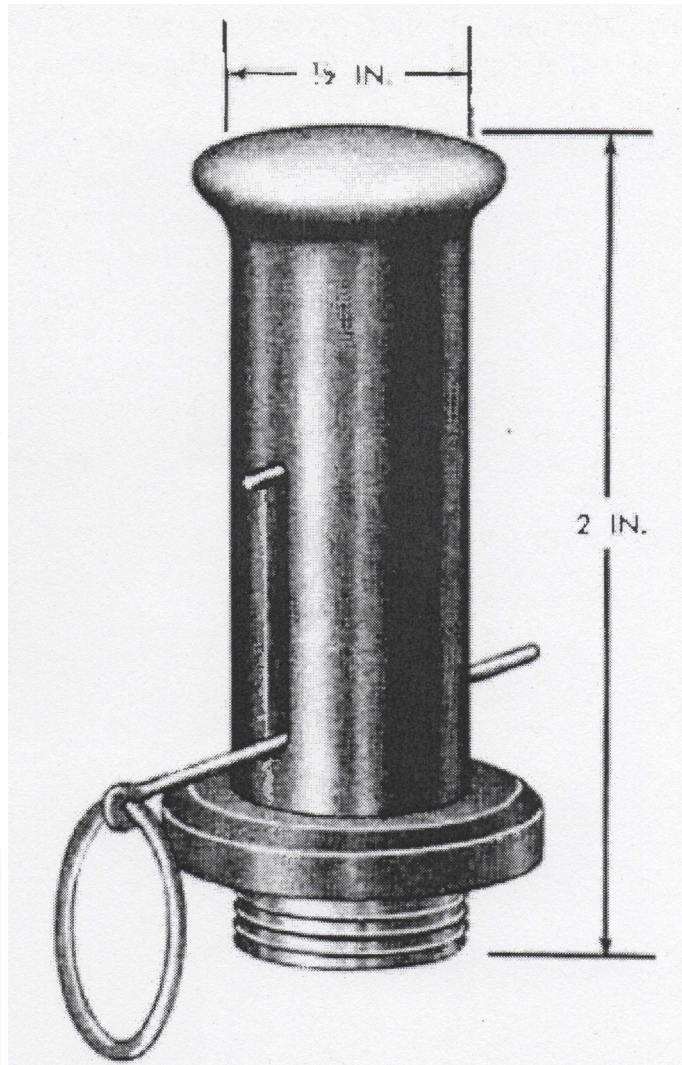

Koveshnikov Firing Device

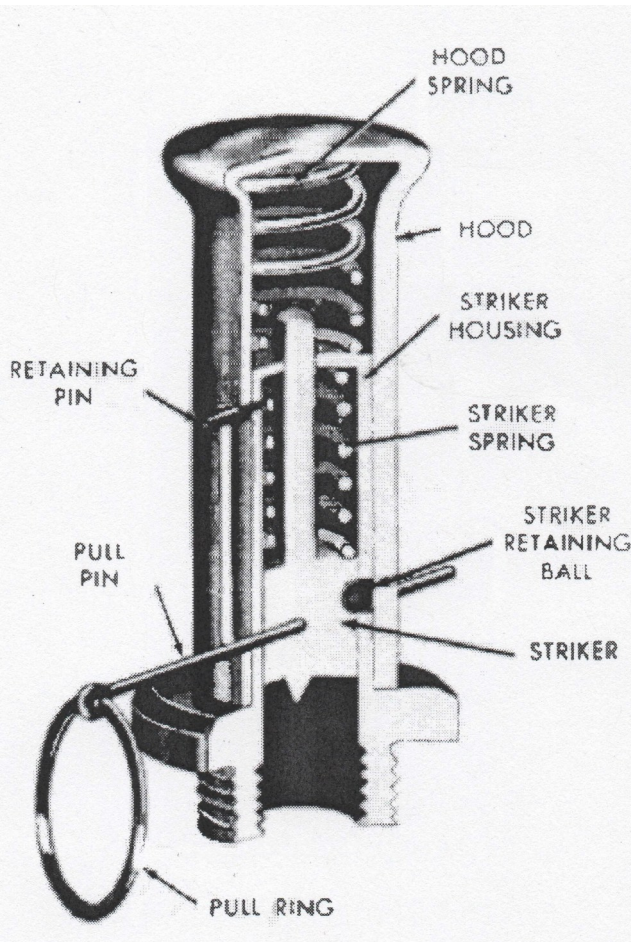

Koveshnikov Firing Device internal diagram

smaller hole at 90 degrees to the larger hole to fit the safety pin. The striker has a head to fit inside the body with a firing pin in the centre and a shaft on the opposite end. A dimple in the side of the striker is for the retaining ball and a hole to match the safety pin is drilled completely through. The cap fits over the body and has an elongated slot in the side. A retaining pin near the top prevents the cap from sliding off the body.

The device is assembled with the actuating spring inside the cap being slid over the top of the body and the retaining pin inserted. The striker spring fits over the shaft on the striker. It is pushed up into the body compressing the spring with the shaft fitting through the hole in top of the body. The retaining ball is inserted, the cap pushed down to cover the ball and compress the actuating spring. Finally, the safety pin fits through the cap, body and striker to hold the device safe.

The device is normally used as a pull fuze but can also be used as a release device. For use as a pull fuze, the safety pin is used as a pull pin, a wire attached to the pin will pull the pin as the wire is tripped. The actuating spring in the cap forces the cap upwards exposing the retaining ball. The striker spring forces down on the striker which pushes the retaining ball out and frees the striker to be driven down onto the primer in the MD-2 detonator assembly. For use as a release fuze, emplace the charge and fuze and put a weight on top sufficient to hold the cap in place and remove the safety pin. When the object is moved, the fuze will operate normally.

ML-7 (MJ-7)

Type – Pressure-Release
Weight – 3.5 oz. (100 g)
Length – 2.8 in. (72 mm)
Width – 2.7 in. (69 mm)
Height – 1.1 in. (30 mm)

This is a pressure-release (anti-lift) firing device adopted by the Soviet armed forces in 1984. It is a small, multifunction boobytrap device with integral explosive charges. It was used in Afghanistan (approximately 2,000 units were deployed) to boobytrap antipersonnel mines in an attempt to keep Afghan Mujahidin guerrillas from clearing minefields. The ML-7 (also designated as the VP-11) was also used in Chechnya, and has been supplied to Soviet allies in Belarus, Kazakhstan, Kyrgyzstan, Tajikistan, Turkmenistan, and Ukraine.



ML-7 Firing Device

The ML-7 is a mechanical, delay-armed, cocked striker firing device. It is constructed of plastic, and

its main components are: a main body containing the VGMS-1 hydro-mechanical fuze; two cylindrical, aluminum-cased booster capsules containing 0.35 ounces (10 g) of PETN; and two plastic-cased, removable charges each containing 1.4 ounces (40 g) of PVV-5A plastic explosive.

There is a range of colours for the firing device and its components, including grayish-blue, yellowish-gray, sandy brown, and olive green. Some devices are unmarked but most are marked with the designation, manufacturer, batch number and year of



ML-7 Firing Device showing the two removable booster charges


manufacture. Markings are in black.

Prior to use, the two explosive charge containers are removed, the booster capsules inserted, and the explosive charge containers replaced. The device is now ready for emplacement and use.

If utilized as an anti-lift device for a mine, or boobytrap, the ML-7 is placed under an object, which must weigh at least 10.5 ounces (300 g), and the arming ring is withdrawn. This allows three ball bearings, which are set in a viscous gel that allows delayed arming, to move and initiate the arming delay, 45 seconds to 20 minutes, dependent upon ambient temperature. Once armed, if the load bearing object is removed and the hinged plastic lid of the firing device moves approximately 0.2 in (5 mm) the ML-7 will function and cause a detonation.

The ML-7 can also be used as a small demolition charge immediately upon arming (45 seconds to 20 minutes), by not placing an object on the hinged plastic lid, and then removing the arming ring. Finally, it also has the option of functioning upon pull initiation, after attachment of a tripwire to a pushrod retaining pin at the base of the fuze.

The ML-7 mine is intended for the installation of anti-tank mines and explosive charges in an unpredictable position and for use as a mine-trap



Type of mines compatible with ML-7	PMM, PMN-2
Type of sensor enabling mine concealment	Pressure-release
Minimum required activation load	0.3 kg
Time delay after activation	From 45 s to 1200 s
Time delay duration	Depending on ambient temperature
Temperature operating range	From -40°C to +50°C
Weight:	
mine	0.1 kg
explosive charge	0.04 kg
Mine dimensions	72-69-30 mm

1.	Partially armed mine	1 pc.
2.	Additional detonator	2 pcs.

After removing the safety pin and rod pin, and after the delay time elapses, the ML-7 mine is armed. When pressure is removed from the installed mine (object), the spring-loaded rod acts on the lever, raising it together with the cover. When the cover is lifted by 6–8 mm, the rod is released and the firing chain is closed. Simultaneously, the striker operates and pierces the detonator cap, causing detonation of the detonator, additional detonators, and the mine charge.


1. Charge in plastic casing, 2. Additional detonator, 3. Igniter, 4. Spring clamps
5. Ring, 6. Safety pin, 7. Shear ring, 8. Mine body, 9. Ribbon for pin removal
10. Pin, 11. Cover, 12. Hydromechanical delay mechanism, 13. Stopper
14. Percussion mechanism, 15. Slider with detonator cap, 16. Detonator
17. Double lever, 18. Spring-loaded rod, 19. PMN mine, 20. ML-7,
21. PMN-2 mine, 22. Military water canteen

WARNING: Attention! All final operations for installing and camouflaging the mine, the charge, or other mined object, carried out after pulling out the safety pin of the ML-7 mine, must be completed within no more than 30 seconds.


With the PMN mine

19

20

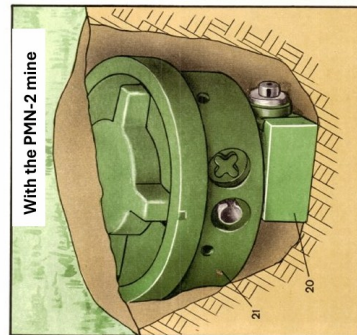

When setting a booby trap

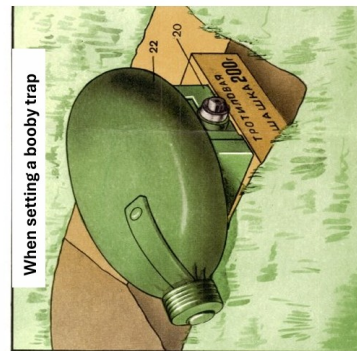

Prohibited: carrying the M1-7 mine in a combat-ready state; installing a mine without a safety pin or safety cap; placing any object into the mine; moving a mine that has been installed; removing the safety pin and safety cap from a mine before installation

Chief Editor M. T. Rukhadia, One print run.
 Editor N. I. Deglyazov.
 Editor O. I. Ivanov. An Editor V. P. Safonov.
 Technical Editor V. I. Dvornov. Proofreader N. G. Korheltova.

MOSCOW
MILITARY PUBLISHING HOUSE
1964

Mechanically translated using Copilot

Approved for printing 03.10.94. Format 60×90/16.
Offset paper. Offset printing. Standard print sheets 1. Standard color impressions 6.
Publisher's No. 844830. Production order 0384.

ML-8 (MLI-8)

Type – Pressure-Release
Weight – 13.0 oz. (370 g)
Length – 4.4 in. (114 mm)
Width – 2.3 in. (60 mm)
Height – 1.5 in. (40 mm)

This is a pressure-release firing device adopted by the Soviet armed forces as an anti-lift device for antipersonnel and antitank mines that do not have integral anti-handling features. It can also be readily adapted for use as a boobytrap, or sabotage device. The ML-8 was reportedly designed and developed by Viktor Popov Aleksandrovich

sometime in the early 1990's. It was produced toward the end of the Soviet Union (1991) and extending on in a limited basis in the Russian Federation. One of the manufacturers was the Saranskiy Mechanical Plant. It has been documented in operational use in the Ukrainian Donbass conflict and subsequent Russian incursion into Ukraine.



ML-8 Firing Device

The ML-8 is a pyrotechnically armed, cocked striker firing device. The body is rectangular plastic and accommodates a fuze assembly, as well as an explosive charge. The body has a hinged plate covering the triggering mechanism that initiates the firing device. The fuze is screwed longitudinally into the side of the body. It consists of an initiation mechanism, two sequential pyrotechnic arming delays, a mechanical arming switch, and a firing mechanism. The fuze assembly is designed to ensure the safety of the device in storage, transport, and handling. Opposite the fuze assembly, the firing device body also contains a removable ("clip-on," similar to the ML-7) charge of PVV-5A plastic explosive.

The fuze assembly is enclosed by a screw-on cap and consists of a nylon cord that passes into the fuze. It is connected to a plate in the bottom of the initiation mechanism, and when pulled initiates the pyrotechnic arming delays. The arming delays function in the temperature range of - 40 to +50 degrees. The first arming delay is contained in a grooved circular disc and will burn for 120 to 150 seconds. The flammable composition consists of SC-1, V-II as well as a pressed quantity of TMS-06. After the first arming delay is complete, a second pyrotechnic delay consisting of two cylindrical channels is initiated, with a burn time of approximately two seconds.

The completion of both pyrotechnic delays allows a mechanical arming sequence to take place, which removes the remaining safety blocks and allows the striker assembly to align with the KD-N-10 detonator. The detonator is positioned over a booster charge consisting of 0.14 ounces (4 g) of PETN. The main explosive charge consists of 2.8 ounces (80 g) of PVV-5A, which is enclosed in a detachable container that engages with grooves on the side of the body.

When emplaced as an anti-handling device, the ML-8 is installed under the bottom of antipersonnel mines, such as the MON-50, the PMN series, the PMD-6 series, or OZM-72 and POB bounding fragmentation mines. It can also be emplaced under antitank mines, such as the TM-62 series, as well as others. When an attempt is made to move the mines, the ML-8 explodes, killing or injuring whoever is attempting to remove it. It is also likely that the boobytrapped mine itself will

sympathetically detonate, further killing or severely injuring personnel.

When used as a standalone boobytrap, it is buried in the ground under an object that is likely to attract the attention of opposing forces and entice them to pick up or move the items. In this application, the firing device's integral explosive charge is sufficient to cause injury to personnel.

The firing device comes ready for use, and requires virtually no preparation. The device is simply emplaced under a mine, or an object weighing at least 8.8 ounces (250 g) is placed on top of the device, i.e., on the hinged lid. Situation specific camouflage is then applied. The last step is to remove the screw-on cap in the fuze assembly, exposing the initiation mechanism. Under the cap is a thin, nylon cord. Once this is grasped and pulled, a spring-loaded striker is released into a flash



ML-8 Firing Device note the markings on the side
Photo- Fenix Insight

primer, and rotates an attached plate 90 degrees revealing a flash channel to the arming delay contained in a circular disc. After approximately 2 to 2.5 minutes, the pyrotechnic delay flashes down to two pyrotechnic pellets that burn for approximately two seconds. At the end of this time, sliding detents beneath each consumed pellet can move up into the cavity once occupied by the pyrotechnic pellet. One detent removes a locking ball from the firing mechanism, while the second detent allows the detonator

to be moved into line with the striker assembly in the firing mechanism. The ML-8 is now fully armed and only requires the removal of the object placed on its hinged pressure plate to function. When the object on the pressure plate is lifted less than 0.5 inches (12.7 mm) a spring-actuated rod lifts the pressure plate and releases the striker assembly into the detonator, which initiates the booster charge. The booster charge, in turn, detonates the main charge.

Emplacing the ML-8 is quite safe. From the initial withdrawal of the nylon cord, there is a 2 to 2.5 minute delay to allow movement to a safe area. Temperature does not affect the delay period.

MPM-E (MIIM-Э)

Type – Vibration

Weight – 33.1 oz. (940 g)

Length – 6.2 in. (160 mm)

Width – 3.9 in. (100 mm)

Height – 1.9 in. (50 mm)

The MPM-E is a self-contained demolition charge intended to destroy vehicles in motion. It is a limpet type explosive charge utilizing magnets to adhere to its target. It incorporates the VZ-37 fuzing system.



MPM-E demolition charge

The MPM-E contains 0.005 oz. (0.164 g) of A-IX-I (95% RDX) explosive. It incorporates an arming delay of 9-25 minutes, and will reportedly self-destruct in 48 hours.

MS-2 (MC-2)

Type - Pressure-Release
Weight - 19 oz. (540 g)
Length - 7.4 in. (189 mm)
Width - 3.3 in. (85 mm)
Height - 1.3 in. (35 mm)

Produced during WWII as an anti-lift device for anti-tank mines it could also be used as a boobytrap. It is in fact a modification of the PMD-6 anti-personnel mine.

The device consists of a wooden body casing,



MS-2 Anti lift device

igniter, spring, two pins and a standard (seven-ounce) 200-gram explosive charge. The casing is the same as the PMD-6 mine. It is a wooden box nailed together, with a lid hinged at one end. The lid fits over the lower casing. The end opposite the hinge has a vertical slot in the centre. The igniter is normally an MUV but may also be a UV or UVG. The spring is specially made with a “V” in the centre, spring coils at the base of the “V” and the ends left long and straight. The pins are long enough to fit all the way through the body, one is part of the ignition system, the other acts as a safety pin.

The spring is mounted on an axle just in front of the explosive charge about 1/3 of the way from the front of the body. It is mounted so that the “V” will abut the lid and the ends the bottom of the body.



Design of the lift spring for the MS-2

The MUV igniter uses the “P” shaped pin rather than the normal “T” shaped one. There are holes drilled through the body to fit the pins, one is located right at the front of the lid so that the pin will fit through the front wall of the lid lengthwise. The other is drilled through the lid and main body to prevent the lid lifting up. When assembled the explosive charge is inserted into the body and the igniter and attached MD-2 detonator assembly fitted so that the shaft of the striker, with the pin inserted will protrude through the slot in the front of the lid. The spring is pushed down to cock it and the lid closed against the pressure of the spring. The safety pin is inserted to prevent the lid lifting. The other pin is then inserted through its hole ensuring that it engages through the igniter pin.

When used as an anti-lift device, it is placed in a small hole underneath an anti-tank mine. The safety pin is removed and the whole either buried or camouflaged. The last step is removing the safety on the mine itself. If the mine is lifted the spring in the device reasserts itself and will push the lid upwards pulling the “P” shaped pin out of the MUV igniter which will then operate as normal and cause the device to explode. The explosion of the anti-lift device will most likely also cause detonation of the mine as well.

If used as a boobytrap a weight of at least 6.6 pounds (3 kg) must be placed on top of the device. The device will operate exactly as if a mine had been lifted off it. The detonation of the (seven-ounce) 200-gram explosive charge is enough to kill or wound whoever removes the weight from the device.

MS-3 (MC-3)

Type - Pressure-Release
Weight - 23.2 oz. (660 g)
Diameter - 4.3 in. (110 mm)
Height - 2.5 in. (65 mm)


This is a pressure-release (anti-lift) firing device introduced into the Soviet armed forces in the 1970s. The Russians classified the MS-3 as a “surprise mine” that, in more practical terms, means boobytrap. Although over 50-years old, the firing device is still encountered in various parts of the world, such as Afghanistan. The Romanian arms manufacturer, ROMTEHNICA, is also known to have produced an indigenous version of the MS-3.



Inert MS-3 Firing Device

The MS-3 was specifically designed to serve as an anti-lift device for the Russian OZM-72 bounding fragmentation mine, and has the same diameter, in order to fit neatly underneath the mine when buried. However, it can also be used to boobytrap other mines, to include antitank mines. It has also been used to boobytrap other objects, such as stacks of ammunition in Angola, as an example.

The device has virtually the same configuration as the Russian PMN antipersonnel mine. It consists of a Bakelite body, with a black rubber cover with a truncated cone in the centre covering the spring-loaded pressure-release mechanism. The internal components consist of a lead alloy shear strip that serves as an arming delay and incorporates a spring-loaded striker, a spring-loaded pressure-release mechanism, an MD-9 stab-sensitive detonator assembly, and a 11.9-ounce (340 g) Trotyl (TNT) explosive charge.

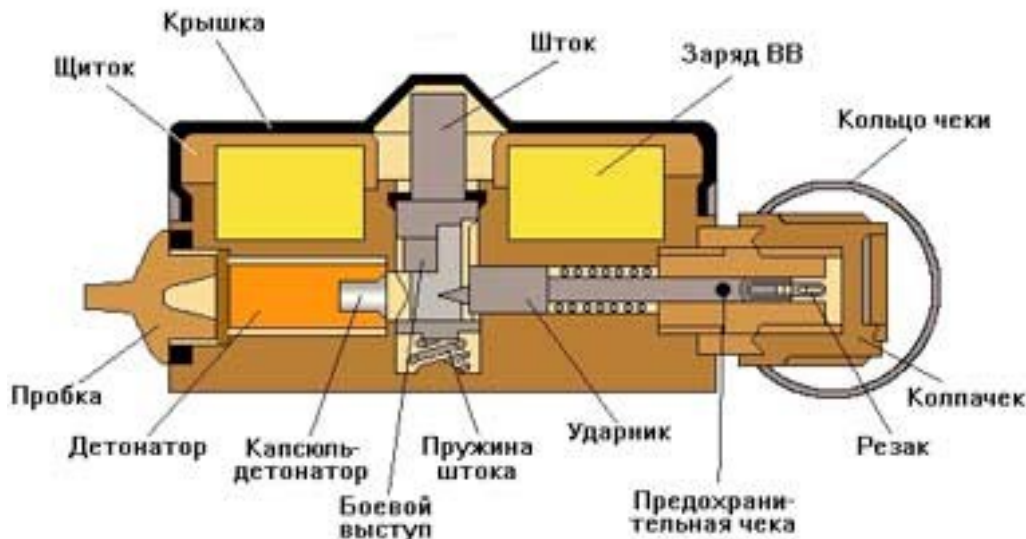

Internal view of the MS-3

The device is brown with a black rubber cap. Markings on top give the designation, manufacturers code, batch number and year of manufacture.

Prior to use, a temperature appropriate lead shear strip is selected and inserted in the arming delay assembly. The firing device is supplied with two lead shear strips – one for summer and one

for winter. The firing device is issued with one shear strip installed in the arming delay, and one located in the arming delay cover. The operator simply has to select which one to use. The firing device is then placed under an object that weighs at least 11 pounds (5 kg), which depresses the internal, spring-loaded pressure-release mechanism. After this has been accomplished, the safety pin in the arming delay is removed. After a delay, 5 minutes to 15 hours depending on ambient temperature, the cutter assembly will cut through the lead shear strip, thus arming the MS-3 by freeing the spring-loaded striker. When the weight on the firing device is removed, the pressure release mechanism frees the spring-loaded striker to initiate the detonator, and the device functions.

The MS-3 can be used as a stand-alone, delayed action demolition charge by simply *not* placing any weight on top of the device, and removing the safety pin. After a certain amount of time (determined by ambient temperature conditions), the cutter assembly in the arming delay will shear through the lead shear strip, releasing the spring-loaded striker into the detonator.

.

MS-4 (MC-4)

Type – Anti-disturbance

Weight – 14 oz. (410 g)

Length – 6.1 in. (155 mm)

Width – 3.6 in. (92 mm)

Height – 1.2 in. (31 mm)



MS-4 Firing Device
Photo- Oleksandr Mariash

This is an anti-disturbance (tilt/trembler) or delayed action firing device that was introduced into the Soviet forces in the mid-1970s. The Russians considered it a multipurpose mine, and nicknamed it the “MS-4 Boot Mine.” However, for practical purposes, because it contains a relatively small 4.23 oz. (120 g) explosive charge, it is normally employed as an initiating device for a larger charge of explosives. It is well suited to be used as a boobytrap for antipersonnel or antitank mines, as well as a firing device for a larger, emplaced demolition charge.

The MS-4 can be employed to function as: (1) a delayed-action firing device, with a 15-minute to 360-hour time delay; (2) a boobytrap device employing a tilt switch that will function if it is moved more than 20 degrees in any direction; or (3) if it is set in a vibration mode, it will function if it senses any movement. If the MS-4 is utilized as a time-delay firing device, a lead alloy shear strip (suitable for



*Internals of MS-4, wooden block representing the explosive charge
Photo- Oleksandr Mariash*

the time delay desired) is utilized. This appears to be identical to the Russian VZD-3M. When employed in the boobytrap mode, an arming delay of 15 minutes to 360 hours can be set. The particular function mode of the firing device cannot be externally determined. It does not contain a self-destruct feature; however, it should become inoperative at the end of its battery life (~six months).

The device consists of a container with a hinged lid, an internal explosive charge, and a removable tray that contains all of the arming and firing components, as well as the battery compartment.

The device is painted olive green with no external markings noted.

Prior to use, the hinged lid is opened, and the removable tray is withdrawn by using an attached white cloth pull tab. A 4.23 oz. (120 g) block of Trotyl is connected to the explosive adapter on the side of the tray. The function mode is then selected by rotating the three-position selector switch to the desired feature – time delay, tilt, or vibration. If tilt or vibration is selected, then a separate switch is used to determine the arming time. The last step is to remove the red cloth arming tab. The firing device is now ready for placement and use.

MS-5 (MC-5)

Type – Pressure-Release

Weight – 23 oz. (660 g)

Length – 4.2 in. (107 mm)

Width – 3.2 in. (82 mm)

Height – 0.7 in. (20 mm)

Russian documents identify the MS-5 simply as a device “intended to defeat enemy forces,” with an ignition element that is “mechanical with a metal element.” It is believed to be a pressure-release firing device.

The firing device consists of a metal casing resembling a cigarette case, an embedded 3.8 oz. (110 g) TNT explosive charge, an arming and striker assembly, and an MG-8-T detonator.

The casing of the device has a hinged body that allows it to be opened like a cigarette case. This allows for the safety pin to be removed from the arming and striker assembly. The arming delay is very similar to those seen in the MUV-2 and MUV-3 firing devices in that it incorporates a soft metal strip that the striker assembly cuts through over a period of time. The arming delay time ranges from 15 minutes to 360 hours, solely dependent upon ambient temperature. The temperature range for the proper functioning of the MS-5 is -40 to +40 degrees Centigrade.




MS-5 Firing device showing the internal mechanism.

Photo- Oleksandr Mariash

It is believed that once the delay element has expired, if the casing is opened the device will detonate, or the interior mechanism can be emplaced under some other object, when the object is moved and the weight removed, the device will detonate.

Further technical and operational details of the MS-5 are unknown.

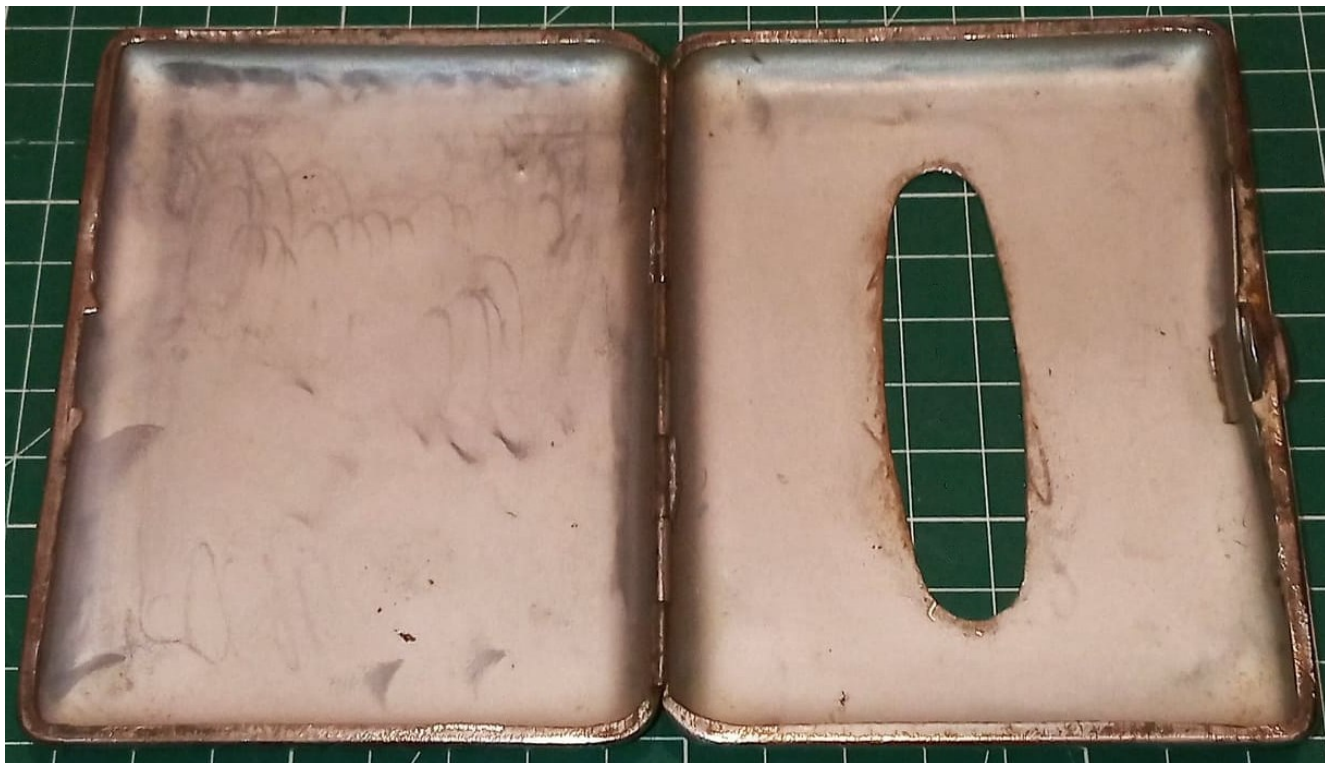

Outer casing of MS-5 firing device
Photo- Oleksandr Mariash

UV (YB)

Type - Pressure/Pull

Weight - 5.2 oz. (147 g)

Length - 4.1 in. (104 mm)

Diameter - 0.5 inch. (13 mm)

The UV firing device was adopted in early WWII, perhaps a bit earlier. Most observed examples have a date of 1940.


The device consists of a body, striker, striker spring, arming pin, transit/safety pin and the base adapter. The main body is made of steel and may have a copper wash for rust prevention. The body is cylindrical with the top end closed with a small hole in the centre to allow the striker shaft to protrude. The opposite end has some internal threading to allow the adapter to screw in.

There is some knurling at the top end. The striker has a shaft with a guide on the bottom end above the striker head. The striker point is quite rounded. There are two holes in the striker, one near the top end to hold a transit/safety pin and one further down for the arming pin. The striker spring fits between the top of the body and the guide on the striker. The base adapter has a short threaded portion to fit into the body of the device. It is necked down to leave a hole just large enough to fit a non-electric detonator. Knurling around the top end of the adapter provides a gripping surface. The adapter contains a percussion primer.

Markings on the body just below the knurling at the top give a manufacturers number code and the year of manufacture.

For use, the device is prepared by pulling on the transit/safety pin to draw the striker back so the arming pin can be put into place and hold the device in the cocked position. The adapter is screwed in and a detonator fitted. The armed device can then be placed into the mine or charge. The arming pin can be a straight pin with a loop or one in a "T" shape designed especially for use in mines. Once emplaced, the safety pin is removed.

When a pull is applied (or when 20-40 pounds of pressure is applied) to the arming pin, it is pulled out of the striker pin allowing the striker spring to reassert itself and drive the striker down to hit the percussion cap. The percussion cap firing will cause the detonator to fire and in turn detonate the main charge.

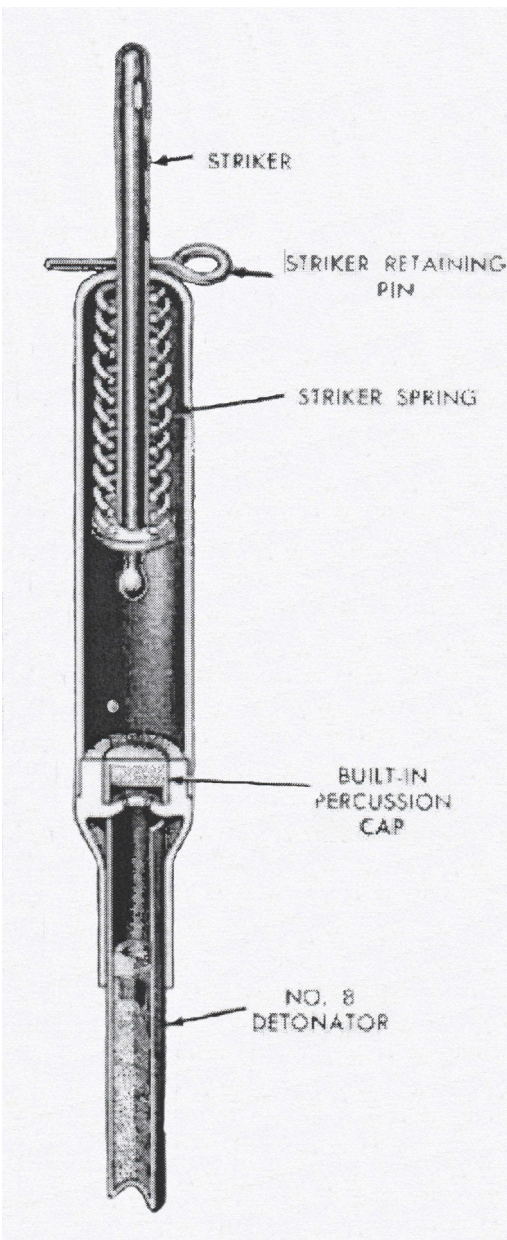

UV Firing Device internal diagram



UV Firing Device


UVG (УВГ)

Type - Pressure/Pull

The UVG is a simplified firing device made from a cartridge casing. They were made in Russian Soviet State cartridge factories using a simple and readily available body. In all respects they are the same as a UV fuze. Made and used during WWII these are no longer in service.

The body is a 7.62 x 54R cartridge casing modified by drilling out the primer pocket to fit the end of the striker and having corrugations pressed into the side of the casing to form guides to keep the striker centred so it will strike the percussion cap properly. A striker and spring are fitted inside the casing and held in place by a release pin through a hole in the end of the striker. A detonator assembly with percussion cap is fitted in the end of the casing. There are other variations that have been noted with the base cut off and the neck used as the top of the device. It is likely that the variations come from different factories.

Use is exactly the same as the UV.

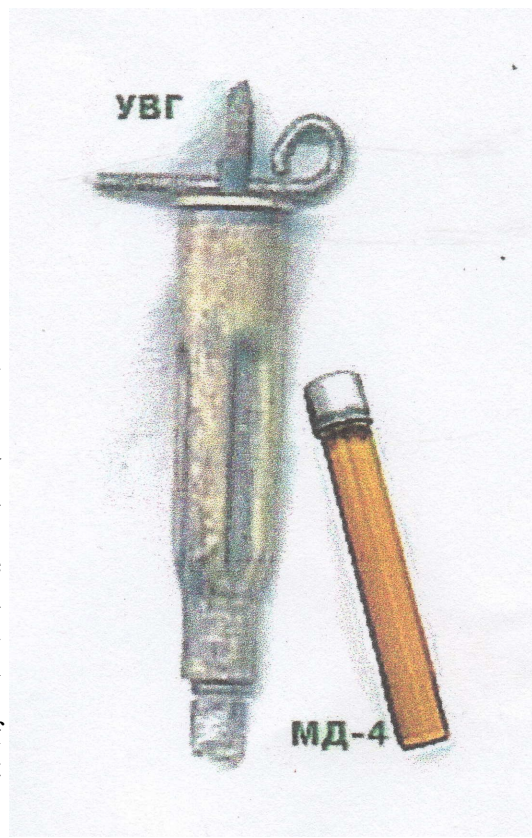

UVG Firing Device



Variations of the UVG Firing Device

MUV (MYB)

Type - Pressure/Pull

Weight - Metal - 0.8 oz. (25 g)

Plastic- 0.6 oz. (16 g)

Length - 2.9 in. (75 mm)

Diameter - 0.4 in. (12 mm)

The MUV was developed in about 1940-41 to replace the UV fuze. Modifications included the striker head and the internal threading to match the MD-2 detonator assembly. It has been in use since adoption and is likely still to be found in use. The MUV has been extensively copied by other nations. It is used by China as the Type 59, the former East Germany as the MUW and Bulgaria to mention a few.

The device consists of a main body, striker, striker spring, transit pin, arming pin and base. The main body is a cylindrical steel tube with one closed end and the other end internally threaded to accept the base. The closed end has a hole in the centre to allow the shaft of the striker to pass through. A band of knurling is normally found near the top. The striker has a shaft with a striker head on the bottom end. Around the striker head is a guide washer. There are two holes in the shaft, one at the top end for the transit pin and one further down for the arming pin. Examples have

been found with a flat striker stamped out of sheet steel. The striker spring fits around the shaft above the guide washer. The transit pin is simply a straight pin, the arming pin has a short shaft with a ring formed to attach to the trip wire. For use in a mine the arming pin is replaced with a T-shaped pin. The base is an MD-2 detonator assembly consisting of a threaded base, percussion cap and TAG-8A detonator. It could also be fitted with the later MD-5 detonator assembly which uses a TAT-8A detonator.

It should be noted that the MUV has a number of different body styles and materials. The closed end can be quite flat with only a minimum of rounding off, it can be quite rounded or someplace in between. The knurled bands can be wider or thinner, heavy or light. The body is normally steel, but has been found in plastic as well (first noticed in the Korean War). The plastic bodied MUV is internally identical to the metal bodied ones. The difference is the body itself is made from plastic. Normally a green plastic although examples have been noted in brown, black and cream. It is unknown if they are all of Russian manufacture or from one of the other countries that have copied it.

The bodies are normally unpainted with a stamped marking around the top. Markings give the



Oval striker MUV on left, flat striker MUV on right



designation, factory and year of manufacture.

The device is normally issued un-cocked. The arming pin is slipped over the exposed striker shaft and kept in place by the transit/safety pin. At this point there is a small amount of spring tension on the striker to hold the striker down and put pressure on the pin to hold it in place. For use, separate the arming pin from the shaft, pull up on the transit/safety pin until the hole for the arming pin is clear and insert the arming pin. Screw in the detonator assembly and insert the firing device in the main charge. Attach the trip wire and when set, remove the transit/safety pin. The device is armed. When the arming pin is pulled out, the striker spring reasserts itself and drives the striker down to hit the percussion cap. The percussion cap fires into the non-electric detonator causing it to fire which in turn causes the main charge to explode.

The MUV will operate with a pull of 2-6 pounds (0.9 – 2.7 kg) or a pressure of 4-30 pounds (1.8 – 13.6 kg).

Plastic-bodied MUV Firing Device

MUV-2 (MYB-2)

Type - Pressure/Pull

Weight - 1.4 oz. (40 g)

Length - 3.3 in. (84 mm)

Diameter - 0.4 in. (12 mm)

This is a modification of the MUV fuze to incorporate a delayed arming device. The MUV-2 has been copied by other countries, including Bulgaria where it has a Bakelite body and the designation MUV-2M. The MUW-2 is a former East German copy and can be identified by the gold-anodized arming delay mechanism attached to the metal fuze body.

The device consists of a main body, striker, striker spring, delay device body, delay element, arming pin, safety pin, cap and detonator assembly.

The main body is identical to that of the MUV. The striker has a shaft with a striker point formed on the bottom end. A guide is either formed with the striker or added as a separate washer just above the striker point. Rather than being round it is triangular in shape. An elongated hole 7/16 inches (11 mm) long is located in the upper half of the striker shaft. At the top end, a stiff wire loop is attached. The striker spring is a strong coil spring 2 inches (51 mm) long. The delay device body is cylindrical with a groove just below the top. The top is split by two slots at 90 degrees to each other. At the bottom there is a slot to fit the arming pin, just above that is a hole to fit the safety pin 5/16 inch (8 mm) above the slot. The delay element is a soft metal strip that is fitted through one of the top slots and bent around into the groove around the top to hold it in place. The delay element passes through the wire loop on the top of the striker. The arming pin can either be a loop for use as a pull fuze or a T-shape for use as a pressure fuze. The safety pin has a pull ring attached. The cap is either rubber or plastic and covers the top of the delay device. The base is a standard MD-2 detonator assembly or it could be fitted with the later MD-5 detonator assembly.

A later modification in the delay device has one larger slot in the top to fit the delay element which is a small wider piece of soft metal. It is held in position by a rubber band in the groove around the top. In all other respects it is the same.


When the device is set, upon removal of the safety pin, the striker under pressure of the spring pulls down in the elongated slot. As the striker is pulled down, the wire cuts through the delay element in about 25-30 minutes. Once it does that, the device is fully armed and removal of the arming pin will allow the striker under pressure of the spring to fly down and hit the percussion cap in the detonator assembly.

The device operates with a pull of 1-2 pounds (0.45 – 0.9 kg) or a pressure of 3-20 pounds (1.4 - 9 kg). The MUV-2 can also be used as a delay fuze by removing both the safety and arming pins.



*MUV 2 Firing Device
Upper safety pin is not as issued*

After the normal arming delay of 25-30 minutes, without the arming pin the device will operate as normal.

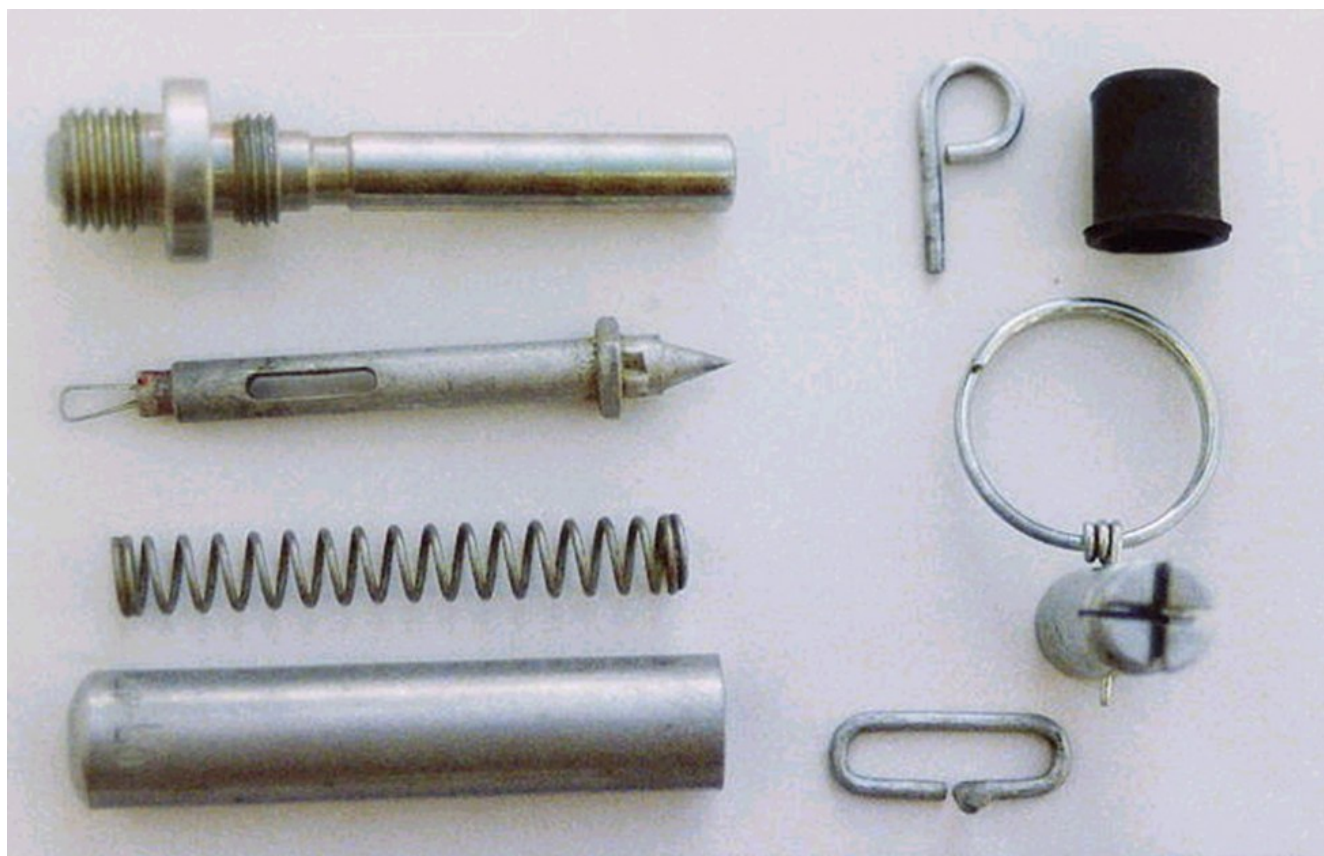

MUV 2 disassembled, note the detonator assembly is an inert training version

MUV-3 (MYB-3)

Type - Pressure/Pull

Weight - Metal - 1.4 oz. (42 g)

Plastic - 0.9 oz (28 g)

Length - 3.3 in. (85 mm)

Diameter - 0.4 in. (12 mm)

The MUV-3 is a slight modification of the MUV-2. In all respects it is identical with the exception of a clip on the arming pin to increase the amount of pull or pressure required to operate. The arming pin can be replaced by a T-shaped pin for use as a pressure fuze.

The MUV-3 can be found with either metal or plastic bodies. Metal bodies are normally unpainted with stamped markings around the top. Markings give the designation, factory and year of manufacture. Plastic bodies are normally green plastic with stamped markings around the centre of the body giving the designation, factory and date of manufacture.



Plastic body MUV-3 Firing Device
Photo— G. Zahaczewsky

The MUV-3 is normally used with the MD-5M detonator assembly.

After the arming delay has completed the device will operate with a pull of 3-13 pounds (1.36 – 5.9 kg). If used as a pressure fuze, it will operate with a pressure of 3-33 pounds (1.36 – 15 kg).

The MUV-3 can also be used as a delay fuze by removing both the safety and arming pins. After the normal arming delay of 25-30 minutes, without the arming pin the device will operate as normal.



Metal body MUV-3 Firing Device
Photo— G. Zahaczewsky

MUV-4 (MYB-4)

Type - Pressure/Pull

Weight - Metal - 1.9 oz. (54 g)

Plastic - 1.3 oz. (38 g)

Length - 4.4 in. (114 mm)

Diameter - 0.6 in. (16 mm)

The MUV-4 is another modification of the MUV series incorporating a delayed arming device.

The main body can be either metal or plastic and is virtually identical to other MUV fuzes except the metal version may have a groove around the top to accept the clip for the arming pin as used on the MUV-3. The striker has a shaft with a striker point formed on the bottom end. A guide is either formed with the striker or added as a separate washer just above the striker point. Rather than being round it is triangular in shape. An elongated hole 7/16 inches (11 mm) long is located in the upper half of the striker shaft. The top of the striker is turned to have a ball on the end with a groove immediately below that. The striker and striker spring fit through the body with the striker shaft protruding from the top of the body to engage the delay mechanism. The delay mechanism is fairly complicated. The bottom section fits over the striker shaft with a portion at the top that is wider and is drilled out wider than the striker and internally threaded. The bottom portion is drilled through with a hole just wide enough for the striker to fit. The bottom portion also has holes for the arming pin and safety pin. The centre section is externally threaded at the bottom to fit the lower section. The bottom is blind drilled about halfway through to form a bottom chamber. The top is also externally threaded and drilled forming an upper chamber leaving a constriction between the bottom chamber and upper chamber with a small hole in the centre. The top section is simply an internally threaded cap. Most of the mechanism is contained in the centre section. The top chamber contains a piston and piston shaft that fits through the hole into the bottom chamber. The bottom chamber contains a bushing with two holes for ball bearings. When the device is assembled the piston shaft is inserted in the bushing and protrudes from the top. It is trapped in the bushing by a wider base. When the bushing is assembled into the device the piston shaft enters the top chamber and the piston is fitted and clipped on. At the same time the striker shaft is inserted into the bushing and the two ball bearings engage the groove below the ball shaped head. When the bushing is inserted into the chamber the walls prevent the ball bearings from moving and so hold the striker in position. The arming pin fits through the body into the bottom of the elongated hole. The arming pin can be replaced by a T-shaped pin for use as a pressure fuze. The safety pin fits through the body into the top of the elongated hole. Once assembled the top chamber is filled with a silicone gel and the cap screwed on. The bottom of the body is internally threaded to accept an MD-5M detonator assembly.



*MUV-4 Firing Device with metal body
Photo- G. Zahaczewsky*

Metal bodies are normally unpainted with stamped markings around the top. Markings give the designation, factory and year of manufacture. Plastic bodies are normally green plastic with stamped markings around the centre of the body giving the designation, factory and date of manufacture.



When the safety pin is removed the striker spring exerts pressure on the striker. The pressure pulls down on the striker which exerts pressure on the bushing. The bushing exerts pressure on the piston and slowly draws it through the silicone gel which retards movement. When the entire mechanism moves downward the bushing moves down until the walls no longer prevent movement of the ball bearings. When the ball bearings are forced outward, they release the striker. At this point the striker is held only by the arming pin. When the arming pin is withdrawn it allows the striker under pressure of the spring to drive down and hit the percussion cap in the detonator assembly. The cap fires into the detonator causing it to fire and in turn detonate the main charge.

After the arming delay (1-30 minutes) has completed, the device will operate with a pull of 3-13 pounds (1.36 – 5.9 kg). If used as a pressure fuze, it will operate with a pressure of 3-33 pounds (1.36 – 15 kg).

The MUV-4 can also be used as a delay fuze by removing both the safety and arming pins. After the normal arming delay of 1-30 minutes, without the arming pin the device will operate as normal.

MUV-4 Firing Device with plastic body
Photo– G. Zahaczewsky

MV-1 (MB-1), MV-2 (MB-2), MV-3 (MB-3)

These are time delay firing devices that were introduced into Soviet service during the 1970s and early 80s. They were intended for use as sabotage devices by clandestine forces.

Each firing device consists of a hollow metal body. Internally, they have initiation mechanisms that incorporate a delay element, sleeves containing a primer, as well as detonators. Each firing device is supplied with four metal time-delay elements (No. 1, No. 3, No. 5, and No. 6) that have different thicknesses. Each is colour-coded.

The delay time for each metal strip depends on its thickness, as well as the ambient temperature. As an example, the No. 1 element (yellow colour-coded) has a delay of nine minutes, up to one hour and four minutes at a temperature of 20 degrees Centigrade. At the same temperature, the No. 6 element (colour-coded white) has a delay ranging from three hours and 30 minutes, up to 25 hours. When manufactured at the factory, a No. 6 element is installed in the firing device. The remaining three metal elements were packed in a paper bag and put into a case, along with the firing device.

MV-1 (MB-1)


Type - Delay

Weight - 1.6 oz. (46 g)

Length - 5.2 in. (133 mm)

Diameter - 0.3 in. (9 mm)

The MV-1 delay firing device resembles a skeleton-type door key. It consists of a metal tubular body with an internal thread at one end to enable inserting the initiation and detonation mechanisms. The other end has a plug. The detonator and booster charge are located at the bottom of the key assembly. The firing mechanism is directly above the detonator, and is held in the cocked

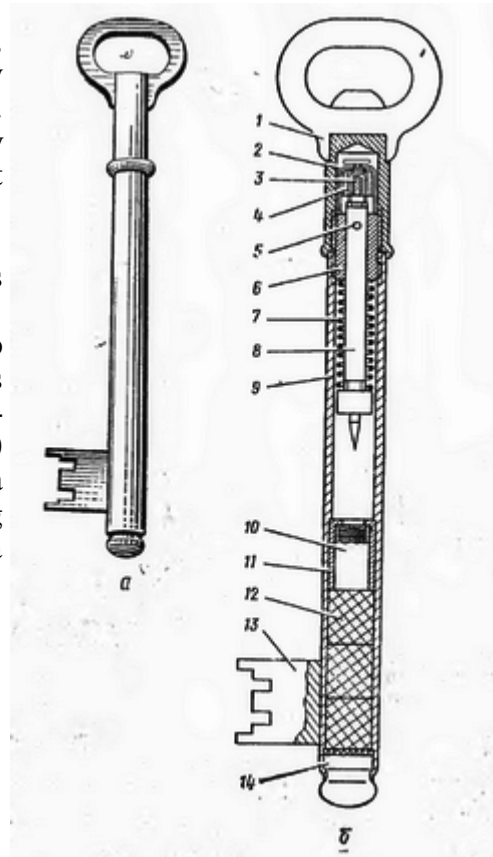

MV-1 internal diagram



MV-1 Firing Device


position by a cotter pin (positive safety) that passes through a hole in the striker rod.

MV-2 (MB-2)


Type - Delay

The MV-2 firing device has the configuration of a mechanical pencil. It consists of an octagonal metal body with female threads at both ends. On the outside of the body there are four longitudinal grooves containing the lead for the mechanical pencil. Inside the body there is an initiation assembly, as well as a sleeve containing an MG-8-T detonator and a booster charge. The initiation mechanism of the MV-2 differs from that of the MV-1, in that it has external threads at both ends for screwing the sleeve into the body and screwing a cap on top of it.

To use either the MV-1 or the MV-2, the firing device was inserted into a demolition charge and placed against the target. Then a positive safety pin was removed from the firing device that allowed the cutter assembly to shear the metal delay element. When that occurred, the striker assembly impinged the detonator that, in turn, initiated the booster charge, as well as the attached explosive charge.

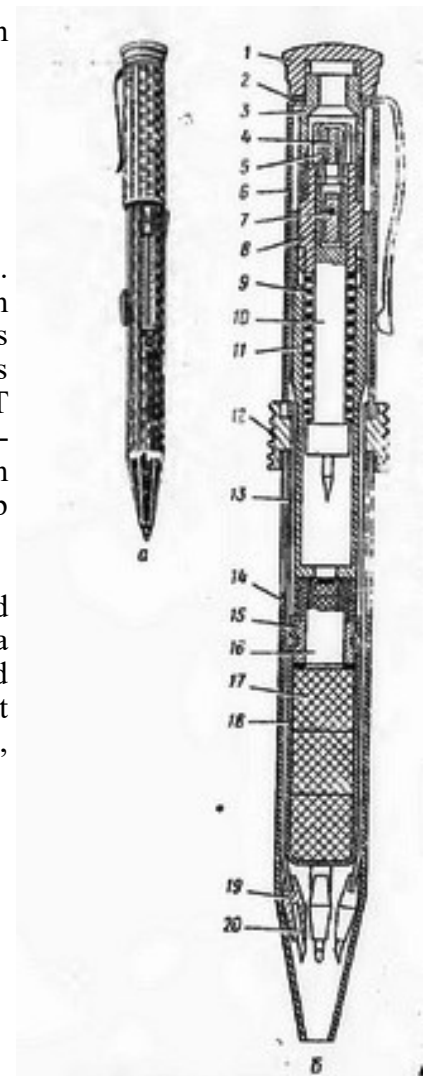

MV-2 Firing Device internal diagram

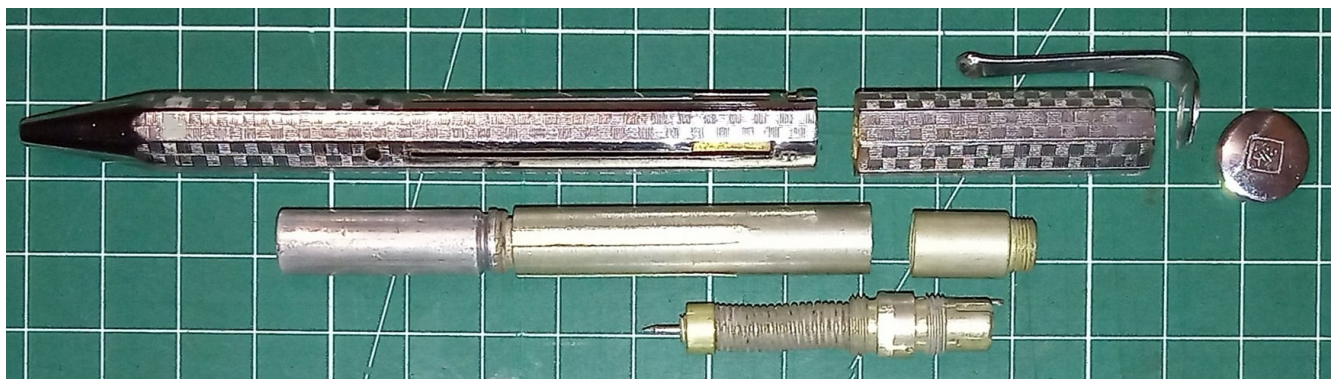

*MV-2 Firing device
Photo- Oleksandr Mariash*


MV-3 (MB-3)

Type - Delay

The MV-3 firing device is shaped like a fountain pen, with an internal thread and two longitudinal slots. A positive safety pin kept the cocked striker assembly in a safe position. A safety nut with a hole for the striker tip is located in the slots. When the outer tube rotates, the safety nut moves inside the housing along the slots down to the detonator. To make it look like a real fountain pen, it has a tip in which an ink dropper and a nib are affixed within a sleeve.

After inserting the firing device into a demolition charge, the positive safety pin is removed. The striker is held in the cocked position by a safety nut. When the outer tube (handle body) is rotated counterclockwise by 4–5 turns, the safety nut moves along the slots in the body until it stops in the sleeve aligned with the detonator, and frees the striker. At the same time, the cutter assembly, under the action of the mainspring, shears through the metal delay strip releasing the striker to hit the primer.

For training purposes, non-explosive variants of these firing devices were developed - the U-MV-1, U-MV-2, and U-MV-3. They differ from operational firing devices in that they do not have detonators, and wooden inserts are inserted in place of the booster charge. A white stripe is also painted on the body of the firing device.

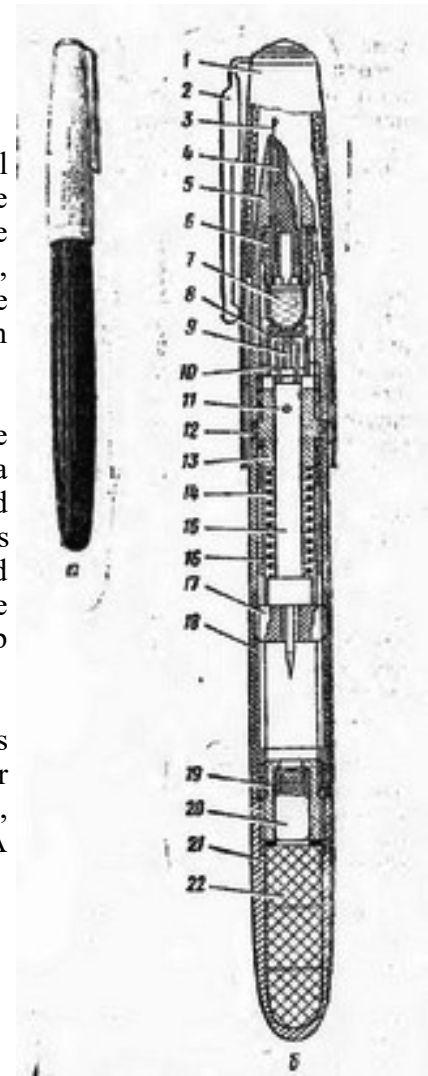

MV-3 Firing Device internal diagram

MV-3K (MB-3K)

Type – Delay

Weight – 0.8 oz. (23 g)

Length – 4.4 in. (112 mm)

Diameter – 0.4 in. (10 mm)



MV-3K Firing Device, note the protective caps at either end.

The MV-3K is a highly specialized mechanical delay firing device primarily intended for use in a select number of demolition charges, including the BM-7 high explosive-incendiary demolition charge. However, it can potentially be modified for use in improvised boobytraps.

The firing device consists of an elongated, T-shaped body. The body contains a dual, redundant initiation mechanism at each end to ensure reliability, and a detonator in the centre, protruding portion in the body. Inside each end of the MV-3K is a shear wire cutter assembly that contains a cocked striker assembly, and a lead alloy shear strip for the time delay required. Several shear strips, with varying hardness, are supplied with each firing device. Each striker is held in the cocked position by a safety pin.

To prepare the device for use, choose the appropriate delay strips and insert them. It is then attached to the emplaced demolition charge, and the protective safety caps at each end removed. The dual safety pins are then pulled, fully arming the firing device. This allows the striker spring to assert pressure bringing the shear wires in contact with the delay strips. Both shear wires slowly cut through the delay strips until they sever them. At that point, the strikers are free to be driven forward under pressure of the springs until they hit the percussion caps in the detonator assembly. The caps fire initiating the detonator causing the main charge to explode.

MV-5 (MB-5)

Type - Pressure

Weight - 0.7 oz. (20 g)

Length - 1.5 in. (43 mm)

Diameter - 0.5 in. (14.3 mm)


This is a simple, pressure operated device developed during WWII. It has been in service for many years in the former Soviet Union and other nations supplied by them. Normally used in mines it could also be employed in other explosive charges. The MV-5 has been copied by other countries such as East Germany (MW-5), Yugoslavia and China.

The fuze consists of a body, cap, striker, striker spring and striker retaining ball. The body is cylindrical and is threaded internally at the bottom to accept the detonator assembly. A hole in the side, about 2/3 the way up from the bottom is to accept the striker retaining ball. On the side of the body opposite the hole is a longitudinal groove. The cap is formed with one closed end. The cap is bulged out on the side about half way up. Opposite the bulge the body is punched in to form a guide on the inside. The striker is just wide enough to fit into the body and has a V shaped groove around the middle. A sharp pointed striker is fitted into the bottom centre. The striker spring is a short length of coil spring. The striker retaining ball is simply a small ball bearing. When fitted together the striker is inserted into the body with the groove lined up with the hole in the side of the body. The striker retaining ball fits into the hole preventing the striker from moving. The striker spring fits



*MV-5 Firing Device
With MD-5 Detonator
Photo- G. Zahaczewsky*

into the cap. When the cap is put over the body, the guide on the cap fits into the groove on the side of the body causing the bulge to line up with the hole and retaining ball but not at the same

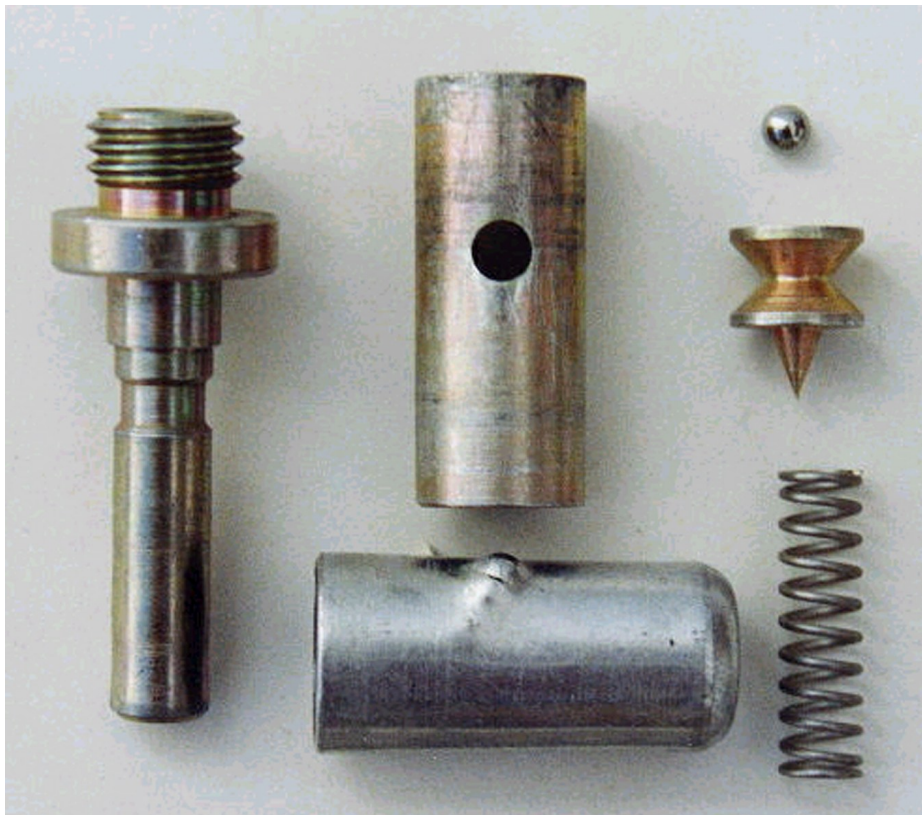

MV-5 Firing device disassembled, note the detonator assembly is a solid training version. Photo- Fenix Insight



MV-5 packaging dated 1961
Photo- Oleksandr Mariash

spring on the striker causes the V-shaped groove to force the retaining ball out into the bulge. Once it is out of the way, the striker is free to move under pressure from the striker spring. The striker hits the percussion cap in the detonator assembly which fires into the detonator.

MV-5K (MB-5K)

Type - Pressure
 Weight - 0.7 oz. (18 g)
 Length - 1.25 in. (32 mm)
 Diameter - 0.625 in. (16 mm)

The MV-5K is a plastic version of the MV-5 fuze. In construction and operation, it is identical with the exception of some minor points. The guide in the cap is a small screw that fits into a groove in the body. Any other differences are unknown at this time. An East German version (MW-5K) is known to exist.

level. The cap prevents the retaining ball from coming out of place. The striker spring is not under compression at this point. The detonator assembly, either the MD-2 or later MD-5 can then be screwed into the bottom. When used in antitank mines an MD or MD-6 detonator assembly is used. There is no safety pin.

When a pressure of at least 22 pounds (10 kg) is applied to the cap, it moves down compressing the striker spring. As it moves down, the bulge on the cap will eventually come into line with the retaining ball. The downward pressure from the



MV-5K Firing Device
(probably East German manufacture)

MVE-08 (MB3-08)

Type – Collapsing Circuit

Weight – 10.9 oz. (309 g)

Length – 3.4 in. (86 mm)

Diameter – 2.4 in. (61 mm)

The MVE-08 is an electro-mechanical firing device developed by the Russian Scientific Research and Engineering Institute around 2008. It is designed to be employed with existing Russian anti-personnel and signal mines, as well as any ordnance or demolition charge that will accept an MD-5M detonator. It is a successor to both the MVE-72 and MVE-92, as well as the overly complex MVE-NS. It reportedly has both a self-neutralization option, as well as a self-destruction feature.

The MVE-08 has a metal body that contains the electronic circuitry to arm and fire the device, as well as 175 yards (160 metres) of breakwire filament. The other end contains a receptacle for the MD-5M detonator, or the adapter for an electrical firing circuit closing device.



MVE-08 Firing Device

It is initiated by a collapsing circuit that uses a breakwire as the activation mechanism. Further technical and operational details of the MVE-08 are unknown.

MVE-72 (MB3-72)

Type – Collapsing Circuit
Weight – 21.1 oz. (600 g)
Height – 5.9 in. (150 mm)
Diameter – 2.5 in. (65 mm)

The MVE-72 was developed as an initiation and control unit for antipersonnel mines. However, it can also be used in a boobytrap configuration, as an anti-disturbance, or a collapsing circuit, firing device for external explosive charges. The firing device was produced by several Soviet and Russian installations, including the Joint Stock Company “Scientific Research Technological Institute, P.I. Snegireva,” and State Factory 583.

The device is constructed of metal and Bakelite. It consists of a cylindrical control unit (with an attached NM initiator), and a separate spool that contains 60 metres of fine, insulated, two-strand breakwire.

The control unit contains a 1.5 volt battery as a power source (KB-U-1.5), a friction-ignited pyrotechnic arming delay mechanism (approximately 50-80 second), an attached NM initiator (that accommodates an MD-5M detonator), an electronics circuit to function the device, and a receptacle to connect the breakwire.


To place the MVE-72 into operation, the cover is removed from the battery housing at the end of the control unit, and a battery inserted. The cover is then replaced. The control unit is emplaced in close proximity to the mine, or explosive charge. The jack on the breakwire spool is then plugged into the receptacle on top of the control unit. The wire is unspooled to cover the target area.

An MD-5M detonator is attached to the NM initiator and inserted into the mine or other explosive charge. Both the control unit and explosive charge (or mine) are then appropriately camouflaged. The final step is to extract the pull cord to ignite the pyrotechnic arming delay mechanism. After approximately 60 seconds, two contacts inside the control unit are fused together, thus completing the firing circuit. The firing device is now ready for use.

The MVE-72 will function if any of the following actions occurs: (1) if the breakwire is broken or flexed; or (2) if the breakwire is unplugged from the control unit. Either action will create a collapsing circuit, initiating the firing device. If the device has not functioned before battery life expiration, the firing device will self-neutralize/deactivate.



MVE-72 Firing Device
Photo– G. Zahaczewsky

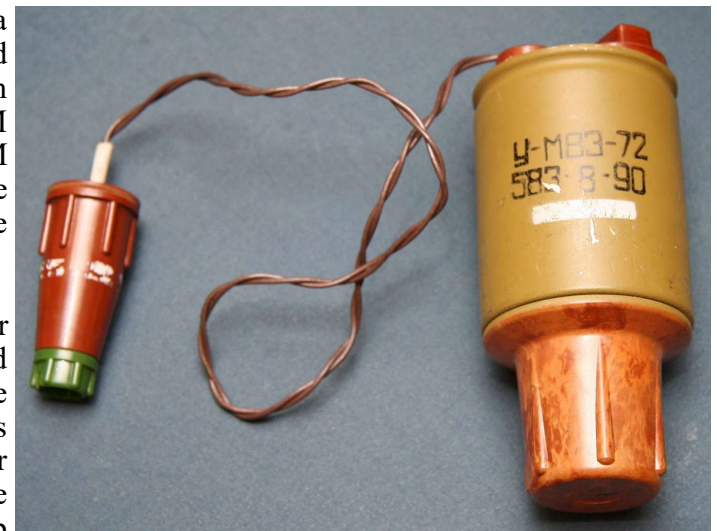

U-MVE-72 Training Firing Device

MVE-92 (MB3-92)

Type – Collapsing Circuit

Weight – 7.0 oz. (200 g)

Height – 3.4 in. (88 mm)

Diameter – 2.0 in. (52 mm)

The MVE-92 is a battery-powered, electronic firing device, incorporating a collapsing circuit. It uses a breakwire as the initiation mechanism. It was designed in the 1990's as a means of initiating a landmine or boobytrap. The firing device was produced by several Russian installations, including the Joint Stock Company "Scientific Research Technological Institute, P.I. Snegireva," and State Factory 582. It is a follow-on to the MVE-72 firing device.

The MVE-92 has a metal body containing the electronic circuitry to arm and fire the device, a battery, as well as 80 metres of breakwire filament wound around the body at the top. The other end contains a receptacle for an MD-5M detonator, or an adapter for an electrical firing circuit closure device. The firing device can also be screwed directly onto the detonator assembly of certain mines, such as the Russian OZM-72 antipersonnel mine.

The first step in using it is to activate the battery utilizing a special tool provided with each device. The next step is to install, or insert, the firing device into a mine or explosive charge.

To arm the device, the red-flagged safety pin is then removed. After 20-60 minutes, the device is ready to function. Once armed, tripping or running over the breakwire snaps it, collapsing the circuit forcing the current to be diverted to the initiator causing it to function and detonate the attached munition. The MVE-92 can remain active for 30 days.



MVE-92 Firing Device

MVE-NS (MBЭ-HC)

Type – Multifunction

Weight – 8.8 oz. (250 g)

Length – 3.5 in. (90 mm) (control box/power unit, initiator/activating unit)

Width – 2.2 in. (56 mm) (control box/power unit);
1.2 in. (31 mm) (initiator/activating unit diameter)

Height – 0.9 in. (control box/power unit)

The MVE-NS is primarily intended as an electronic anti-handling device for antipersonnel mines, such as the Russian OZM-72, the MON-50, and the MON-90. It entered service in the 1980's and was employed by Soviet forces in Afghanistan. There is no practical use for the device as a stand-alone boobytrap, as it does not incorporate an integral explosive charge. When used in a boobytrap configuration, it is most frequently employed as an anti-disturbance, or a collapsing circuit, firing device for external explosive charges. It does incorporate a self-destruct feature of 25 to 90 days, which is determined by battery life – when the power drops below 6.8 volts (+/- 1.5 volts), the firing device will self-destruct.

The device is constructed of polyethylene plastic, and consists of a square control box connected by a two-lead wire to an oval activation unit, which will accept either an MD-2 or MD-5M non-electric detonator.

The control box contains a 7RTs53U battery as a power source, a time delay arming mechanism (that is factory preset for either 7.5 or 30 minutes, and has the delay embossed on the outside of the control box), 40-metres of breakwire filament (used to establish a collapsing circuit) on a spool under a



removable cover, a breakwire target sensor, and an electronics circuit that controls both arming and firing. The activation unit contains a firing mechanism to initiate the detonator assembly, as well as the electronics circuit to function the device if it is moved or the connection to the control box is broken.

To place the MVE-NS into operation, remove the cover from the battery housing at one end of the control box, and insert a battery. Replace the cover. Open the cover at the opposite end of the control box and remove the spool of breakwire. Up to 40 metres of breakwire can be placed around the device and its associated explosive charge. Screw a detonator assembly into the adapter at the end of

MVE-NS Firing Device

the activation unit and insert the detonator assembly into the mine or explosive charge. The firing device is now ready for use.

Pulling the red-cloth arming tab removes it from the control box and initiates the arming delay. An LED at the end of the control box will begin flashing, and will continue through two-thirds of the arming delay time (4.6 minutes or 13.3 minutes). At the end of the delay time, the condenser in the electronic circuit is fully charged, and the device is armed.

The firing device will function if any one of the following actions occurs: (1) if the breakwire is broken; (2) if the firing device is moved and, in doing so, the breakwire is stressed; (3) if the wires connecting the control box to the activating unit are cut or broken, or the power source is removed; and (4) if the power source level falls below 6.5 volts, thus initiating the self-destruct feature.

MY-8 (МЙ-8)

Type – Delay

Weight – 0.6 oz. (18 g)

Length – 4.2 in. (108 mm)

Diameter – 0.3 in. (8 mm)

The MY-8 is a chemical delay firing device, often referred to as a chemical or time pencil. Little is known about this device but, it was most likely developed during the Second World War from a British device, and is no longer in service. In appearance, it is similar to the British “Switch No. 10 Delay Mk. I”, but it also shares some of the same characteristics of the Former Yugoslav “UDVK chemical delay firing device”. It is unknown whether the MY-8 is used with an incendiary charge, an explosive detonator, a safety fuse holder or possibly all of them.

Although little information exists regarding the MY-8, it appears to be constructed in the same manner as the other chemical time delay pencils mentioned above. Specifically, the copper end of the cylindrical body contains a glass vial filled with a corrosive liquid and absorbent material. Attached to this copper segment of the firing device is another brass section containing a cocked striker assembly that is held in place by a retaining wire. There is a safety strip between the striker assembly and the other end, which contains an adapter for the attachment of either an incendiary charge, an explosive detonator, or a safety fuse holder. It is likely that this device was made with a variety of delays which would be indicated by the colour of the safety strip.

To use the MY-8, remove it from its plastic shipping and storage container. Attach the appropriate adapter for the charge being used. Emplace the MY-8 and attached charge against the target, and withdraw the safety strip. The final step is to crush the copper tubing surrounding the glass vial. The corrosive liquid will flow down into the absorbent material and begin weakening the wire restraining the cocked striker assembly. Once the corrosive liquid eats away at the retaining wire, the device will function.



MY-8 Firing Device with carrying case

MZD-21 (МЗД-21)

Type – Anti-disturbance


Weight – 10.2 oz. (290 g)

Length – 3.4 in. (87.5 mm)

Width – 2.3 in. (58.5 mm)

Height – 0.8 in. (22.5 mm)


Referred to as a delayed-action mine by Russian sources, the MZD-21 is a self-contained demolition charge intended to be used as a boobytrap. It is a limpet-type explosive charge utilizing a magnet so that it can destroy vehicles in motion. The mine casing contains 0.7 oz. (20 g) of A-IX-1 (95% RDX) explosive, as well as a power source and a fragmentation plate.

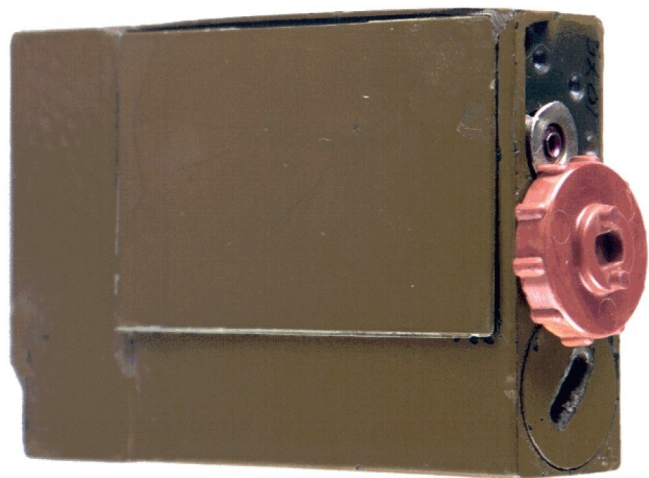

MZD-21 demolition charge

The MZD-21 has three operational modes - "OBJECT," "TRANSPORT," and "TRAP." When preparing the device for use as a demolition charge, the selector is moved to the "OBJECT" position. A firing delay of one to 120 hours is selected and the device goes through a self-check and arming sequence. After an arming delay of approximately 14.5 minutes, the MZD-21 is fully armed and will detonate if an attempt is made to disarm it, such as disrupting the power source. In the "TRANSPORT" mode, a firing delay is also selected, and the device will detonate if it senses movement at the expiration of the firing delay. In the "TRAP" mode, the firing device will function if moved or tilted after the expiration of the arming delay.

МИНА МЗД-21

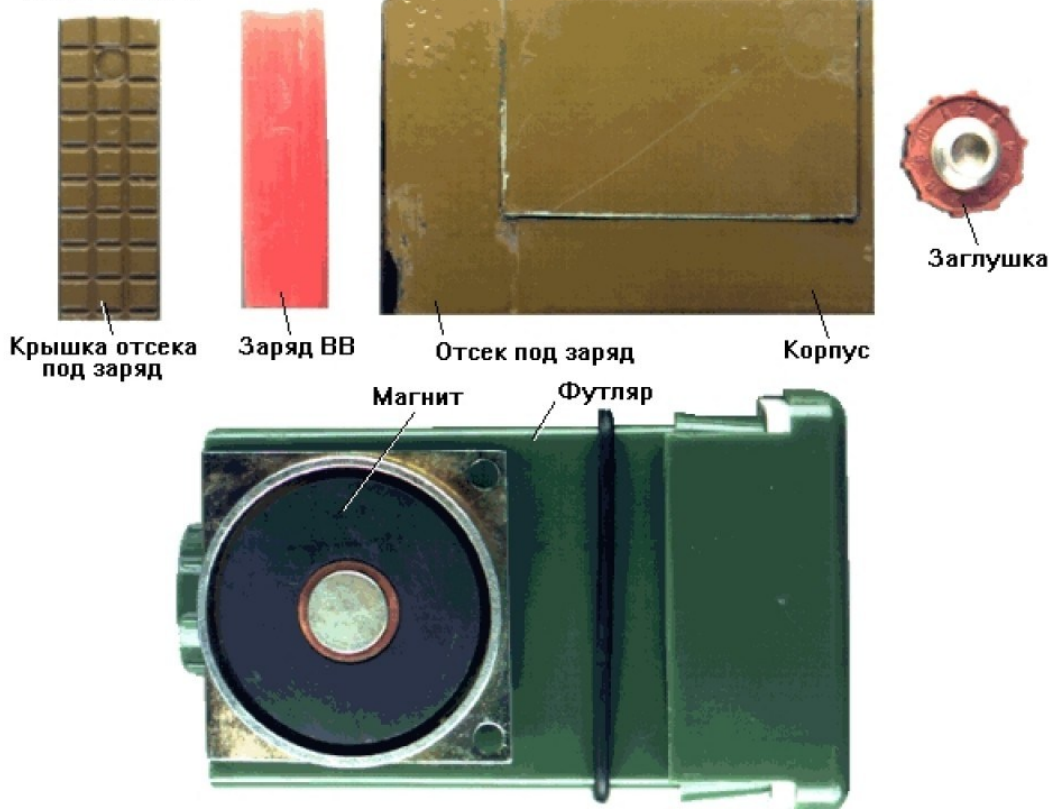

MZD-21 demolition charge components

MZU (M3Y) and MZU-S (M3Y-C)

Type – Multifunction

Weight – 42 lb. (19 kg)

Diameter – 7.8 in. (200 mm)

Height – 18 in. (453 mm)

The MZU is a multifunction demolition charge originally intended as an anti-train/anti-vehicle mine for use against railways and highways. The device functions on either vibration, magnetic influence, command initiation or anti-handling. The MZU-S is a modified version incorporating a larger explosive charge, 35 pounds (16 kg). These firing devices and components were produced by several Soviet and Russian organizations including the Joint Stock Company “Scientific Research Engineering Institute (AO NIII)” and State Factories 60, 107 and 583. The MZU series of firing devices have been encountered in Afghanistan.

The charge consists of three major components: an upper fuze assembly (VMZU), a lower explosive charge (MZU) and a remote control and testing unit (PU-MZU).

The lower explosive charge assembly is a tubular sheet steel casing with its top and bottom sealed with steel closure plates. The upper closure plate incorporates a central threaded fuze well. A handle is attached to the side of the tube. The charge contains 26 lbs. (12 kg) of TNT.



MZU Demolition Charge

The VMZU fuze assembly screws into the well on top of the charge. The fuze incorporates the following initiation options: delay (1-60 days), vibration, magnetic influence, command initiation and anti-handling. When the anti-handling option is set, a small spring-loaded plunger beneath the lid causes detonation of its 0.8-ounce (25 g) Tetryl booster if the lid is removed.

The threaded portion of the fuze has the same threading as the TM-57 mine. The mine and fuze can be combined if desired.

The PU-MZU remote control and testing device is connected to the fuze assembly with a jack plug and is powered by three replaceable batteries. The device is used for remote control, testing and command detonation of the device.

Although the MZU has a limited battery life, a non-functional device should never be approached if there is any possibility it is still active.


The device is painted olive green and has markings on the side giving the designation, manufacturer, lot number and year of manufacture.

Anti-Transport Mine MZU


Employment

Preparing the VMZU fuse for installation

1. Make sure that the VMZU "MANUAL CONTROL" handle is in the "OFF" position and check using the control unit. In accordance with the "MANUAL CONTROL" section of the instructions, that the VMZU is in the "OFF" position.
2. Remove the VMZU from the housing, unscrew the non-removable screw, prepare the PU according to the instructions, connect the PU to the VMZ with a test cable, set the handles of the switches "DAY SLOWDOWN" and "TYPE OF WORK" in accordance with the task.
3. In the set position of the switches, check the VMZU using the control unit, according to the section of the instructions "CHECKING THE VMZU", while - or knock on the VMZU body for 3-5 seconds (if the switch is in the "Povad" position); - or swing the VMZU around the horizontal axis (if the switch is in the "Auto" position) - or move the "TYPE OF WORK" switch from the "AUTO" position to the "OBJECT" position.
4. Disable the check signal from the VMZU and PU.
5. Insert the EHL and ECP cells into the corresponding VMZU sockets and close the shutters, insert element 373 under the threaded cover of the "ELEMENT" socket.
6. Screw in the anti-trigger screw if the task requires installing the mine in an untargeted position.
7. Install the VMZU into the housing and close the locks.


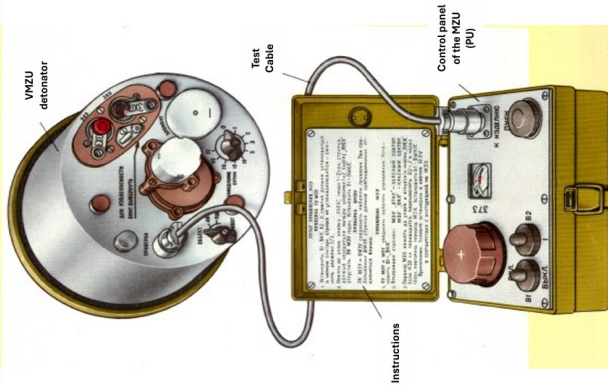


Mina MZU. 3-part series. 2 planets on 1 set.
Order of the Red Banner of Labor. Military Publishing House of the USSR Ministry of Defense.
Publ. No. 800 p. Moscow 1984.

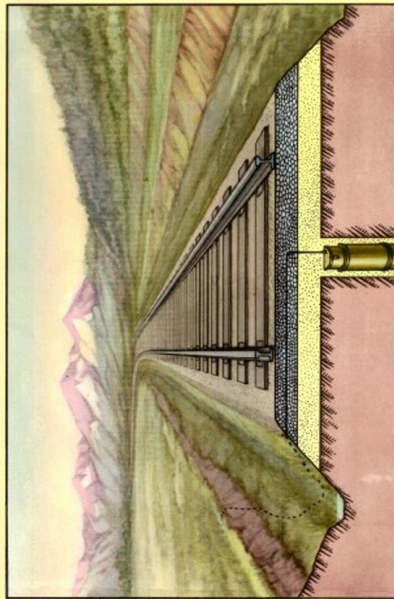

Mine installation

1. Dig a pit of the required depth, with a diameter of at least 0.2 m (or prepare a place on the site).
2. Connect the VMZU with the control cable to the control unit. Using the control unit, make sure that the VMZU is in the "OTNL" position and disconnect the control cable from the control unit.
3. Screw the plug into the control cable socket
4. Screw the VMZU into the charge.
5. Remove the seal from the VMZU handle and turn it to the "VNL" position.
6. Install the mine in the pit (on the object), stretch the control cable to its full length, carefully mask the installation location of the mine and cable.
7. Unscrew the plug on the control board, connect the socket to the control panel and, in accordance with the section of the instructions "CONTROLLING THE MZU", move the mine to the "on" position.
8. Disconnect the control cable from the control panel.
9. Carefully mask the control panel.
10. For ease of installation of the mine in deep pits, a nylon tape is used, which is attached to the mine kit.

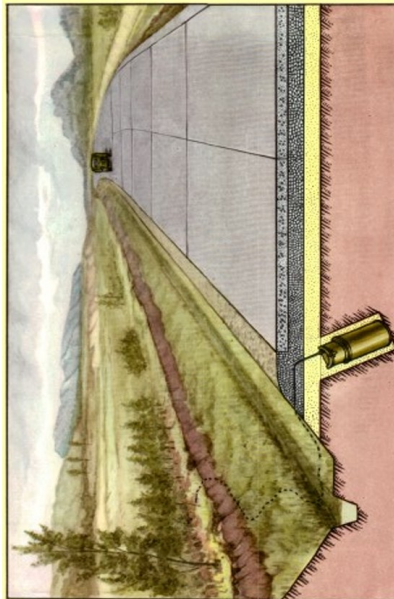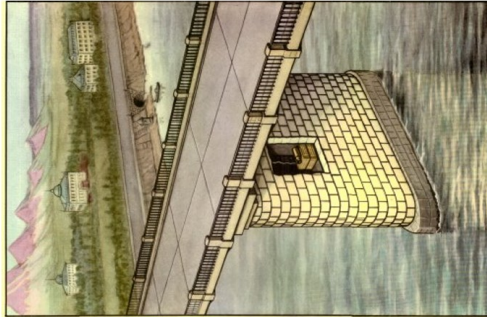

PROHIBITED

1. Place the mine in the "AUTO" position closer than 200 m from active industrial power lines, electrified railways, and radar stations.
2. Use the control panel to move the mine to the "OFF" position if less than 30% of the set deceleration time remains.
3. Place mines closer than 30 m from each other in the "AUTO" position and 200 m in the "TRAIN" position.
4. Defuse the mine if it cannot be switched to the "OFF" position using the control unit.
5. Approach a mine in the "AUTO" or "TRAIN" position closer than 7 meters after the deceleration time has expired and before the control panel switches it to the "OFF" position.

Removal

1. Connect the control panel to the control panel socket and turn the switch to the "OFF" position according to the "CONTROL OF THE MZU" section of the instructions.
2. Dig the mine up to the cover and turn the "MANUAL CONTROL" handle to the "OFF" position.
3. Remove the mine and disconnect the explosive device from the charge.
4. Remove the VMZ from the housing and remove the EHL, ECP cells and element 373, insert the VMZ into the norms, close the locks.

MZU-2 (M3Y-2)

Type – Multifunction

Weight – 24.6 oz. (700 g)

Length – 7.5 in. (193 mm)

Width – 4.5 in. (116 mm)

Height – 1.2 in. (32 mm)

The MZU-2 is a complex firing device that was developed by the Scientific Engineering Institute in Balashikha, Russia (State Factory 582) on the outskirts of Moscow in the mid 1970's. Other manufacturers could also include the Joint Stock Company "Scientific Research Engineering Institute (AO NIII)." It was originally intended as an anti-train (anti-vehicle) mine, but it is well suited for use as an emplaced demolition charge, an antihandling device for antitank mines, or a boobytrap, due to its small size and explosive charge. The device functions on either seismic vibration, movement, remote-control, or time delay when employing the VZD-144Ch firing device. In addition to the vibration sensor, there are also two separate movement sensors – an inclined sensor that functions when it is tilted more than 10 degrees or moved faster than 0.05 m/s, and dual inclined sensors that trigger the firing device if it changes position by more than 10 degrees, regardless of its original orientation. The MZU-2 is sometimes referred to as the Берёза ("Willow")



MZU-2 Firing Device

The device consists of a main body, an explosive charge contained in a removable cover, two removable batteries, and an MD-5M detonator assembly. The top has a control panel containing a safety device with a removable seal, a start button covered by a removable cap, a firing mode selector switch ("Emplaced," "Train," or "Boobytrap"), and an electrical connection for remote arming or detonation.

Prior to use, the explosive cover is removed from the bottom, and a 1.5V battery installed in each of the compartments on either side of the main body. A 5.3 oz. (150 g) block of Tetryl is placed into the removable container, and an MD-5M detonator assembly is inserted into the Tetryl block. On the underside of the control panel is a breakaway wire that is removed to disable the inclination sensors, if desired. Leaving the wire in place will activate these anti-handling features once the MZU-2 arms. The explosive-laden cover is then reattached to the main body of the firing device and secured with spring catches on either side of the main body. The device is now ready to be programmed for use and emplacement.

When using the MZU-2 as an emplaced charge, the device is normally attached to a larger explosive charge suitable for the task at hand. It can be placed in any desired orientation. In this situation, it functions as a fuze/detonator for the larger charge. To prepare it for use, the mode selector is set to the "Emplaced" position. If a timed detonation delay is desired, the cover from the start button is removed and a VZD-144Ch firing device is screwed into place. Upon expiration of the time delay, the firing device functions pushing down on the start button initiating the MZU-2 and detonating the attached charge. The VZD-144Ch can also be used to set an arming delay for the MZU-2 when it is connected for remote-control initiation. (Of note. If the VZD-144Ch is not installed, then the cap must be removed from the start button releasing it into the open position thereby allowing arming and detonation of the firing device to take place.) The last step requires removal of the seal from the safety device, which then arms the device after 60-70 seconds. If the breakaway wire was not removed, then

any disturbance of an armed firing device once it has been emplaced, will result in a detonation.

When employed as an anti-train mine, the MZU-2 must be emplaced in a horizontal position. In this particular application, the device would be attached to a larger explosive charge and would function as the detonator for that charge. To prepare it for use, the mode selector is set to the "Train" position. The firing device is triggered by a vibration sensor that detects a train travelling between 30 and 160 km/h at a distance of 35 metres. Additionally, if the inclination sensors were not disabled during preparation, the device will detonate if tilted or moved.

Emplacing the MZU-2 as a boobytrap requires the mode selector to be moved to the "Trap" position. The breakaway wire is not removed thus enabling the movement sensors. The boobytrapped item, or landmine, is placed on top of the firing device and the seal removed from the safety device. The device will be armed after 60-70 seconds. If desired, the VZD-144Ch time delay firing device, and/or the remote-control initiation cable can also be connected.



Крышка (cover); Пружинная защелка (spring catches); Обойма с источником тока (power supply); Заряд (charge); Запал МД-5М (fuze MD-5M); Паз корпуса (body groove); Накольный механизм (inclination mechanism); Обрывная петля неизвлекаемости (breakaway wire)

NVU-P (HBY-II) and NVU-PM (HBY-IIIM)

Type – Seismic

Weight – 9.2 lbs. (4.2 kg)

Diameter – 6.1 in. (155 mm)

Height – 14.2 in. (362 mm)

The NVU-P is a seismic minefield control system, developed by the Soviet Union in the 1970's. The firing device is nicknamed "Oxota," which translates to "The Hunt." When emplaced it can initiate up to five antipersonnel mines. It can also employ a self-destruct charge that will detonate at the end of battery life (~90 days). It utilizes a VP-12 electronics package. The NVU-PM is a modification of the firing device incorporating a VP-13 electronics package. Otherwise, these firing devices are externally identical. They have been found in Afghanistan, Chechnya, and Ukraine. One of the manufacturers has been Kazan Precision Machinery.




NVU-P Firing Device



NVU-P Geophone

The NVU-P consists of a metal cylinder containing batteries and a VP-12 electronics unit. The top of the firing device contains: five firing wires to which mines can be attached (normally OZM-72 bounding fragmentation types, but other types can be used); one electrical connection with an SV-20-P geophone attachment; a threaded adapter to which an arming device can be attached; and a pair of black wires that can be used to connect a self-destruct charge, or another NVU-P unit. There is also a red light to indicate that the device is turned on and in the process of arming.

Prior to emplacing it, six 1.5-volt dry cell batteries (Type 373, R20) are installed, and the geophone is connected to the top of the firing device. The selected arming device – either an MUV-4 mechanical delay firing device, or an EKhV-7 electro-chemical delay firing device – is threaded onto the adapter on top of the device. The two black wires are connected to an EDPr detonator or an NM initiator with an MD-5M, and inserted into a seven-ounce (200 g) block of TNT, which is taped to the side of the body in a white rectangular painted area. The geophone is then pushed into the ground until it is flush with the surface. The NVU-P is buried, or

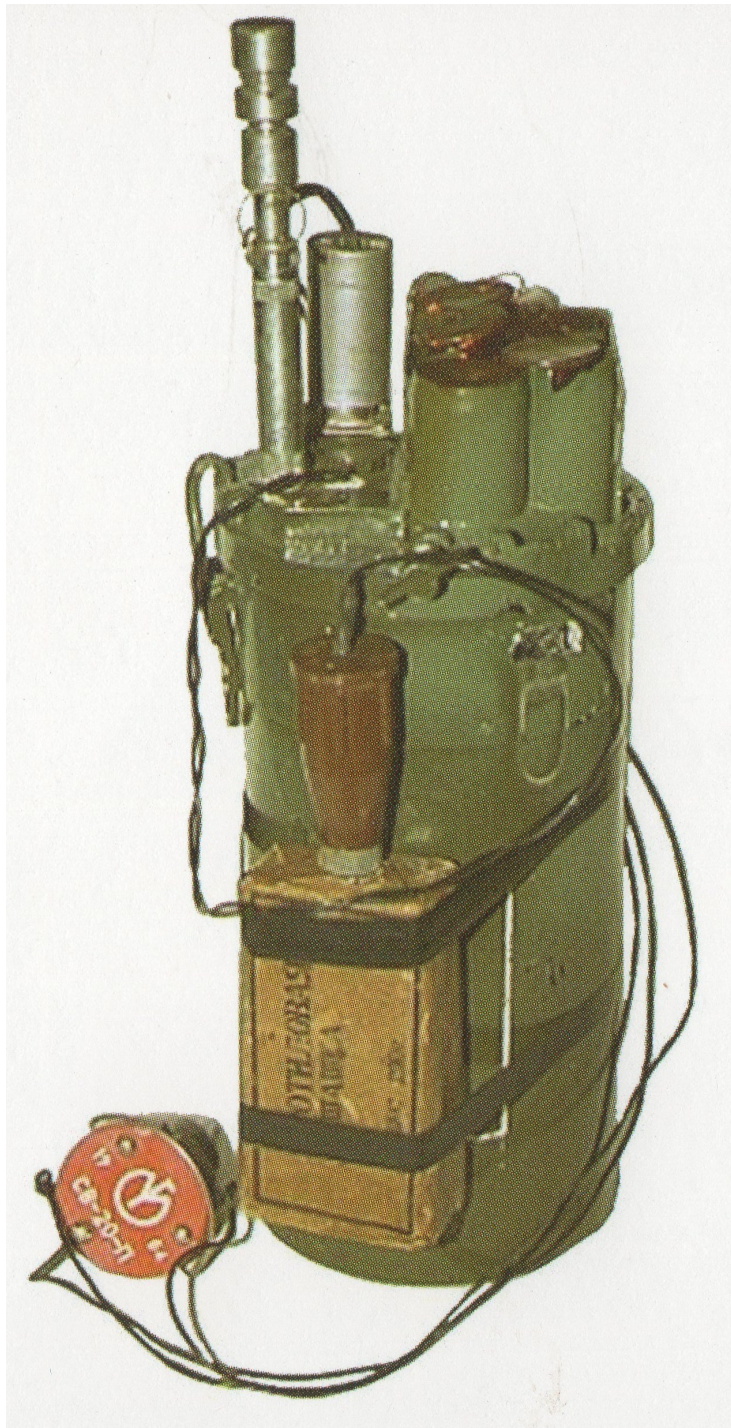

hidden close by. The firing wires are run out and connected to five mines that cover the target area. The final step is to remove the safety pins from the arming device, and leave the area. The geophone can detect ground vibrations within a 15 metre radius. Once the device determines the vibrations are footsteps, the control unit selects the mine that is closest to the target and sends a firing pulse to that mine. Any further activity will cause the second mine to fire, and so on for the third, fourth, and fifth mine.

VP13 note the attached demolition charge and MUV-4 firing device.

NVU-P2 (HBY-II2)

Type – Seismic

Weight – approximately 4.5 lbs. (2 kg) (sensor/fuze unit and remote-control/test set only)

Length – 7.8 in. (198 mm) sensor/fuze unit; 7.7 in. (198 mm) remote-control/test set

Width – 4.3 in. (109 mm) sensor/fuze unit; 5.5 in. (140 mm) (remote-control/test set)

Height – 2.4 in. (61 mm) sensor/fuze unit; 3.9 in. (99 mm) remote-control/test set



*NVU-P2 Firing System
Photo- D.Mokrushin*

The NVU-P2 is a seismically activated, remotely (or autonomously) controlled, minefield control system that can, according to Russian sources, activate up to four “engineering munitions or prepared demolition charges.” The “engineering munitions” include the OZM-72 and POB bounding antipersonnel fragmentation mines. The system is intended to seismically detect a “walking or crawling” soldier, or up to ten combatants, within a radius of approximately 50 metres. The system also has a programmable self-destruct time. The NVU-P2 appears to be an updated version, and successor to, the NVU-P and NVU-PM minefield control systems. The firing device is nicknamed “Oxota 2,” which means “The Hunt 2.” It is reported to have entered Russian service in 2014.

The outer casing of the sensor/fuze unit, as well as the remote-control/test set, appear to be of a green, plastic material. The cable reel itself appears to be of a plastic and metal construction. The construction of the components appear to indicate that the device was not intended for long-term exposure to the elements.

The NVU-P2 consists of five major components (along with associated attachments) – a sensor/fuze

unit, a detachable seismic sensor (“floor device”), a remote control/test set, a 100-metre reel of firing wire, and four IM (or VUZ) initiators. Additional reels (up to 400 metres) may be added to the system, along with a PD-440 “executive device,” that ostensibly provides the remote-control function.

The NVU-P2 can supposedly activate one connected explosive device at the end of 400 metres of control wire, or four explosive charges at the end of 100 metres of firing wire. As previously mentioned, the firing device is capable of being employed in a remote-controlled, or an autonomous mode. These options are selected by a two-man team of operators, who are responsible for testing, emplacing, and arming the system.

If employed autonomously, the system can be programmed to self-destruct if a target does not appear in the detection range of the NVU-P2 for a set period (7, 14, or 28 days). Reportedly, this is accomplished through the detonation of the connected explosive charges (or munitions), and the fusing of system electrical components.

In the remote-controlled mode, when the "Target" light flashes, accompanied also by an audible signal, the operator presses the "Start" button, selects the appropriate munition, and detonates it.

To employ the system, one operator attaches the seismic probe to the fuze/sensor unit, and then prepares to emplace it. The other team member calculates the best method of employment utilizing the system’s ancillary components. Once that has been accomplished, the team buries the mines or prepared demolition charges, connects the charges to the fuze/sensor unit and conceals it, and then selects either the remote-controlled or autonomous method of operation. When arming the installed fuze/sensor unit by withdrawing the red-tagged safety pin, a red-light flashes on the remote control/test set for 80 seconds. This is the approximate time that it takes to charge the device’s capacitors. The system will be fully armed in three minutes.

The NVU-P2 becomes non-functional in three situations: (1) after detonating all four munitions, (2) after the expiration of the self-destruct time in the autonomous mode, (3) after depletion of the battery power supply.

PV-42 (IIB-42)

Type - Pressure

Weight - 4.4 oz. (125 g)

Length - 3.7 in. (74 mm)

Width - 1.2 in. (36 mm)


Height - 0.7 in. (20 mm)

The PV-42 appears to be a copy of the British "Switch, No. 5, Pressure, Mk. I". In Russian service it is specifically used as a railway sabotage device although it could certainly be used for other purposes. The device is virtually identical to the British device but has been modified to use the Russian detonator assemblies. In addition, the extension rod is substantially different to the British version.

The PV-42 consists of a steel case with a hinged steel lid fitting inside the case. The lid has a centre threaded hole to screw an extension into. A body is fixed inside the case by a countersunk bolt.



PV-42 Firing Device

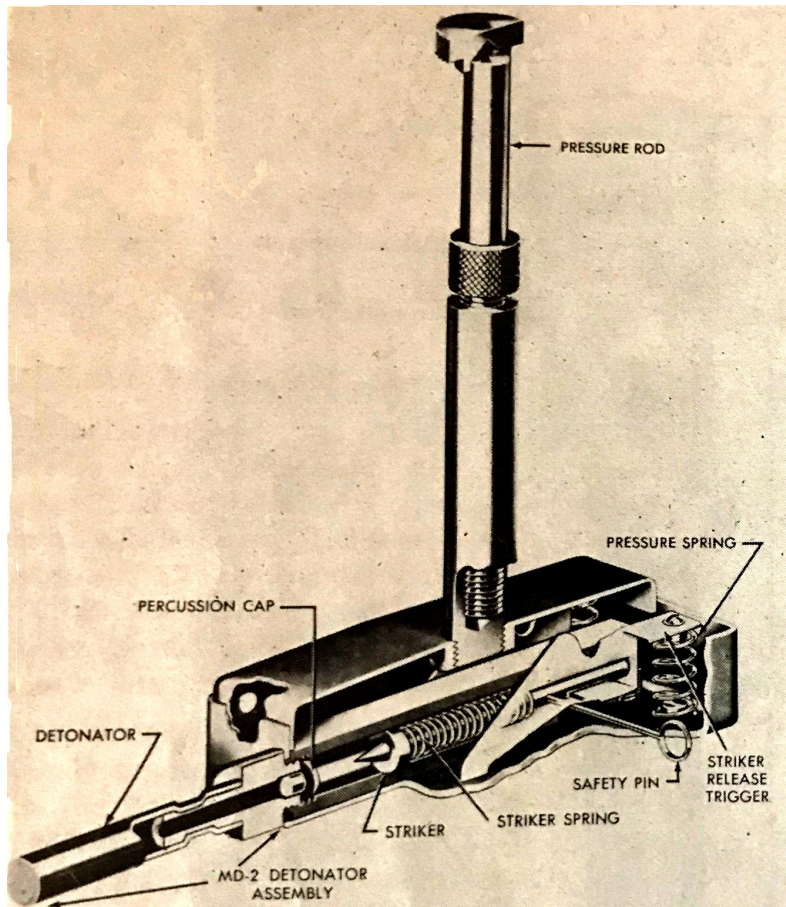

Internal Diagram of the PV-42 Firing Device

The end of the body is threaded to accept an MD-2 or the later MD-5M detonator assembly. Two studs on the bottom of the case keep the sear springs in position. The striker is formed with a shoulder and firing pin on one end and a detent on the other. The sear is formed of steel and has two studs riveted on to correspond with the studs on the case to retain the sear springs. The pressure points on the sear project up on either side of the body. A safety pin passes through the case, body, and striker to ensure the device will not fire when it is in position.

An extension rod assembly is made in two parts, a socket that screws into the top of the lid and a rod that screws into the socket. The rod has a knurled nut at the bottom end and a flat head that screws onto the top. The extension provides a height adjustment up to 4 inches (101 mm) and is adjustable in height by varying the amount that the rod is screwed into the socket. If a shorter extension is required, the socket may be used without the rod.

When the device is assembled, the striker and striker spring are inserted in the end of the body with the detent facing down. The striker is pressed back until the detent engages the sear and holds the striker in the cocked position. The safety pin is then passed through the holes in the side of the body to make the device safe.

The pressure necessary to operate the device varies from about 24 - 40 lbs (11 - 18 kg). dependent upon where on the lid the pressure is applied. When pressure is applied to the switch the lid presses down on the sear. As the sear is pressed down it disengages from the detent allowing the striker to fly forward under pressure of the striker spring. The firing pin hits the percussion cap and fires the charge.

PVU-79 (ИВУ-79)

Type – Pressure

Weight – 8.8 oz. (250 g)

Length – 1.6 in. (41 mm) piezo fuze assembly

Diameter – 1.4 in. (36 mm) actuator rod assembly;

1.1 in. (28 mm) piezo fuze assembly

Height – 5.7 in. (147 mm) actuator rod assembly



PVU-79 Firing Device

The PVU-79 firing device is intended to destroy railroad tracks and derail trains. It is an improved version, and successor to, older PV and PZ-series devices, such as the PV-42 or PZ-12, that were used in the 1940's and 50's.

Much of the PVU-79 appears to be manufactured from a Bakelite-type material. The actuator rod appears to be metal. The device consists of an actuator rod assembly, a piezo-electric fuze assembly, two initiators and a housing that also serves as a base assembly for the device.

In preparation for use, the entire assembly is emplaced under a train rail. The spring-driven actuating rod is extended until it stops against the bottom of the rail. MD-5M detonators are screwed into the two initiators and then inserted into explosive charges that are placed against the rails, or against the ties holding the rails in place. The firing device, initiators and explosive charges are then concealed and camouflaged, as much as possible, using surrounding material. Finally, the red-flagged safety is

removed.

In operation, when the first pair of train wheels passes over a train rail, the rail flexes and presses down on the actuator rod. In the base of the actuator rod, there is a piezo-electric fuze assembly. When stressed, the piezo fuze produces an electrical current that is passed to the initiators. The initiators are electro-mechanical devices that drive a firing pin/striker assembly into the primer of an MD-5M detonator. The detonator, in turn, initiates the attached explosive charges, destroying whatever target they are attached to.



PZ-12 (ПЗ-12)

Type - Pressure

Diameter - Main section 1.5 in. (38 mm)


Height - 9 in. (229 mm)

This firing device was developed prior to 1940 mainly for mining sections of railroad tracks.

It consists of a brass plunger with a plunger head mounted into a brass base containing a spring. The base is mounted on a metal plate. The plunger has a safety pin located near the top and a second one where the plunger enters the base piece. A contact rod at 90 degrees to the plunger is attached to the plunger through a slot in the base piece. One electrical contact is attached to the base piece. The second contact is attached to a spring clip mounted in such a manner that the contact rod will engage it when the plunger moves downward. There is no other information available regarding the construction of the device.

For use, a hole about 10 inches (250 mm) deep must be dug under a rail or tie. An 8 x 12-inch (200 x 300 mm) board is placed in the bottom of the hole. Place the device on the board so that the head of the plunger is nearly flush with the bottom of the rail or tie. Connect the device into an electrical firing circuit. A delay clock may be wired in to provide an arming delay. Removing the safety pins completes the arming of the device.


When a train passes over the device it will cause the rail or tie to flex somewhat. This will push down on the plunger until the contact rod slides into the spring clip and completes the electrical firing circuit. The firing device may be contained within a wooden box to ensure that dirt cannot interfere with the operation of the device.

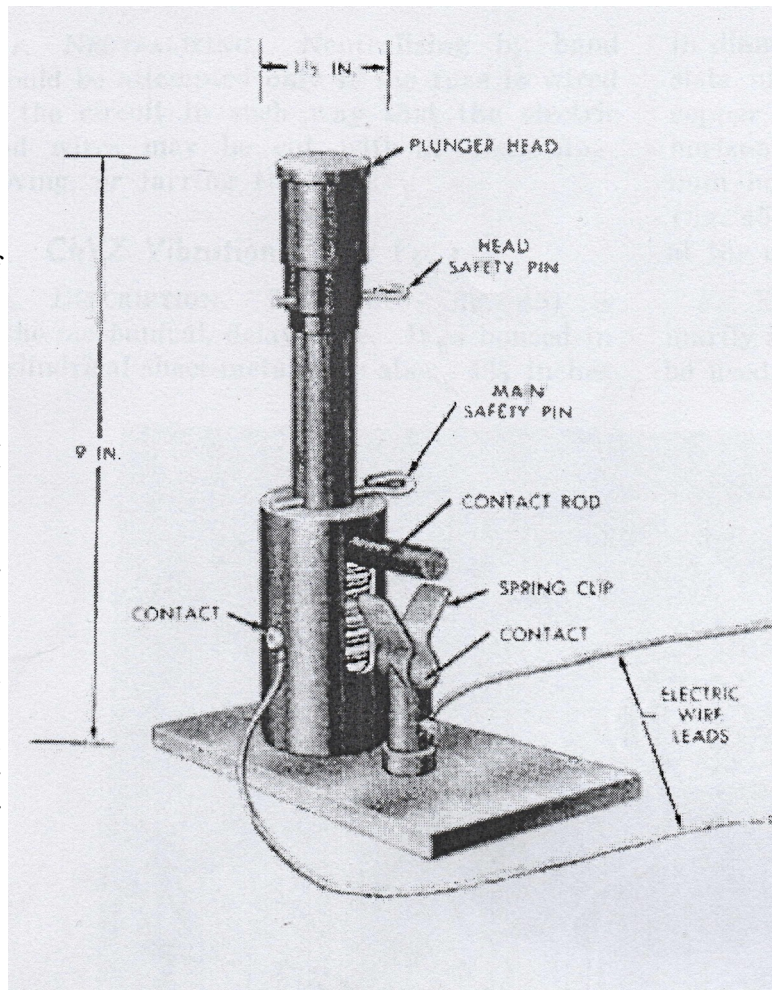

SM-12 (CM-12)

Type – Frequency Induction
Weight – 2.5 lbs. (1.13 kg)
Diameter – 6.7 in. (171 mm)
Height – 3.7 in. (95 mm)


The SM-12 was an instantaneous, electrically initiated, frequency induction firing device designed by the Russians in World War II. The German Armed Forces modified and refined the device after capturing several samples before the end of the war. The firing device was intended as a boobytrap to explode a mine, or demolition charge, when it detected the signal from an electronic mine detector.

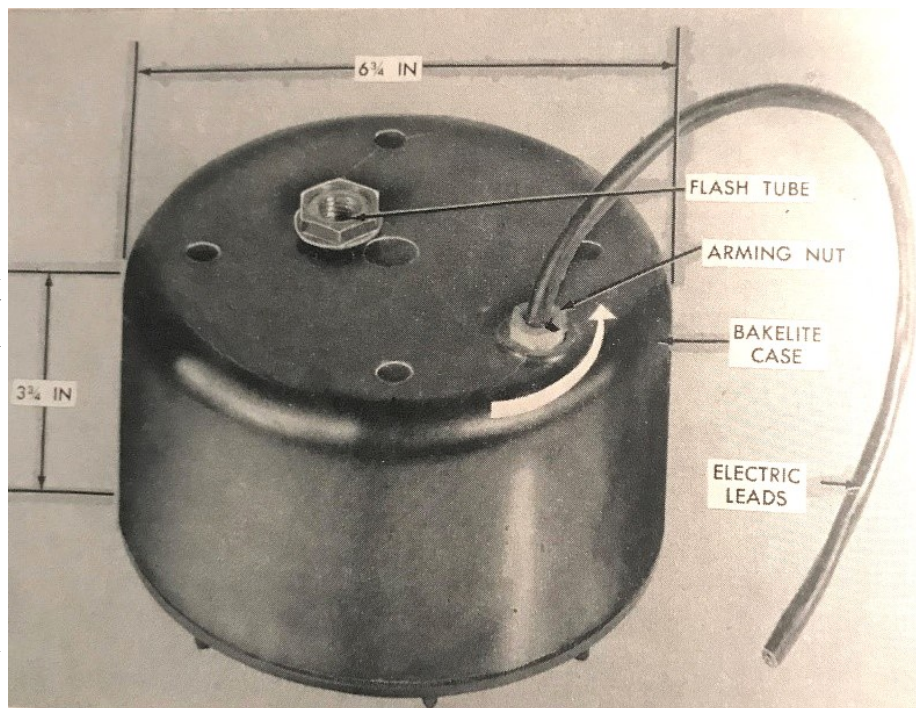

SM-12 Firing Device

Two models of the SM-12 were manufactured – an early one with an oval, black, laminated wood case, and a later one with a cylindrical, brown Bakelite body. The firing devices contained sponge-rubber mounted components that were screwed to the case body. A flash tube passed through the firing device, with openings at the top and bottom of the assembly. An arming nut – surrounding the leads of the firing wire - was positioned on the top of the device, with a white arrow indicating the direction to turn the screw to arm the SM-12. The internal components of the firing device included: sensitive relays, dry-disc rectifiers, pickup coils, condensers, resistors, leaf-type arming switches, delay arming switches, and 1.5-volt batteries.

The firing device was employed by connecting its firing wire to a detonator, which was then inserted into the mine or demolition charge. The arming nut on top of the device was turned in the direction indicated by the white arrow. This action completed a circuit that initiated an arming delay of 1.5 to 2 hours. After the expiration of the delay, the SM-12 was fully armed and would detonate when it detected the pulses of an electronic mine detector.

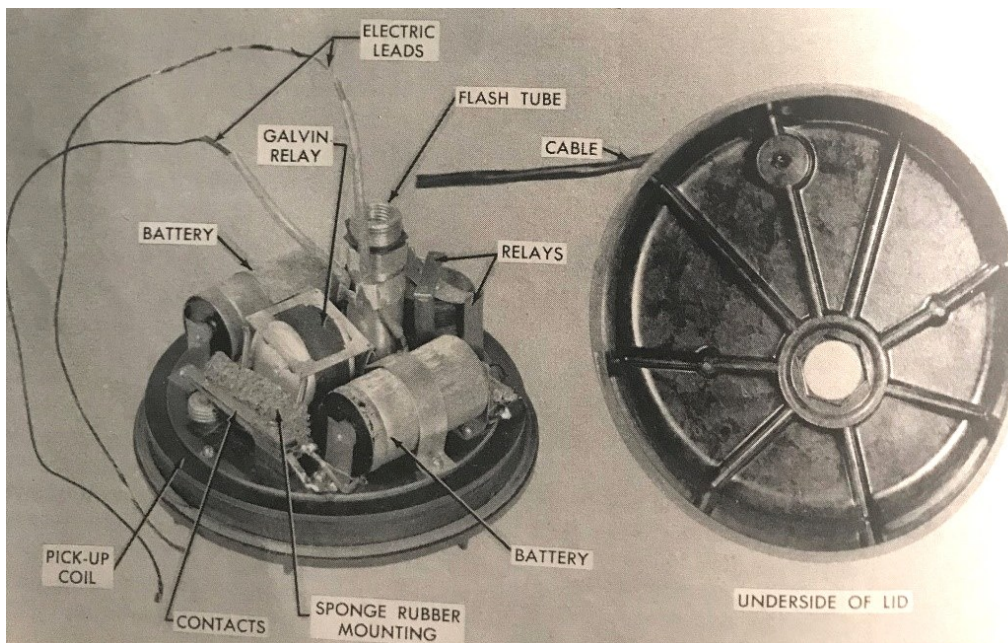

SM-12 with cover removed

SVPPM (CBIIIIM)

Type – Seismic

Weight – 3.8 lbs. (1.75 kg)

Diameter – 2.9 in. (75 mm) - VPPM; 2.7 in. (70mm) - NDC-S

Height – 4.2 in. (108 mm) - VPPM; 3.5 in. (90 mm) - NDC-S

The SVPPM is a two-part firing device used with a wide variety of mines and demolition charges. It consists of a VPPM control unit and an NDC-S seismic sensor. Both devices require batteries and can remain active for up to 30 days. Neither component contains any energetic material. An electric detonator (blasting cap) must be attached to the control unit. A self-destruct time can be programmed into the firing device that ranges from a half day and up to 27 days.

The SVPPM has two operational modes - “MINE” and “CHARGE.” When preparing the firing device for use, one of the two modes is selected in the VPPM control unit. In the “MINE” mode, which requires selecting a self-destruct time, the SVPPM will operate when the NDC-S seismic sensor detects a target within its (15 m) operational range. In the “CHARGE” mode, the firing device will function at the end of a pre-selected arming time (.5 to 24 hours).

Of particular note is that any attempt to disarm or move the SVPPM will result in a detonation of the attached mine or explosive charge.



VPPM electronic control unit



NDC-S sensor unit

VP-04 (BII-04)

Type – Seismic

The VP-04 is an earlier version of the NVU-P series of seismic minefield control systems. It was developed by the Soviet Union prior to 1980 to autonomously detonate antipersonnel mines, such as the OZM-72 and the MON-50. Little is known about this device, except that it has been encountered in Afghanistan, Angola, Mozambique, and Zimbabwe.

It consists of a cylindrical metal body with a Bakelite top. Wires protruding from the top of the device connect a geophone, a signal processing device, and several firing leads. Any other information is currently unknown.



*VP-04 Firing Device
Photo- G. Zahaczewsky*



*VP-04 Firing Device showing geophone and signal processing device.
Photo– C. King*

VPF (ВПФ)

Type - Pull

Weight - 0.8 oz. (25 g)

Length - 3.1 in. (80 mm)

Diameter - 0.4 in. (12 mm)

The VPF firing device was developed and produced by Russian State Factory 583 during WWII and was used for many years after. It is now obsolete. It could be employed in both anti-personnel mines, as well as boobytraps.

The device is made entirely of metal and consists of a body, striker, striker spring, striker retaining clamp, safety pin and detonator assembly. The body is cylindrical with the top section reduced slightly in diameter. The bottom is internally threaded to accept the detonator assembly. The top has an elongated hole to fit the safety pin. A thin strip of sheet metal with fixing eyes at either end is soldered around the centre of the body. The striker has a ball shaped top and the bottom end has a head just smaller than the interior diameter of the body with the striker point in the centre. A hole through the shaft allows the safety pin to fit through. The striker spring fits between the bottom end of the striker and the reduced section of the body. The striker is held in the cocked position by the safety pin. The striker retaining clamp is cylindrical and has four flexible prongs. The prongs are separated by key shaped slots with the bottom of the prongs formed to fit slightly inside the top of the body. A pull ring is fitted through the top of the clamp. The detonator assembly can be either the MD-2 or later MD-5.

When assembled the striker and striker spring are inserted through the bottom of the fuze and pushed up until the safety pin can be fitted through the body and striker. At this point the ball shaped end of the striker protrudes from the top of the body. The striker retaining clamp fits over the top of the ball. The detonator assembly screws into the bottom of the body.

For use, it is assembled and inserted into an explosive charge or mine. When the safety pin is removed, the striker retaining clamp holds the striker in the cocked position. It is prevented from releasing the striker by the bottom of the clamp fitting slightly into the top of the body. An axial pull of about 9 pounds (4 kg) or a lateral pull of about 3 pounds (1.4 kg) on the pull ring will allow the clamp to release the striker. The compressed striker spring will reassert itself and drive the striker down to hit the percussion cap in the detonator assembly.



*VPF Firing Device
Photo— G. Zahaczewsky*

VPZ-1 (БПЗ-1) and VZLS (БЗЛС)

Type – Concussion

Weight – 33.5 oz. (950 g)

Diameter – 2.6 in. (68 mm)

Height – 5.1 in. (130 mm)

This is a concussion-initiated firing device that was introduced into Soviet service prior to 1980. It is used primarily for underwater demolitions, and is technically not a boobytrap (i.e., victim-initiated), but does qualify for special treatment or consideration if encountered. The VPZ-1 would normally be employed in a Russian SZ-6 (or similar) underwater demolition charge that is emplaced with several other

demolition charges, one of which would be equipped with either a time delay or command-initiated firing device. When that charge is detonated, all the adjacent charges equipped with the VPZ-1 (or VZLS) firing device would be sympathetically detonated. As a corollary concern, any VPZ-1 or VZLS demolition charge in close proximity to any underwater detonation will explode, regardless of the time delay on the initiation charge.




VPZ-1 Firing Device
Photo- G. Zahaczewsky



VZLS on left, VPZ-1 on right

The firing device has a metal body and incorporates a lead shear wire arming delay mechanism similar to that in the PMN series of landmines, and later versions of the MUV series of fuzes. The Russian version comes complete with three different arming delay strips. The East German version (WPZ-1) has four arming delay strips – red, gold, blue, and black. The device is initiated when the shock wave from a nearby explosion impacts the rubber diaphragm in the upper part of the VPZ-1. The VPZ-1 contains a 0.9 oz. (26 g) Tetryl detonator. It is similar in appearance to the Russian VZLS firing device, which is also concussion initiated.

To place the VPZ-1 into operation, the screw-on cover from the arming delay mechanism is unscrewed, and the appropriate time delay lead strip inserted into the cutting mechanism. The cap is then

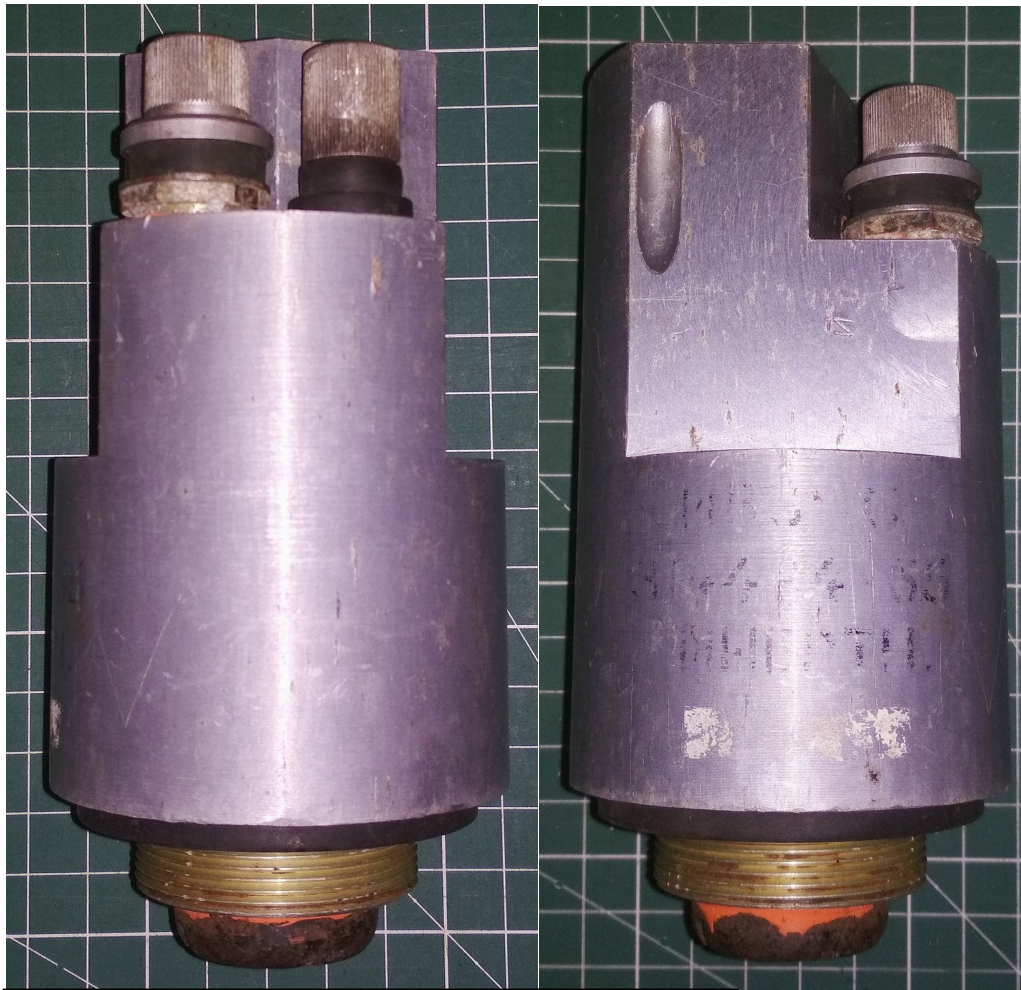

screwed back on. The firing device is then screwed into the demolition charge and the charge emplaced against the target. Once this has been done, the safety pin is withdrawn, freeing up the safety plunger and initiating the arming delay. Once the arming delay has expired, the device will overcome the safety plunger and initiate the integral detonator and booster charge when it senses an acoustic wave against the rubber diaphragm in the top part of the fuze. In turn, this detonates the attached explosive charge.

*Above- Side views of VZLS
Right- Top of VZLS showing diaphragm
Photos- Oleksandr Mariash*



VUZ-2 (BY3-2)

Type - Impulse Generator

Weight - 28.2 oz. (800 g)

Diameter - 5.1 in. (132 mm)

Height - 5.7 in. (145 mm)

This is an electrical impulse generator used to initiate two separate charges. It is used in conjunction with a VZD delay device or with an MUV series pull fuze. The MUV-2, 3 or 4 can be used as a delay or as a command detonated device using a long wire to pull the release pin. The VUZ-2 was produced by State Factory 144.


The generator capsule is cylindrical and made of Bakelite and metal. The Bakelite section contains a piezoelectric element, pyrotechnic charge and primer at the top. The top is closed by a transit cap screwed on that is replaced by the firing device when set. Wires protrude out the bottom leading to two electronic triggering devices. The triggering devices are connected to the generator by 10 metres of wire contained in cardboard sleeves. A detachable contact consisting of a block and tip are also attached to the wire, one end to each of the wires. The detachable contact



VUZ-2 Firing Device



VUZ-2 Generator Capsule

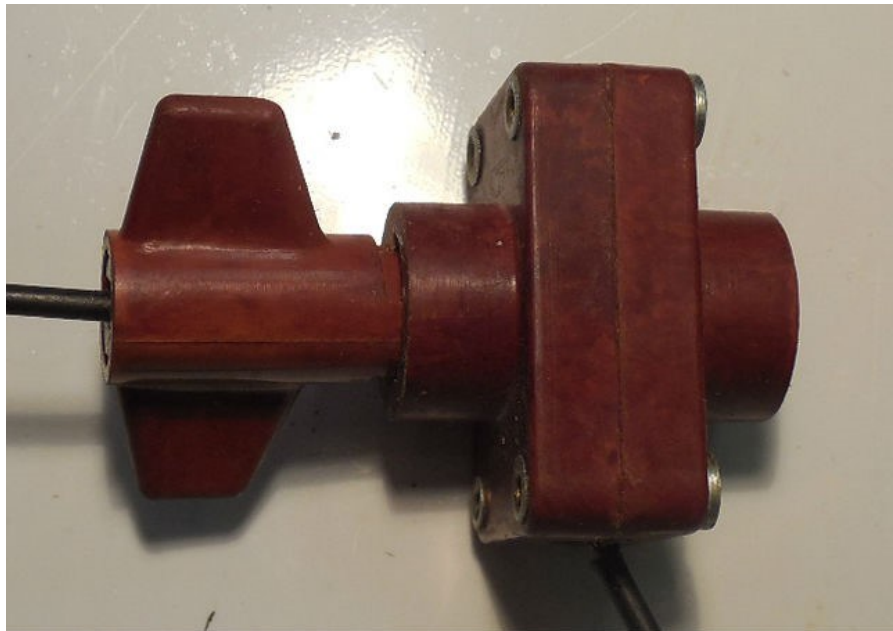

VUZ-2 Detachable Contact

breaks the electrical circuit while the device is in storage. The triggering devices are internally threaded to accept an MD-5M detonator assembly.

The device is marked on the metal portion of the generator capsule with the designation, manufacturer, lot number and year of manufacture.

For use, the generator is fixed at the firing site and the triggering devices stretched out to the charges. MD-5M detonators are screwed onto the triggering devices and inserted in the charges. The firing device is set and screwed onto the generator. The detachable contact is then connected.

When the firing device operates it fires the primer in the generator which fires the pyrotechnic charge. The gases formed within the generator press on the piezoelectric element causing it to generate an electric charge. The electric charge is passed down the wire to the triggering devices which then fire the MD-5M detonators and thus the main charges.

VUZ-4 (BY3-4)

Type - Impulse Generator
Weight - 28.2 oz. (880 g)
Length - 5.7 in. (145 mm)
Width - 5.8 in. (132mm)
Height - 1.9 in. (50 mm)



VUZ-4 Firing Device

The VUZ-4 is an impulse generator intended to initiate up to four separate explosive charges. It can be cascaded to initiate more than four charges. It is used in conjunction with a delay firing device normally of the VZD series; however MUV-2, 3 or 4 devices may also be used in the delay mode. It can also be initiated by a blasting machine if necessary. The VUZ-4 was produced by State Factory 144.

The device is mostly constructed from Bakelite. It consists of a base, with an attached electrical generator in the centre and four electrical ignition assemblies. In transit it is covered by a plastic cover held on by a thumb screw that screws into a bushing on top of the generator. The bushing also secures a bracket holding all the pieces together. The generator contains a primer, pyrotechnic charge and piezoelectric element. The ignition assemblies have 20 metres of fine copper wire and an electrically fired striker. Each of the ignition assemblies will fire an MD-5M detonator assembly.

When the firing device is initiated, it causes the generator primer to fire into the pyrotechnic charge. The gases formed by the charge press on the piezoelectric element causing it to produce an electric charge that is passed down the wires to the ignition assemblies. The ignition assemblies then fire the MD-5M detonator assemblies.

For use, determine an installation site within 20 metres of the charges to be fired. Remove the thumb screw and cover. Remove the bushing and bracket. Take the ignition assemblies out and fix the generator at the installation site. Take the ignition assemblies one at a time and lay the wires out to the charges ensuring the wires are not broken in the process. Screw the MD-5M detonator assemblies

into the ignition assemblies and connect them to the charges. Finally, install the firing device onto the generator. Once activated the firing device will initiate detonation of the four attached charges.

The device may also be used in a cascade if more than four charges are involved. To operate in a cascade one of the ignition assemblies from the first VUZ-4 is screwed onto the generator of the second VUZ-4. If more are required then the process is simply repeated with the second device. There is no limit to the number that can be connected. In this way the functioning of the first VUZ-4 will cause the functioning of all subsequent devices.

If it is to be fired with a blasting machine, one of the ignition assemblies is cut off and the wires insulated to prevent a short circuit. The ignition assembly is then wired to the blasting machine and screwed onto the generator. When the blasting machine is functioned, it causes the ignition assembly to fire the generator and initiate the device.



VUZ-4 Firing Device showing the ignition assemblies

VUZ-8 (BY3-8)

Type - Impulse Generator

Weight - 60 oz. (1.7 kg)

Diameter - 4.3 in. (120 mm)

Height - 5.7 in. (145 mm)

The VUZ-8 is similar in purpose to the VUZ-2 and VUZ-4 in that it is designed to simultaneously detonate a group of explosive charges using delayed action devices or blasting machines. The VUZ-8 will detonate up to 8 charges. It can also be cascaded (linked) if there are more than 8 charges. The device may be used underwater up to a depth of 10 metres. The VUZ-8 was produced by State Factory 144.

The device consists of a pulse generator, eight electronic ignition assemblies and a cylindrical casing. Most of the device appears to be made of Bakelite, while the outer casing seems to be sheet metal. The outer casing is held onto the base with a thumb screw and is sealed against moisture. The generator is mounted in the centre of the base, the ignition assemblies surround the generator and are held in place by a sheet metal bracket. The bracket is held on by a bushing that screws onto the generator. The generator housing has a bushing at the top containing a primer at the top with a pyrotechnic charge immediately below that. The housing itself contains an annular permanent magnet, an induction coil, an armature with a rod and a contact device. A nylon tape is wound around the upper generator housing and is used to tie the generator in place. The electronic ignition assemblies are used to fire MD-5M detonator assemblies. The ignition assemblies each contain 20 metres of wire. While in storage the generator is shunted by a wire that passes through the bushing holding the bracket on. When the bushing is removed the wire breaks allowing the generator to operate normally.



VUZ-8 Firing Device

The generator housing has a bushing at the top containing a primer at the top with a pyrotechnic charge immediately below that. The housing itself contains an annular permanent magnet, an induction coil, an armature with a rod and a contact device. A nylon tape is wound around the upper generator housing and is used to tie the generator in place. The electronic ignition assemblies are used to fire MD-5M detonator assemblies. The ignition assemblies each contain 20 metres of wire. While in storage the generator is shunted by a wire that passes through the bushing holding the bracket on. When the bushing is removed the wire breaks allowing the generator to operate normally.

When the delay device is triggered, it causes the primer to fire into the pyrotechnic charge. The gases formed push on the armature rod. The lower end of the rod closes the contact device connecting the ignition assemblies to the induction coil. With further movement it pushes on the anchor. When the armature moves it opens the magnetic circuit in the annular magnet causing a sharp change in the magnetic flux. As a result, an electromagnetic field is induced in the induction coil causing an electric charge to pass down the wires to the ignition assemblies. The ignition assemblies fire the detonator assemblies which causes detonation of the attached charges.

For use determine an installation site within 20 metres of the charges to be fired. Remove the thumb screw and casing. Remove the bushing and bracket. Take the ignition assemblies out and fix the generator using the attached tape at the installation site. Take the ignition assemblies one at a time and lay the wires out to the charges ensuring the wires are not broken in the process. Screw the MD-5M detonator assemblies into the ignition assemblies and connect them to the charges. Finally install the firing device onto the generator. Once activated the firing device will initiate detonation of the eight attached charges.

The device may also be used in a cascade if more than eight charges are involved. To operate in a

cascade one of the ignition assemblies from the first VUZ-8 is screwed onto the generator of the second VUZ-8. If more are required then the process is simply repeated with the next device. There is no limit to the number that can be connected. In this way the functioning of the first VUZ-8 will cause the functioning of all subsequent devices.

If it is to be fired with a blasting machine, one of the ignition assemblies is cut off and the wires insulated to prevent a short circuit. The ignition assembly is then wired to the blasting machine and screwed onto the generator. When the blasting machine is functioned, it causes the ignition assembly to fire the generator and initiate the device.




VUZ-8 with cover removed

VZ-1 (B3-1)

Type - Vibration
Diameter - 3 in. (76 mm)
Height - 1.2 in. (32 mm)


The VZ-1 is a simple device designed to operate by vibration to close an electrical circuit. Designed during the Second World War it is unlikely to still be in service due to its construction material. It was originally intended for use with some MZD delayed-action mines as well as a boobytrap.

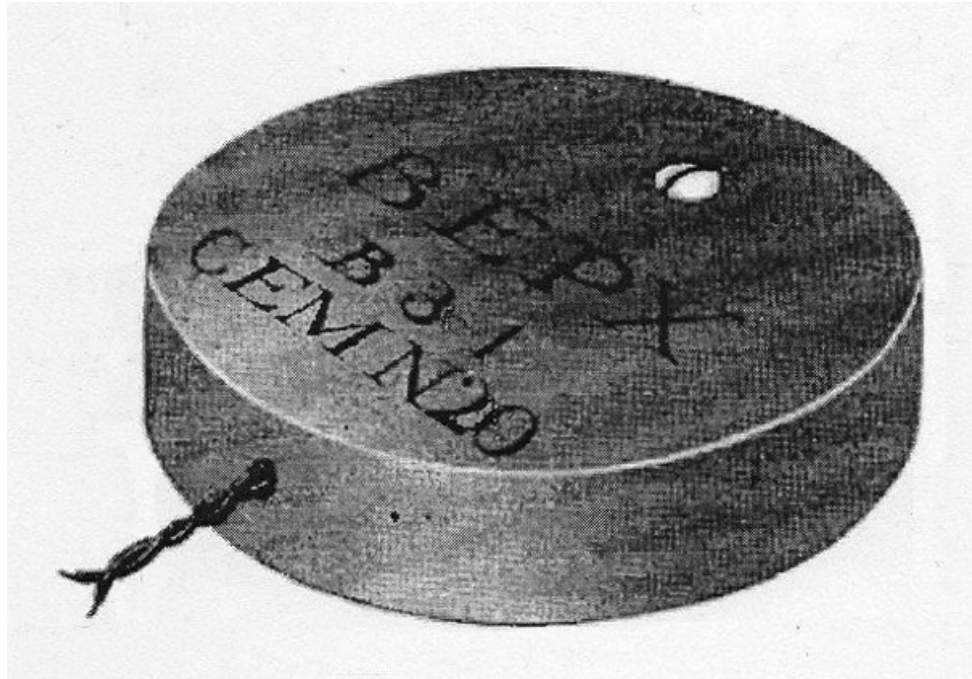

VZ-1 Firing Device

The firing device consists of a circular cardboard casing containing a thick hollowed out rubber disc. A “Y” shaped vibrator is suspended in the centre of the disc by three fine spiral springs attached to the junctions of the legs of the “Y”. The lead wires enter the device through the side of the casing. A contact screw is attached to one of the electrical leads and is screwed into the top of the casing so that it protrudes into the centre but does not contact the vibrator. The other lead is attached to one of the springs. There is no safety device.

The fuze is stenciled on the top with the word “BEPX” (TOP), the designation “B3-1” (VZ-1), and a manufacturers marking.

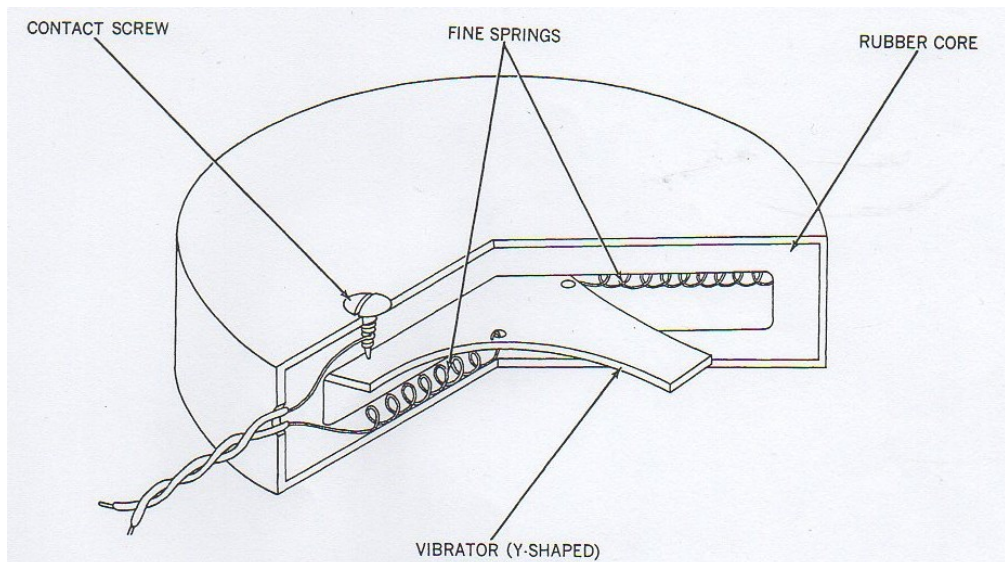

VZ-1 Internal diagram

When laid, the device is attached through the leads to a battery and an electrical detonator inserted into the charge. When nearby movement causes the device to vibrate, the vibrator comes into contact with the contact screw completing the circuit causing the detonator to fire and detonate the charge.

VZD-1M (B3Д-1M)


Type - Delay

Weight - 2.0 oz. (58 g)

Length - 6.4 in. (164 mm)

Diameter - 1.2 in. (32 mm)

This VZD-1M is primarily intended as a fuze for the Russian BPM, MPM, SPM, and UPM limpet mines. However, it can be readily adapted for use with other demolition charges, such as the KZU and MKZ series. It utilizes a metal fatigue delay system similar to that used in PMN mines. Dependent upon which of the six lead shear strips is used, the firing device is capable of firing delays of 15 minutes to 370 hours. These delays

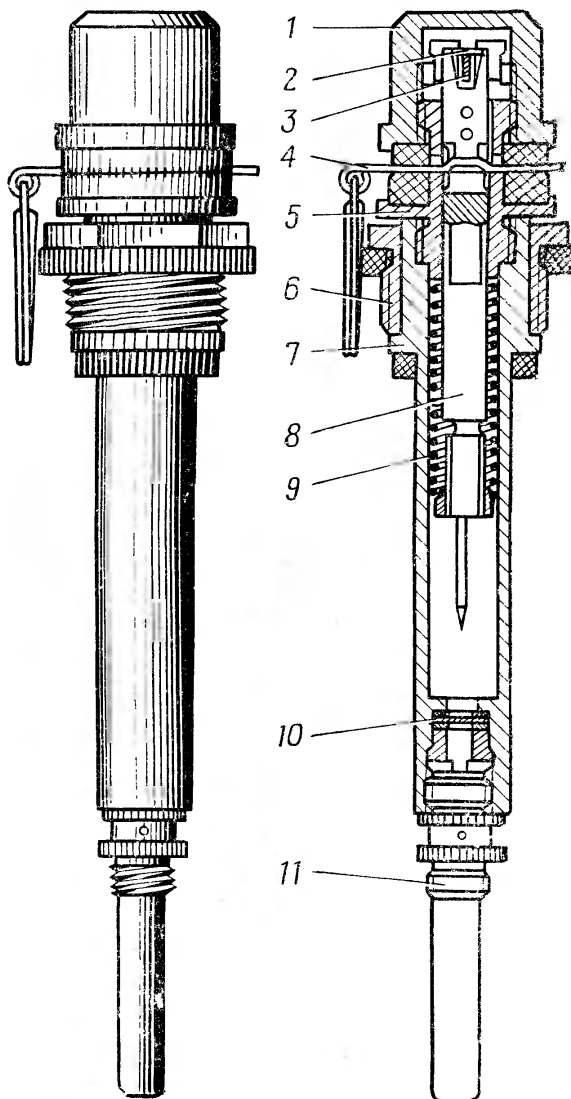

VZD-1M internal diagram



VZD-1M Firing Device

are contingent upon the ambient temperature where the device is employed.

The firing device consists of a main body, striker assembly, safety pin, detonator assembly, and various rubber gaskets. The body is aluminum and has a threaded cap on top. Just below the top it is externally threaded to screw into the limpet mines. The bottom of the body shaft is internally threaded to accept the detonator assembly. The striker assembly screws into the top of the body. The striker has a shear wire in the top under which the lead shear strip is inserted. The striker spring surrounds the

striker shaft held in place by a guide washer near the bottom end and the body of the striker assembly at the top. A long, sharp and thin striker head is mounted at the bottom of the striker shaft. The striker is held in the cocked position by the safety pin. An MD-2 or MD-5M detonator assembly screws into the bottom of the body shaft. The various rubber gaskets ensure the device is waterproof for underwater use.

Before being placed into operation, the cap is removed and a lead alloy shear strip, suitable for the timing delay required, is inserted below the striker's cutter. Seven colour-coded shear strips are available (unpainted, red, black, white, green, brown and one unknown), these covering average time delays at +20°C of 15 mins to 373 hours. Once the shear strip is installed and the cap replaced, the firing device is inserted into the mine or demolition charge. The explosive charge is then emplaced, and the safety pin removed. When the safety pin is removed, the shear wire contacts the shear strip and under pressure from the striker spring cuts through the strip. Once the strip is severed the striker is released to drive down under pressure of its spring, onto the percussion cap of the detonator assembly initiating it and the attached charge.

VZD-3M (B3Д-3M)

Type - Delay

Weight - VZD-3M - 0.6 oz. (17 g)

Length - VZD-3M - 2.6 in. (66 mm)

Diameter - VZD-3M - 0.5 in. (12.7 mm)

This device is primarily intended as a fuze for the Russian BPM, MPM, SPM, and UPM limpet mines. However, it can be readily adapted for use with other demolition charges, such as the KZU and MKZ series. It uses a metal fatigue, or shear principle, to provide the delay, similar to the PMN mine. The delay times vary from 15 minutes to 75 hours (some sources claim 360 hours) and are very sensitive to the ambient temperature. The lower the temperature, the longer the delay.


This device consists of a body, cap, striker, delay strip and detonator assembly. The body is made of aluminum and is turned down at the top end to make a thin shaft. The body is drilled out with a larger section at the bottom end and smaller section in the upper end. It is not drilled through at the top. The bottom end is internally threaded to accept the detonator assembly. Just below the thin shaft at the top it is externally threaded to accept the closing cap. The shaft is slotted twice, one to fit the delay strip and the other to fit the shear wire on the striker. The cap is simply an aluminum threaded cap to close the top end of the fuze. The striker is made up of a thin shaft, threaded to accept a guide washer. It has a shear wire attached to the top end and a very sharp striker point mounted in the bottom end. The delay strips come in four colours each corresponding with a delay period. They are made of a lead alloy with varying hardness. A set is issued with each device. The detonator assembly is either the standard MD-2 or MD-5M.

When assembled the striker and spring are inserted from the bottom with the shaft fitting up into the smaller section at the top of the body. As it is pushed up, compressing the spring, the shear wire fits into the slot at the top of the body shaft. A safety pin fits through a hole in the shaft and through a corresponding hole in the striker shaft. The safety pin is bent to fit through the shaft and up the side of the shaft with a small ring on the top end to cover the top of the shaft. The delay strip fits into the opposing slot fitting under the shear wire. A small press fit cap covers the top of the body shaft and holds the delay strip in position. The shape of the safety pin assists in holding the press fit cap in place. The body cap is then screwed on.

For use the appropriate strip for the time delay is chosen and put in place in the device. The detonator assembly is then screwed in place. When the device has been inserted in the charge the cap is removed and the safety pin withdrawn. This allows the striker spring to assert pressure downwards bringing the shear wire in contact with the delay strip. The cap is then screwed back on. The shear wire slowly cuts through the delay strip until it severs it. At that point the striker is free to be driven



downward under pressure of the spring until it hits the percussion cap in the detonator assembly. The cap fires causing the detonator to fire and detonate the main charge.

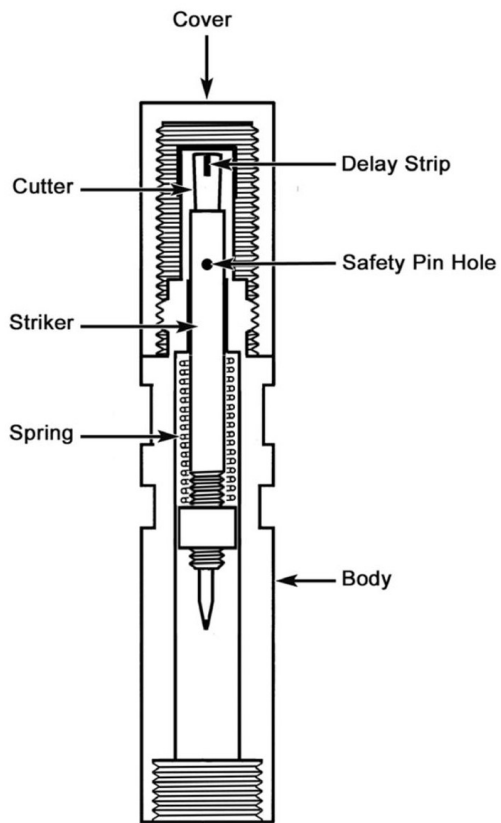

VZD-3M internal diagram

VZD-6Ch (B3Д-6Ч)

Type - Delay

Weight - 7.7 oz. (219 g)

Length - 3.3 in. (85 mm)

Width - 1.7 in. (45 mm)

Height - 0.7 in. (20 mm)

This is a simple mechanical clockwork delay mechanism. It is normally used in conventional demolition operations; however, it can also be used as a boobytrap or sabotage device. It will provide a delay of 15 minutes to 6 hours.

The device consists of a casing, clockwork mechanism, striker mechanism and uses either an MD-2 or an MD-




VZD-6Ch Front with casing removed
Photo- G. Zahaczewsky



VZD-6Ch Firing Device
Photo- G. Zahaczewsky

5M detonator assembly. The casing is made of steel and has a knurled nut on the top. The bottom of the casing is a cap that has the clockwork and striker mechanisms mounted to it. The upper casing fits over the entire device and fits into the lower casing cap. When assembled the nut on the upper casing is screwed onto a threaded stud on the clockwork mechanism. The bottom cap also has a threaded well to screw the detonator assembly into. The well is closed by a threaded plug. The clockwork mechanism has a dial in the centre with two small studs on it. There are two arrows around the dial, one black and one white pointing in opposite directions. A small window and indicator are located just below the dial. The time delay disc shows through the window. The striker mechanism is located to the side of the clockwork mechanism.

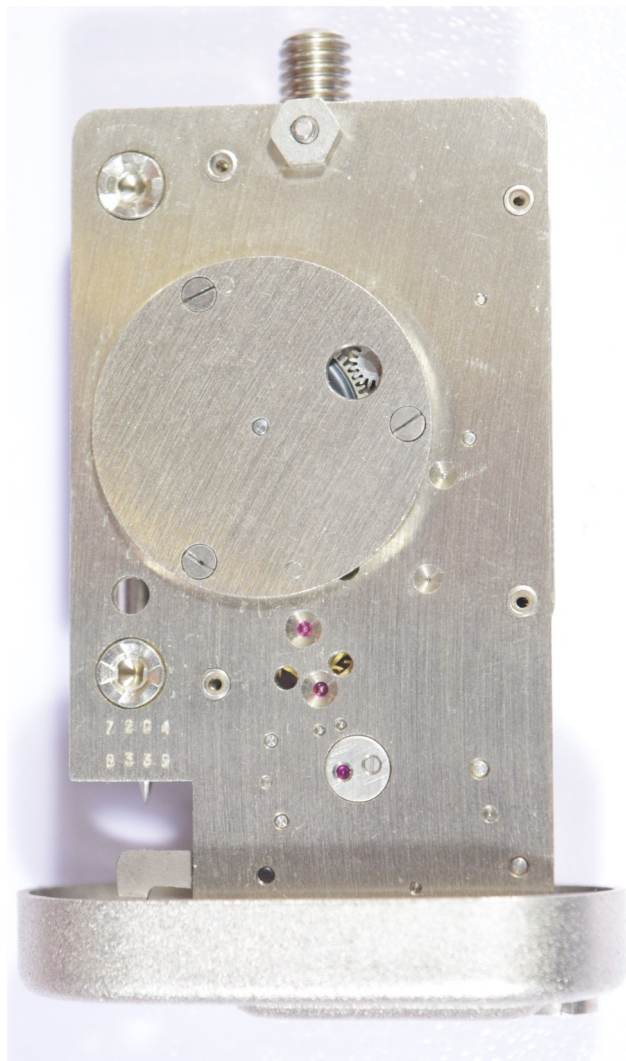

For use, the upper casing is removed by unscrewing the knurled nut. The clockwork mechanism is wound by turning the dial in the direction of the black arrow. When wound, and while pushing up on the collar on the striker turn the dial in the direction of the white arrow until the desired delay is displayed by the numbers on the time delay disc. The device is reassembled and the plug closing the detonator well removed and replaced by the detonator assembly. Shake the device to ensure the mechanism starts. When started, a ticking sound should be heard. Once the delay has expired the clockwork mechanism trips the striker mechanism allowing the striker under pressure of its spring to stab down into the primer in the detonator assembly.

VZD-6Ch Back with casing removed

Photo- G. Zahaczewsky

VZD-12Ch (B3Д-12Ч)

Type - Delay

Weight - 2.9 oz. (85 g)


Length - 3.9 in. (100 mm)

Width - 2.1 in. (54 mm)

Height - 0.5 in. (12.8 mm)

The VZD-12Ch is a self-contained firing device that is intended to be used for boobytrap or sabotage operations. It contains a detonator (blasting cap) and an analog timer that can be set for firing delays up to 12 hours. It also contains a power source and a mechanism that will function the device if it is moved.

To place the VZD-12Ch into operation, a firing time is selected on the analog timer. A safety pin is then withdrawn from the device, which initiates a 15-minute arming delay. At the expiration of the arming delay - or of the device is moved - the VZD-12Ch will function.

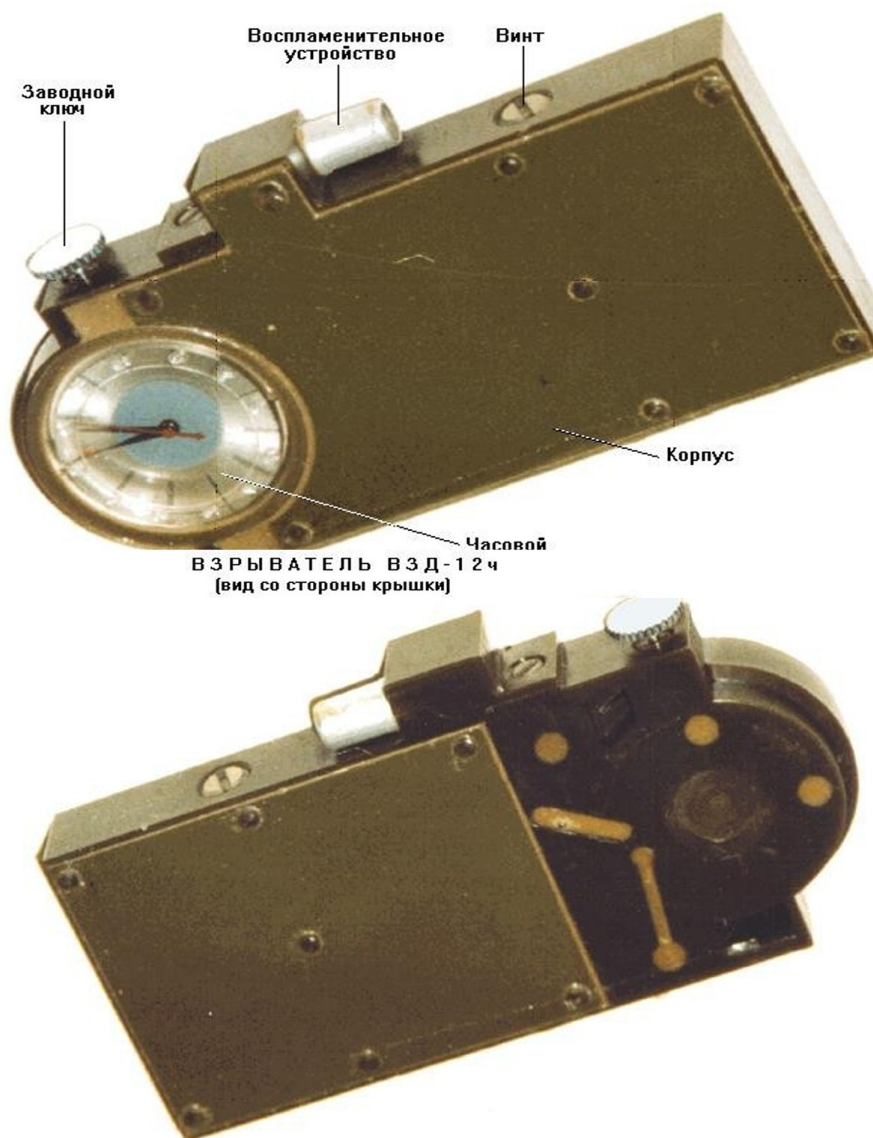

VZD-12Ch Firing Device

VZD-20M (B3Д-20M)

Type – Delay


Weight – 19.4 oz. (550 g)

Length – 6.125 in. (155 mm)

Diameter – 2.0 in. (50 mm)

This is a mechanical clockwork delay firing device primarily intended as a fuze for the Russian SPM and UPM limpet mines. However, it can be readily adapted for use with other demolition charges. It can be set for delays of 1, 2.5, 4, 6, 8, 10, 12, 14, 16, 18, and 20 hours. Accuracy of the delay is 12% for shorter periods and 2% for longer

periods of time. The devices will function up to a depth of 130 feet (40 m).

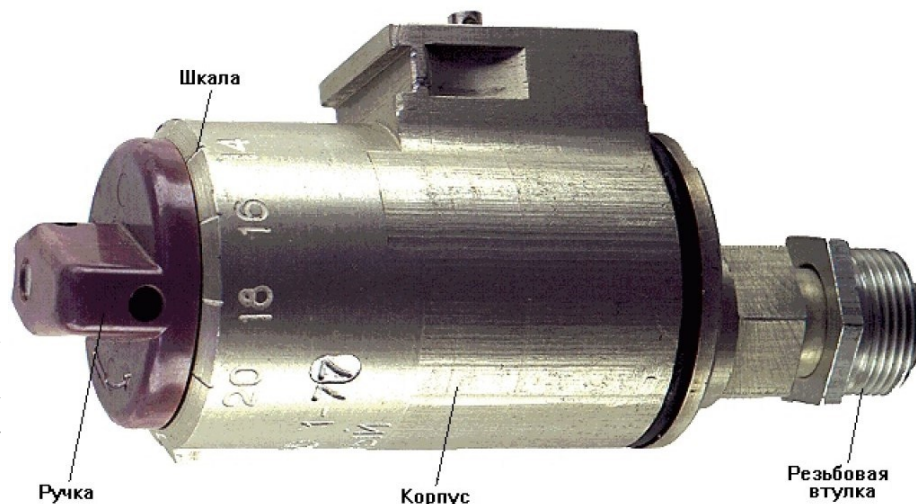

VZD-20M Firing Device

The device consists of a main body (корпус), which includes a rotating time setting dial (ручка), a built-in safety mechanism, a clockwork delay mechanism, and a striker assembly. The firing device normally utilizes an MD-5M detonator assembly, which is screwed into a threaded plug (резьбовая втулка) to initiate the attached mine or demolition charge. The main body of the firing device has a square appendage that contains part of the arming and safety mechanism of the device.

To place the firing device into operation, the setting dial is rotated to the desired setting using the scale (шкала) engraved into the body of the device. The MD-5M is then screwed into the threaded plug, and the firing device inserted into the mine or demolition charge. The safety is removed from the appendage on the device initiating the clockwork delay. While the device is operating the setting dial will rotate. When the firing device reaches its preset time, an internal lever is tripped, which initiates the firing sequence.

This firing device utilizes the same clockwork delay mechanism as found in the Russian VZD-144 series firing devices. An inert training version, U-VZD-20M, is known to have been produced.

VZD-100Ch (B3Д-100Ч)

Type – Delay

Weight – 4.0 oz. (115 g)

Length – 4.6 in. (117 mm)

Width – 2.6 in. (68 mm)

Height – 0.8 in. (22 mm)


The VZD-100Ch is a programmable, battery-powered, electronic delay firing device that can be set for a delay of 16 minutes up to 99 hours and 59 minutes. The firing device is used with the MD-5M detonator, and can be employed in mines or demolition charges.

The firing device is actually a two-part system. One part is the firing device itself, while the second part is the PZ-01 programming device that electronically sets the time delay in the VZD-100Ch. Both components have polymer plastic bodies. The firing device includes a positive safety pin, a battery compartment, and the electronic circuitry to arm and initiate the device.


To place it into operation a 7RTS53U battery is inserted into the firing device. A red LED will indicate if a fully charged battery is properly installed. The firing device is then plugged into the programming unit with the battery powering both components. The desired time delay is then selected on the PZ-01. The firing device is then disconnected from the programming unit. The positive safety pin is removed. If the firing device is ready for use, the LED will flash. An MD-5M detonator is then screwed in and the firing device connected to the mine or demolition charge. An

arming delay of eight minutes is built into the firing device before the desired time delay is initiated.

If a PZ-01 programming device is not available, a default delay time will be initiated as soon as the positive safety is removed from the VZD-100Ch.

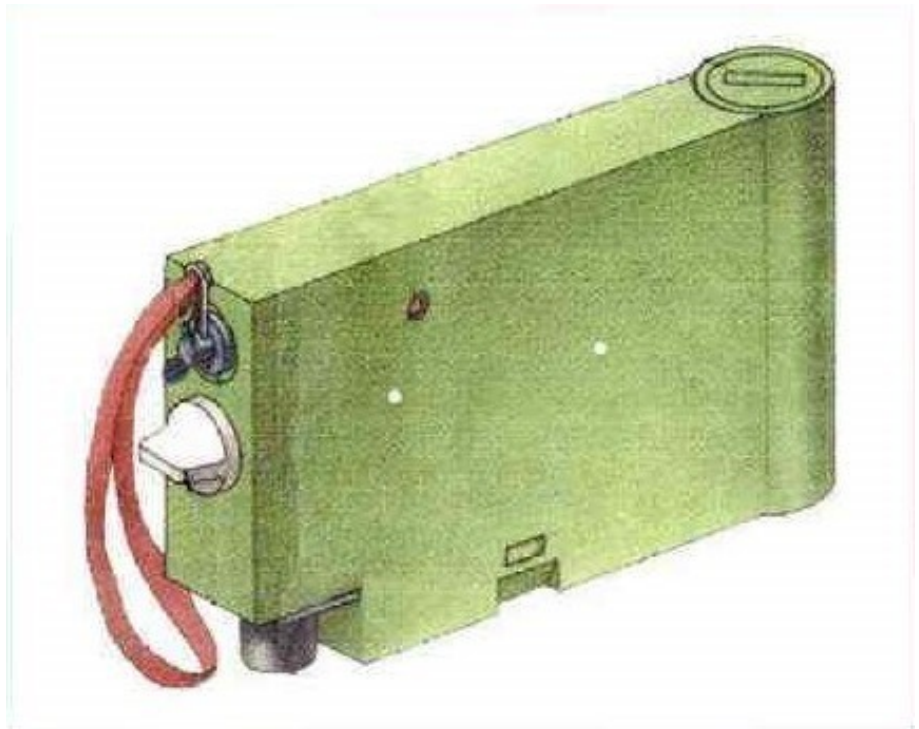

VZD-100Ch Firing Device

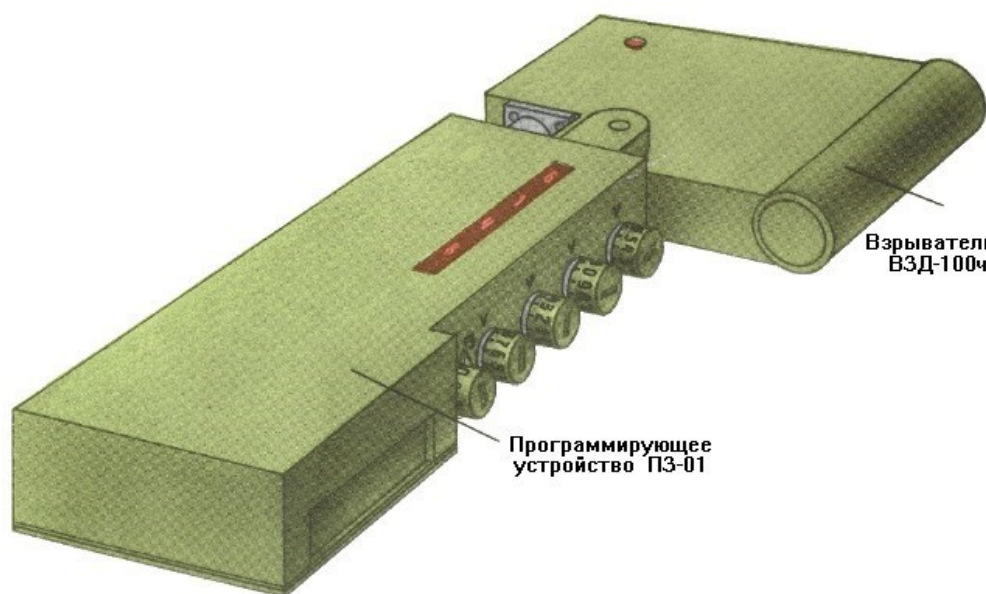

The VZD-100Ch coupled with the PZ-01 programming unit

VZD-135 (B3Д-135)

Type – Delay

Weight – 7.5 oz. (215 g)

Length – 4.7 in. (121 mm)

Width – 2.6 in. (68 mm)

Height – 1.1 in. (29 mm)

The VZD-135 is a battery-powered, electronic delay firing device manufactured prior to 2012. It can be set for an initiation time of 60, 180, or 300 seconds with an arming delay of 30 seconds. The firing device has a plastic body, and uses an A316 (1.5V, Size AA) battery as a power source. The VZD-135 uses an MD-5M detonator and can be employed in either mines or demolition charges. The firing device was developed and produced by the Scientific Engineering Institute in Balashikha, Russia (State Factory 582).



VZD-135 Firing Device

To use the VZD-135, an A316 battery (or equivalent) is inserted into the device. The selector switch on the device is moved from the "T" position to the "K" position. This supplies power to the electronics unit inside the device, and the indicator light begins to flash every two seconds, indicating that the firing device is functioning and in a safe position. When the selector switch is moved from the "T" position to the delay time setting position "1", "3" or "5", the countdown of the arming time and the delay time begins simultaneously, and the indicator light does not illuminate. At the end of the delay time, an internal capacitor discharges into the electric igniter which allows the striker to impinge the MD-5M detonator (blasting cap) installed in the sleeve. This initiates the detonation of the attached explosive charge.

VZD-144 (B3Д-144) and VZD-144Ch (B3Д-144Ч)

Type – Clockwork delay

Weight – VZD-144 - 15.8 oz. (450 g)

VZD-144Ch - 12.2 oz. (346 g)

Length – VZD-144 - 4.8 in. (100 mm)

VZD-144Ch - 2.9 in. (74 mm)

Diameter – VZD-144 - 2.3 in. (60 mm)

VZD-144Ch - 1.9 in. (50 mm)

The VZD-144 is a spring-wound, delayed action firing device used to initiate an MD-5M detonator, or to close an electrical firing circuit when fitted with an appropriate adapter. It can be set for a delay of 30 minutes, or up to 144 hours (six days) with a 10% accuracy. It is similar in operation to the VZD-144Ch, but differs in the body material (the VZD-144Ch is all-metal construction), physical dimensions, as well as the additional clamps used to attach the device to a target (the VZD-144Ch has none). These firing devices can be used in a conventional demolition role, or as boobytraps, and have been encountered in Afghanistan.

The VZD-144 is constructed mainly of Bakelite, with some metal components. One end of the Bakelite



VZD-144 Firing Device
Photo- Oleksandr Mariash



Top of VZD-144 with cover off
Photo- Oleksandr Mariash

body contains a cap-covered clockwork mechanism, a winding key, and two safety pins. The other end contains a receptacle for the MD-5M detonator, or the adapter for the electrical firing circuit. On the side of the body is a clamp for securing the firing device to a target.

The first step in using the VZD-144 is to remove the closure cap and wind the clockwork mechanism. The next step is to set the delay initiation time utilizing the time-setting tool that is provided with each firing device. While viewing the face of the firing device, there are two sets of numerals visible – red numbers indicating hours (in 30-minute increments), and black numbers indicating days. Using the fuze setting tool, the dials are rotated until the desired number is positioned over the arrow indicator on the face of the

firing device. Once this has been accomplished, the closure cap is replaced, and an MD-5M detonator (or electrical circuit adapter) is attached. The firing device is then inserted into the demolition charge, and the two safety pins are removed. The VZD-144 is now armed and functioning.



VZD-144Ch Firing Device



VZD-144Ch with cover off and showing time setting tool.

VZDKh (B3/X)


Type - Delay

Diameter - 0.9 in. (25 mm)


Height - 6.0 in. (157 mm)

The VZDKh is an older mechanical-chemical delay type firing device developed during the Second World War.

This fuze has a cylindrical body with a smaller tube located in the side of the cylinder. The top of the body is closed by a threaded cap. The bottom of the body is internally threaded to accept either

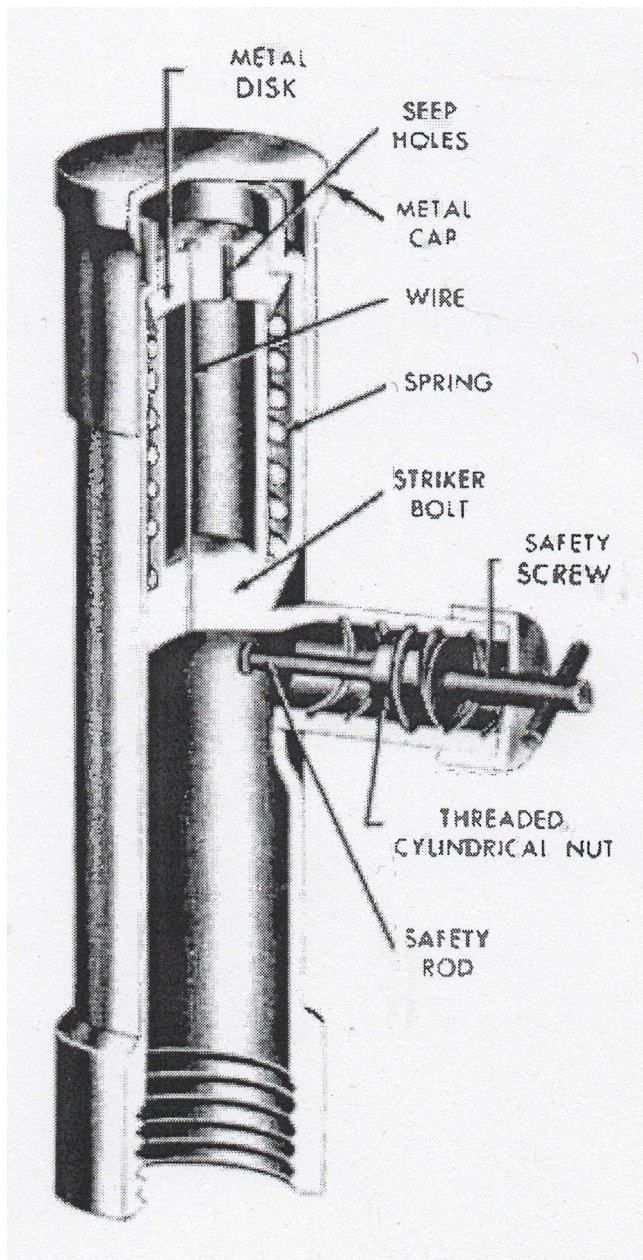


VZDKh internal diagram

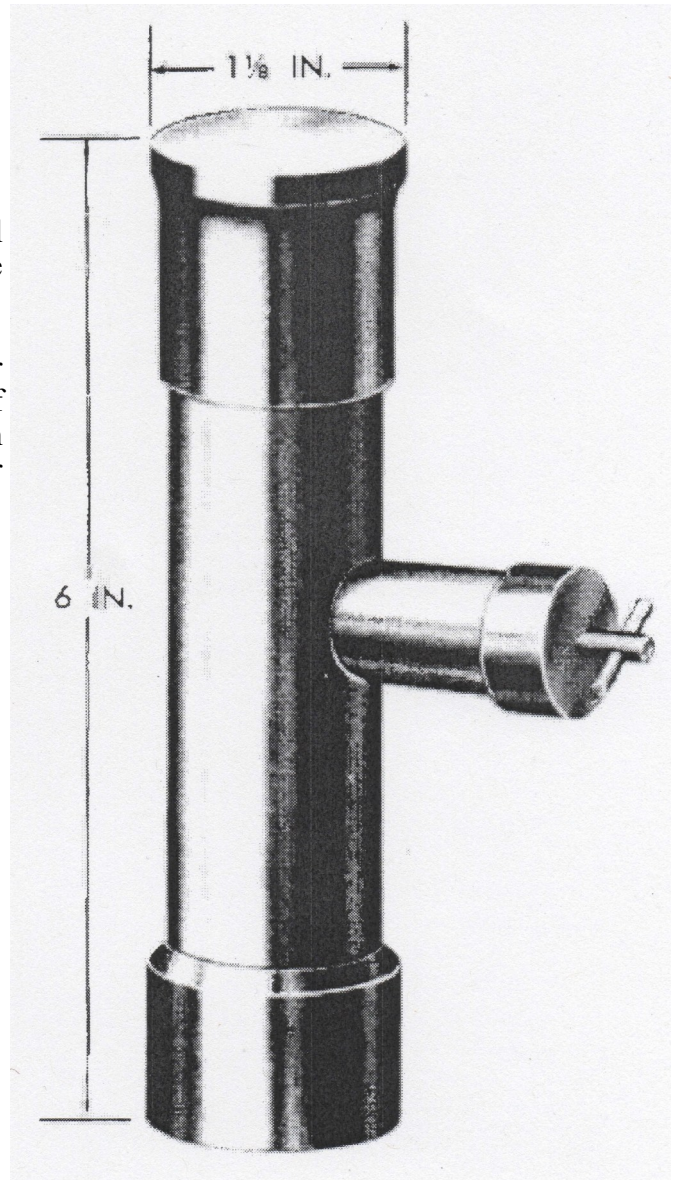

VZDKh Firing Device

an electrical or chemical base. The safety screw assembly is located in the smaller tube on the side of the body. The tube is internally threaded to accept a threaded nut with a safety rod on the inner end and a turning shaft on the outer end. The turning shaft protrudes through a threaded cap. The spring-loaded striker assembly is located in the upper half of the body. The striker assembly consists of a striker bolt, striker spring, retaining wire and metal disc. The striker bolt is hollow and has a head to fit the inside of the tube. Just above the head the diameter is reduced to allow the striker spring to fit between the bolt and body tube. The metal disc has a flange on the top to fit over the top of the tube and a reduced section to fit inside the striker bolt. There are seep holes through the disc. The striker spring is compressed between the

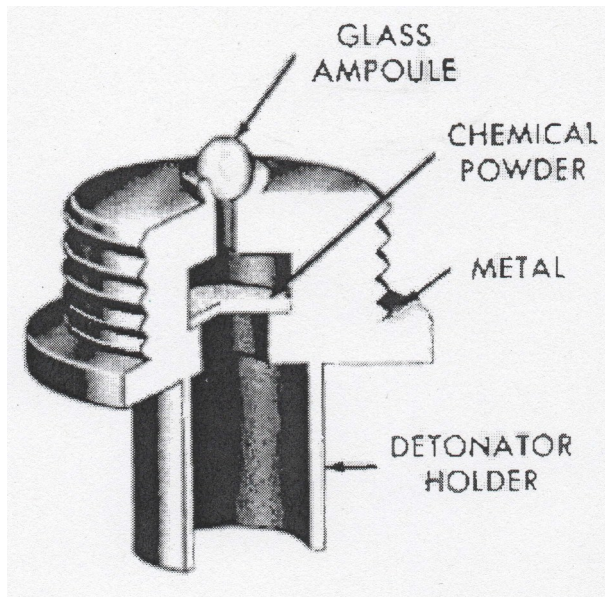

Chemical base for VZDKh


flange on the disc and striker head. A wire between the striker head and disc holds the assembly together. When assembled the safety screw is fully screwed in so that the safety rod fits into the tube blocking travel of the striker bolt.

There are two bases that can be used with this device. The first is a chemical base made of metal and threaded to fit the threads in the bottom of the body. A detonator holder is attached to the bottom of the base. Internally there is a chemical powder. Mounted to the top is a glass ampoule containing acid with a hole under it. A nonelectric detonator is used with this base.

The second type of base is an electrical contact type with the main body made of Ebonite. A metal base the same diameter of the Ebonite section has a reduced diameter on top to fit up into the Ebonite base. Contained within the Ebonite portion is a striker and spring. The top of the striker protrudes out the top of

the base and is held in that position by the spring. A screw through the side of the Ebonite base serves to fasten the metal base in position and acts as an electrical contact. A wire is attached to the screw. The bottom centre of the metal base has a rubber washer fitted. A screw contact through the rubber washer acts as a second electrical contact and has a wire attached to it. The rubber washer insulates the bottom contact from the metal base.

For use ensure the safety screw is screwed in. Screw in the appropriate base and place the fuze in the charge or connect it to an electrical detonating circuit. Unscrew the top cap and pour sulfuric acid into the hole in the cylinder. Replace the top cap and unscrew the safety screw. The sulfuric acid seeps into the hollow striker bolt and begins to corrode the striker retaining wire. Eventually the wire will break and free the striker bolt to move downward under pressure of the striker spring until it hits the base. If the chemical base is used the striker bolt breaks the ampoule of acid allowing the acid to drip onto the chemical powder. A reaction between the two causes a flash that travels into the nonelectric detonator causing it to fire. If the electrical base is used the striker bolt hits the top of the striker and drives it down against the pressure of its spring. The striker will contact the screw contact in the bottom of the base and close the electrical circuit.

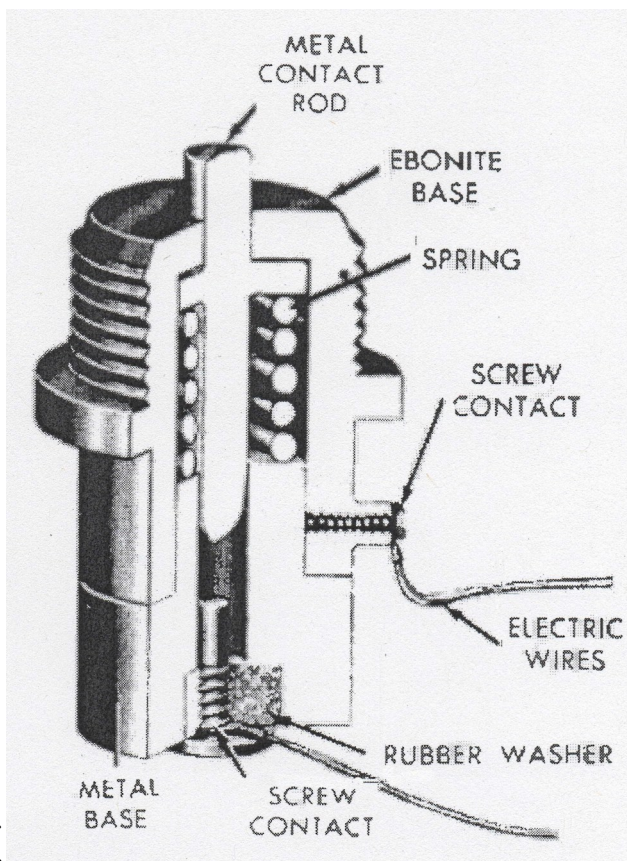

Electrical base for VZDKh

MD-2 (MД-2) Detonator Assembly

Length - 2.3 in. (60 mm)

Diameter - Adapter 0.6 in. (15 mm)

Detonator 0.2 in (6 mm)

This non-electric detonator assembly was used with many of the Russian mines and firing devices. It is an older assembly and has been replaced by the newer MD-5M detonator assembly. While unlikely, it may still be found in use.

The assembly consists of an adapter, KV-11 stab sensitive primer, and TAG 8A or TAT-8 detonator. The adapter is either metal or plastic. The upper end is threaded to screw into various firing devices and mine fuzes. The upper end has the primer mounted in the centre. There is a raised and knurled band around the adapter just below the upper threaded section used as a gripping ring. Below the ring is a stud for the detonator to be crimped on. Once crimped on the detonator is sealed with a black sealing compound.

Inert training versions have a white band around the detonator and are designated as "U-MD-2". A red band indicates a practice detonator with a small pyrotechnic charge and are designated UI-MD-2.



MD-2 Detonator Assemblies

MD-5 (MД-5) Detonator Assembly

Length - 2.0 in. (50 mm)

Diameter - 0.5 in. (13 mm)

This non-electric detonator assembly replaced the MD-2 assembly in the late 1950's or early 1960's. It is used with many of the Russian firing devices and mine fuzes.

The assembly consists of an adapter, KV-11 stab sensitive primer and TAG-8A or TAT 8A detonator. The adapter has two threaded ends with a wide knurled band in the centre. The upper end is threaded to screw into various firing devices and mine fuzes. The lower end of the adapter to screw into charges. The primer is mounted in the centre of the top end and the detonator mounted in the bottom end.

Inert training versions have a white band around the detonator and are designated as "U-MD-5". A red band indicates a practice detonator with a small pyrotechnic charge and are designated UI-MD-5.




MD-5 Detonator Assemblies

MD-5M (МД-5М) Detonator Assembly

The differences between the MD-5 and MD-5M are difficult to determine and may simply come down to the sealing lacquer used on the joint between the adapter and detonator.

It appears that earlier versions of the MD-5M had a slightly different adapter that has two raised knurled rings rather than the one larger one. These have been changed to the one larger ring for later versions.

Inert Training versions have a white band around the detonator. Inert training versions are designated "U-MD-5M". A red band indicates a practice version containing a small pyrotechnic charge and are designated UI-MD-5M.

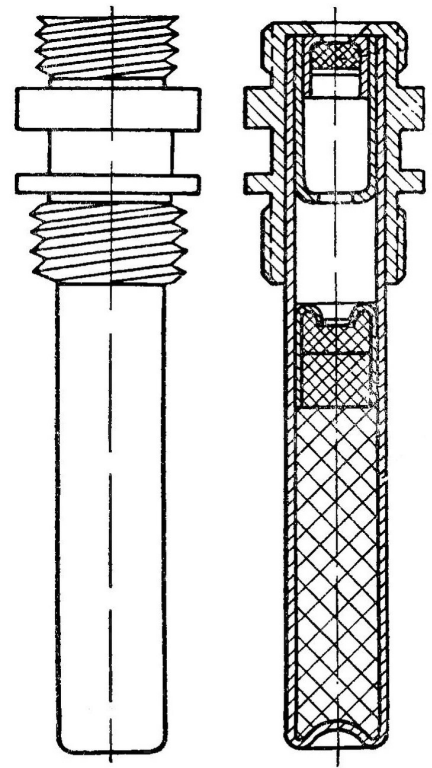

MD-5M Detonator Assembly

EDP (ЭДП) and EDPr (ЭДПр) Detonator Assemblies

Length - EDP - 1.8 in. (47 mm)

EDPr - 2.2 in. (54 mm)

Diameter - Adapter - 0.5 in. (12 mm)

Detonator body - 0.2 in. (7 mm)

The EDP and EDPr detonator assemblies are the standard electric detonators used in Russian mines and firing devices. The EDPr is the newer version and differs from the EDP in that it has a knurled adapter that can be screwed into various explosive charges. The TAT-8A detonator body is constructed of aluminum, and is filled with Tetryl as the main charge. Each strand of the firing wires is 1 metre long.

The detonator assemblies are unmarked and the colour of wire is unregulated. Inert training versions (U-EDP and U-EDPr) have an annular white band around the middle.



*EDPr Detonator Assembly
Photo- G. Zahaczewsky*

NM (HM)/NM-71 (HM-71) Initiator

Weight – 1.4 oz. (40 g)

Length – 2.1 in. (53 mm)

Diameter – 1.1 in. (25 mm)

The NM (alternate designation NM-71) initiator is an electro-pyrotechnic device to allow electrical initiation of non-electric detonators, such as the MD-5M. It can also be screwed directly onto the detonators contained in various Russian antipersonnel mines. The NM initiator is a component of the MVE-72 firing device, but can be incorporated into any electric firing system to detonate mines, boobytraps and other explosive charges.

It is of one-piece construction, with the body made of Bakelite plastic. Inside the body there is an electric squib and a pyrotechnic composition that, once electrically initiated, will drive an internal firing pin into the primer of a non-electric detonator. Each of the electrical leads is 12 inches (30.5 cm) in length.



*NM Initiator with inert MD-5M
Detonator*

Photo—G. Zahaczewsky

VZD (B3Д) Contact Switch

Type – Electronic Circuit Closer

The VZD contact switch is used to allow the delayed completion of an electrical circuit to initiate a mine or an explosive charge. The switch is screwed into an appropriate firing device, such as the EKbV-7, or MUV-2, MUV-3, or MUV-4. It is most commonly used with an electric detonator such as the EDPr.

It is of one-piece construction, and the knurled body is made of Bakelite. The body is externally threaded, which allows it to be screwed into a firing device. The top part of the switch has an open contact switch that is closed when the striker of the attached firing device is released into it. The bottom part of the switch has two wires protruding from it that are attached to the electric detonator.



VZD Contact Switch



VZD contact switch with EKbV-7



VZD contact switch with MUV-2

ZTP-T (3TII-T) and ZPT-M (3TII-M)

Type – Fuse Lighters

Length – ZTP-M - 1,8 in. (46mm)

Diameter – ZTP-M - 0.4 in. (12mm)


These are manufactured ignition sets complete with fuse lighter and detonators. They are fitted with a friction lighter or a mechanical percussion igniter.

The ZTP-T has a Bakelite body mounted on a brass tube. The body has a threaded cap screwed into the bottom portion. The brass tube contains a pyrotechnic friction pellet with a wire passing through a hole in the centre of the pellet. The bottom end of the wire is coated with a friction compound and coiled into a spiral. The top end of the wire is attached to a nylon thread that is attached at the other end to the body cap. The bottom end of the brass tube is crimped onto the fuse.

When the cap is uncrewed and pulled, it pulls the friction wire through the pyrotechnic pellet causing it to flash and burn to ignite the fuse.



*ZPT-T Friction Lighter
Photo- Oleksandr Mariash*

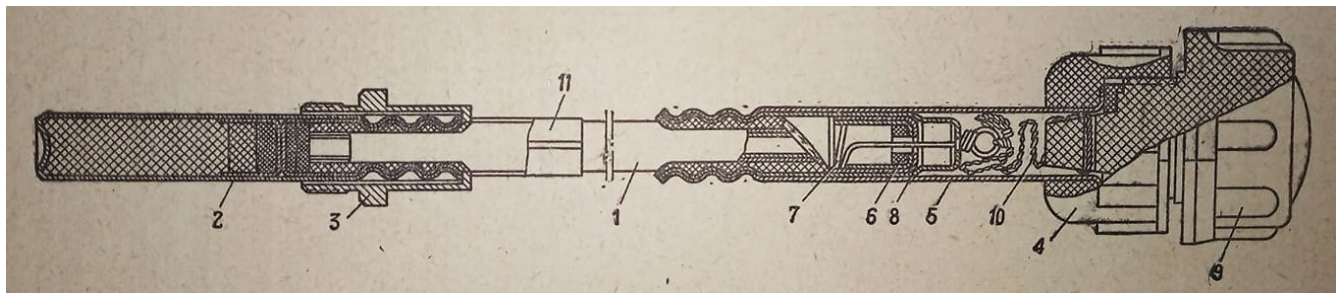

Internal diagram of ZTP-T Friction Lighter on ZTP-50

1- Fuse, 2- Detonator, 3- Adapter, 4- Body, 5- Brass sleeve, 6- Ignition pellet, 7- Friction Wire, 8- Ignition pellet body, 9- Cap, 10- Nylon cord, 11- Marking sleeve

The ZTP-M percussion igniter has a tubular metal body internally threaded at the bottom end. The body contains a striker and striker spring. The striker spring is compressed by the striker and held in place by a flat release pin through a slot in the striker. A pull ring is fitted into a hole in the release pin. The top of the body has two slots, one deep one and a shallow one. When the release pin is in the deep slot it cannot be removed, when in the shallow slot it can. A threaded fuse adapter must be crimped onto the fuse. The fuse adapter has a percussion cap mounted in the centre.

For use the fuse adapter is screwed onto the lighter mechanism. The release pin must be lifted and rotated 90 degrees until it disengages the deep slot and engages the shallow slot. The pin can then be pulled out, releasing the striker to drive down onto the percussion cap. When the percussion cap fires it ignites the fuse.

ZTP-50 (3TH-50)

Type - Ignition Set

Weight - 1.7 oz. (50 g)

Length - 21 in. (55 cm)

Diameter - 0.2 in. (5 mm)


The ZTP-50 can be found with either of the two fuse lighters. The fuse is crimped on the lighter at one end and onto a threaded nipple at the other. The detonator (No. 8A) is crimped onto the nipple. Use of the threaded nipple ensures that it can be screwed into TNT charges with ignition wells with the same threading.

This device has a length of fuse to give a delay of 50 seconds (+/- 2.5 seconds). It can be used for charges underwater to a depth of 5 metres, but the burning time is reduced to 40 seconds (+/- 2.0 seconds). It should be noted that the lighter should be activated above water.

The detonator set is marked with an aluminum sleeve on the fuse near the detonator with "50" stamped into it and filled with black paint. The fuse is grayish white.



ZTP-M Mechanical Percussion Lighter

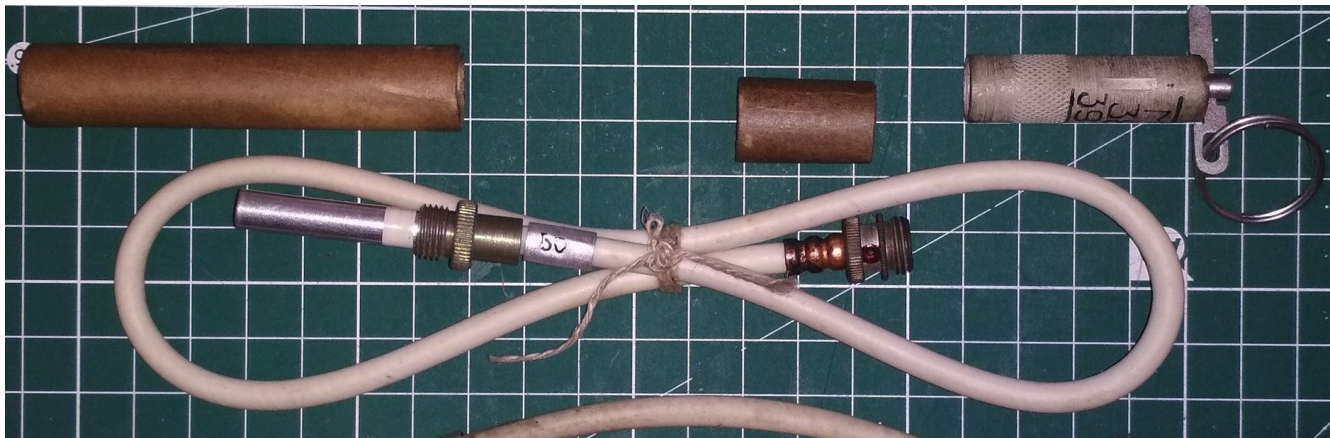

*ZTP-M and ZTP-50
Photo- Oleksandr Mariash*

ZTP-150 (ЗТН-150)

Type - Ignition Set

Weight - 2.6 oz. (75 g)

Length - 61 in. (155 cm)

Diameter - 0.2 in (5 mm)

The ZTP-150 can be found with either of the two fuse lighters. The fuse is crimped on the lighter at one end and onto a threaded nipple at the other. The detonator (No. 8A) is crimped onto the nipple. Use of the threaded nipple ensures that it can be screwed into TNT charges with ignition wells with the same threading. This device has a length of fuse to give a delay of 150 seconds (+/- 7.5 seconds). It can be used for charges underwater to a depth of 5 metres, but the burning time is reduced to 100 seconds (+/- 5.0 seconds). It should be noted that the lighter should be activated above water.

The detonator set is marked with an aluminum sleeve on the fuse near the detonator with "150" stamped into it and filled with black paint. The fuse is grayish white.

ZTP-300 (ЗТН-300)

Type - Ignition Set


Weight - 2.3 oz. (65 g)

Length - 39 in. (100 cm)

Diameter - 0.2 in. (5 mm)

The ZTP-300 can be found with either of the two fuse lighters. The fuse is a slower burning type than that used on the ZTP-50 or ZTP-150. It is crimped on the lighter at one end and onto a threaded nipple at the other. The detonator (No. 8A) is crimped onto the nipple. Use of the threaded nipple ensures that it can be screwed into TNT charges with ignition wells with the same threading. This device has a length of fuse to give a delay of 360 seconds (+/- 18 seconds). It can be used for charges underwater to a depth of 5 metres, but the burning time is reduced to 300 seconds (+/- 5.0 seconds). It should be noted that the lighter should be activated above water.

The detonator set is marked with an aluminum sleeve on the fuse near the detonator with "300" stamped into it and filled with black paint. The fuse is blue.

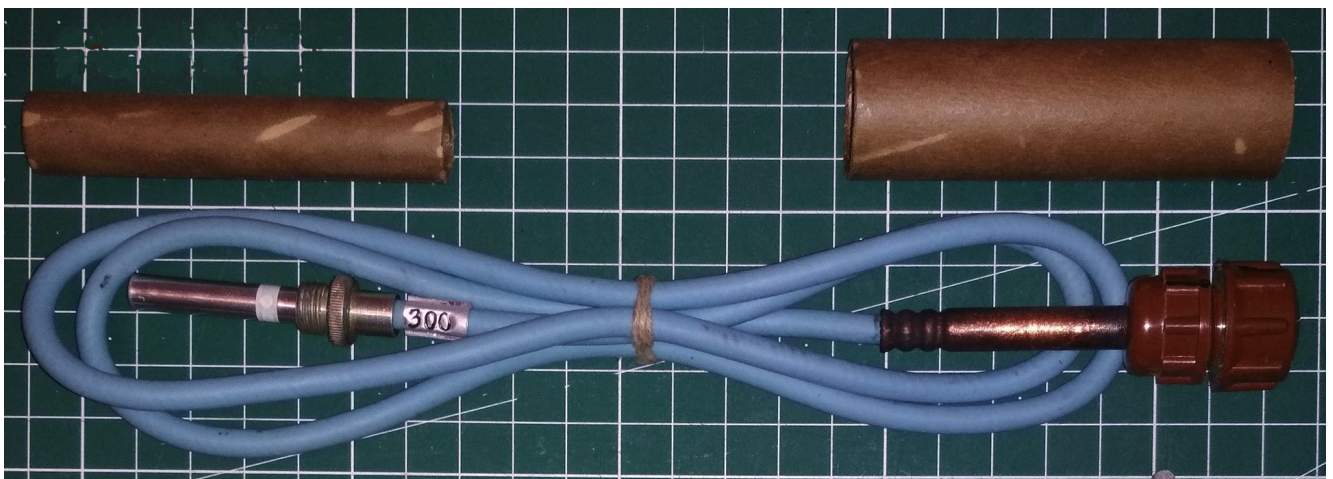

ZTP-T and ZTP-300

Photo- Oleksandr Mariash

ZTP-600 (ЗТП-600)

Type - Ignition Set

Length - 39 in. (200 cm)

Diameter - 0.2 in. (5 mm)

The ZTP-600 can be found with either of the two fuse lighters. It is crimped on the lighter at one end and onto a threaded nipple at the other. The detonator (No. 8A) is crimped onto the nipple. Use of the threaded nipple ensures that it can be screwed into TNT charges with ignition wells with the same threading. This device has a length of fuse to give a delay of 600 seconds. It can be used for charges underwater to a depth of 5 metres, but the burning time is reduced to 300 seconds (+/- 5.0 seconds). It should be noted that the lighter should be activated above water.

Manufacturers in this volume

Romania	ROMTEHNICA
Russia	State Factory K
Russia	State Factory 12
Russia	State Factory 55
Russia	State Factory 60
Russia	State Factory 121
Russia	Scientific Engineering Institute in Balashikha (State Factory 582)
Russia	Saranskiy Mechanical Plant (State Factory 583)
Russia	Scientific Research and Engineering Institute
Russia	Joint Stock Company “Scientific Research Engineering Institute (AO NIII)”
Russia	Joint Stock Company “Scientific Research Technological Institute, P.I. Snegireva”
Ukraine	Donetsk (State Factory 107)

Consolidated list of Manufacturers

	USA	A. C. Gilbert Co.
	USA	Automatic Temperature Control Co. Philadelphia, PA
ADI	AUS	Australian Defense Industries
B&P	GBR	Boon & Porter Ltd.
BUCK	DEU	Buck Chemisch-Technische Werke GmbH & Co.
BUL	USA	
CMZ	USA	Whittaker Corp, Columbus Milpar Div.
cqx	DEU	Friemann & Wolf GmbH, Zwickau
cyz	DEU	Anton Flettner Flugzeugbau GmbH, Berlin
CRC	GBR	Cravens Railway Carriage and Wagon Co. Ltd. Darnall, Sheffield
CY	GBR	Chorley
D over B	GBR	Blackwood Trading Co., Kingston-on-Thames
Denel	ZAF	Denel, South Africa
Diehl	DEU	Diehl- Ordnance Division, Rothenbach, Germany
dyz	DEU	Gustav Schortmann & Sohn, Leipzig
EA	GBR	Electric Apparatus Co., Vauxhall Works, London
EMI	GBR	Electric and Musical Industries
ESS	GBR	ESS Signs Ltd., Edgeware Road, Hendon
FFV	SWE	Forsvarets Fabriks Verken
FHH	GBR	
GHG	GBR	G. H. Garland & Co. Ltd, Nibthwaite Road, Harrow, Middlesex, England
gzx	DEU	Schreyer & Co., Spielwarenfabrik, Nuremberg
	USA	Geometric Stamping Co. Euclid, OH
	GBR	Gladhills
	USA	John W. Hobbs Corp.
IMI	ISR	Israel Military Industries
iwk	DEU	Industrie Werke Karlsruhe AG
	KOR	Koryu Pyrotechnics Co. Ltd.
KYC	USA	Keystone Alloys Co. Ltd.
Kynoch	GBR	Kynoch Ltd.
LNO	USA	
L over G	GBR	Gledhill
LIP	FRA	LIP, Besancon, France (watch manufacturer)
Łódź	POL	Łódź (later Mera Poltik) Clock Factory Łódź, Poland
LP	GBR	Lang Pen Company Ltd., Aubrey House, Ely Place, Holborn Circus EC1
MAI	USA	Maryland Assemblies Inc.
MAT	FRA	MAT (Manufacture Nationale d'Armes de Tulle
MDI	GBR	Ministry of Defence 1
MDSL	GBR	Mondial Defence Systems Limited.
ME	AUS	Maribyrmong Explosives
MMC	USA	Marquette Corp.
MRP	NLD	
MTL	USA	Mast Technology Inc. Independence MO
NJD	USA	Navajo Army Depot
OPI	USA	Ordnance Prod Inc.
PA	USA	Picatinny Arsenal
POF	PAK	Pakistan Ordnance Factories
	PAK	Armament Research and Development Establishment
PRB	BEL	Poudreries Reunies de Belgique, SA Belgium
PTR	NLD	PyroTechniek Rotterdam
PXC	USA	Ambac Ind Inc, Pace Co. Div.
RHN	USA	United States Army Ammo Depot.

RhS	DEU	Rheinmetall-Borsig AG, Werk Sommerda, Germany
RM LTD	GBR	
RM	DEU	Richard Rinker, Menden
	ROU	ROMTEHNICA
RR	DEU	Richard Rinker, GmbH, Menden/Iserlohn, Germany
	RUS	State Factory K
	RUS	State Factory 12
	RUS	State Factory 55
	RUS	State Factory 60
	RUS	State Factory 121
	BGR	State Factory 211
	RUS	Scientific Engineering Institute in Balashikha (State Factory 582)
	RUS	Saranskiy Mechanical Plant (State Factory 583)
	RUS	Scientific Research and Engineering Institute
	RUS	Scientific Research Engineering Institute (AO NIII)
	RUS	Scientific Research Technological Institute, P.I. Snegireva
SGK	USA	Security Signals Inc.
Schuco	DEU	Schreyer & Co., Spielwarenfabrik, Nuremberg
SND	USA	Seneca Army Depot
SNL	USA	
SPE	POR	Sociedade Portuguesa de Explosivos, SA
	USA	H.A. Sward Co. Inc.
S over J	GBR	J Lucas
	ZAF	South African Defense Industries
TGCo	GBR	The Gramophone Co.
TGSR	GBR	The Gramophone Co. Springfield Road
T over T	GBR	Tecalamit Ltd., Brentford
UDD	USA	
VS	ITA	Valsella, Italy
WASAG	DEU	Westfälisch-Anhaltische Sprengstoff-Actien-Gesellschaft, Goswig
WWE	USA	
	GBR	Wembley Electric Appliances
	USA	Universal Match Corp. Ferguson Mo.
Y over B	GBR	Bryant and May
	UKR	Donetsk (State Factory 107)
	YUG	Rudi Cajavec Defence Electronics, Banja Luka,

Credits for all books in TBRM series

This is by no means a complete list of credits or references. Many other people and institutions have helped in the production of these publications. Apologies to anyone we have missed.

Australian War Memorial
Bomb Techs Without Borders
Norman Bonney
Bernt Bosman
Darrol Vincent Bowlzer
Francis Caley
Mike Eldredge
Jim Geibel
Timothy Holland
ITO OMON "Sibir," Rosgvardia Directorate, Novosibirsk Region, Russia
Fenix Insight
Terry Keller
Colin King
Kyle Kochan
Jouko Kuisma
Rick Larson
Bob Leiendecker
Scott Lynch
Oleksandr Mariash
Leo Monkivitch
National Police of Ukraine, EOD Service
Jeff Osborne
Drew Prater
Dave Sampson
A. Skrobot
T. Mathew Smith
State Emergency Service of Ukraine
Colin MacGregor Stevens
CAT-UXO
Ukrainian 8th Special Forces Regiment, Explosives Service

References

Many Official Documents, Military Manuals, Training Circulars, notes and reports.

Commercial Books

Tombe Du Ciel	Eric Pierret
SOE Equipment Air dropped in Europe	Anders Thygesen & Michael Sode
Malice Aforethought	Ian Jones MBE
The British Spy Manual	IWM
Winston Churchills Toyshop	Stuart Macrae
Station 12, SOE's Secret Centre	Des Turner
Secret Agents Handbook of Special Devices	Mark Seaman
The Plumber's Kitchen	Donald B. McLean
OSS Weapons II, Second Edition	Dr. John W. Brunner, Ph.D.
SOE, The Scientific Secrets	Frederick Boyce and Douglas Everett

Websites

<http://tgrm.foxed.ca/>

<http://visualcollector.com/VisualCollectorLinks/Traps.htm>

<http://www.bocn.co.uk/vbforum/>

<http://www.millsgrenades.co.uk/>

<https://www.wk2ammo.com/forum.php?s=2acb9706ceecdd4ff1a5074bde7eae8>

<https://bulletpicker.com/index.html>

<https://www.facebook.com/groups/1500206753609155>

<http://saper.isnet.ru/index-mines.html>

<https://cat-uxo.com/>